

- Screw Drive -

- Without Waycovers -


Dimensions & Specifications

Model Number	Travel Length inches (mm)	Table Dimensions inches (mm)		Mounting Dimensions inches (mm)			Screw Length inches (mm)	Table (1) Weight lbs (kg)
		A	B	C	D	M		
250607-WC0	7.5 (190)	15.25 (387,3)	18.25 (463,5)	2.370 (60,2)	3	8	17.05 (433)	51.8 (23,5)
250614-WC0	14.5 (365)	22.12 (561,8)	25.12 (638,0)	2.310 (58,7)	5	12	23.92 (608)	65.6 (29,8)
250621-WC0	21.5 (545)	29.25 (742,9)	32.25 (819,1)	2.370 (60,2)	7	16	31.05 (789)	80.4 (36,5)
250628-WC0	28.5 (720)	36.12 (917,4)	39.12 (993,6)	2.310 (58,7)	9	20	37.92 (963)	95.2 (43,2)
250635-WC0	35.5 (900)	43.12 (1095,2)	46.12 (1171,4)	2.310 (58,7)	11	24	44.92 (1141)	110.0 (49,9)
250642-WC0	42.5 (1075)	50.12 (1273,0)	53.12 (1349,2)	2.310 (58,7)	13	28	51.93 (1319)	124.8 (56,7)
250656-WC0	56.0 (1420)	64.00 (1625,6)	67.00 (1701,8)	2.250 (57,1)	17	36	65.80 (1671)	153.4 (69,6)
251207-WC0	7.5 (190)	21.25 (539,7)	24.25 (615,9)	1.870 (47,5)	5	12	23.05 (585)	76.8 (34,8)
251214-WC0	14.5 (365)	28.12 (714,2)	31.12 (790,4)	1.810 (46,0)	7	16	29.93 (760)	91.6 (41,5)
251221-WC0	21.5 (545)	35.25 (895,3)	38.25 (971,5)	1.870 (47,5)	9	20	37.05 (941)	106.4 (48,3)
251228-WC0	28.5 (720)	42.12 (1069,8)	45.12 (1146,0)	1.810 (46,0)	11	24	43.92 (1116)	121.2 (55,0)
251235-WC0	35.5 (900)	49.12 (1247,6)	52.12 (1323,8)	1.810 (46,0)	13	28	50.92 (1293)	136.0 (61,7)
251242-WC0	42.5 (1075)	56.12 (1425,4)	59.12 (1501,6)	1.810 (46,0)	15	32	57.92 (1471)	149.8 (67,9)
251256-WC0	56.0 (1420)	70.00 (1778,0)	73.00 (1854,2)	1.750 (44,4)	19	40	71.80 (1824)	179.4 (81,4)

06 = 6 inch (152,4 mm) carriage length; 2 bearings; carriage weight = 14.0 lbs. (6,35 kg)
 12 = 12 inch (304,8 mm) carriage length; 4 bearings; carriage weight = 26.0 lbs. (11,79 kg)

Footnotes:

(1) Weight shown is with a 1.000 inch (25 mm) diameter screw, a NEMA 34 motor mount [0.54 lbs (0,24 kg)], and a C125 style [0.22 lbs (0,10 kg)] coupling.

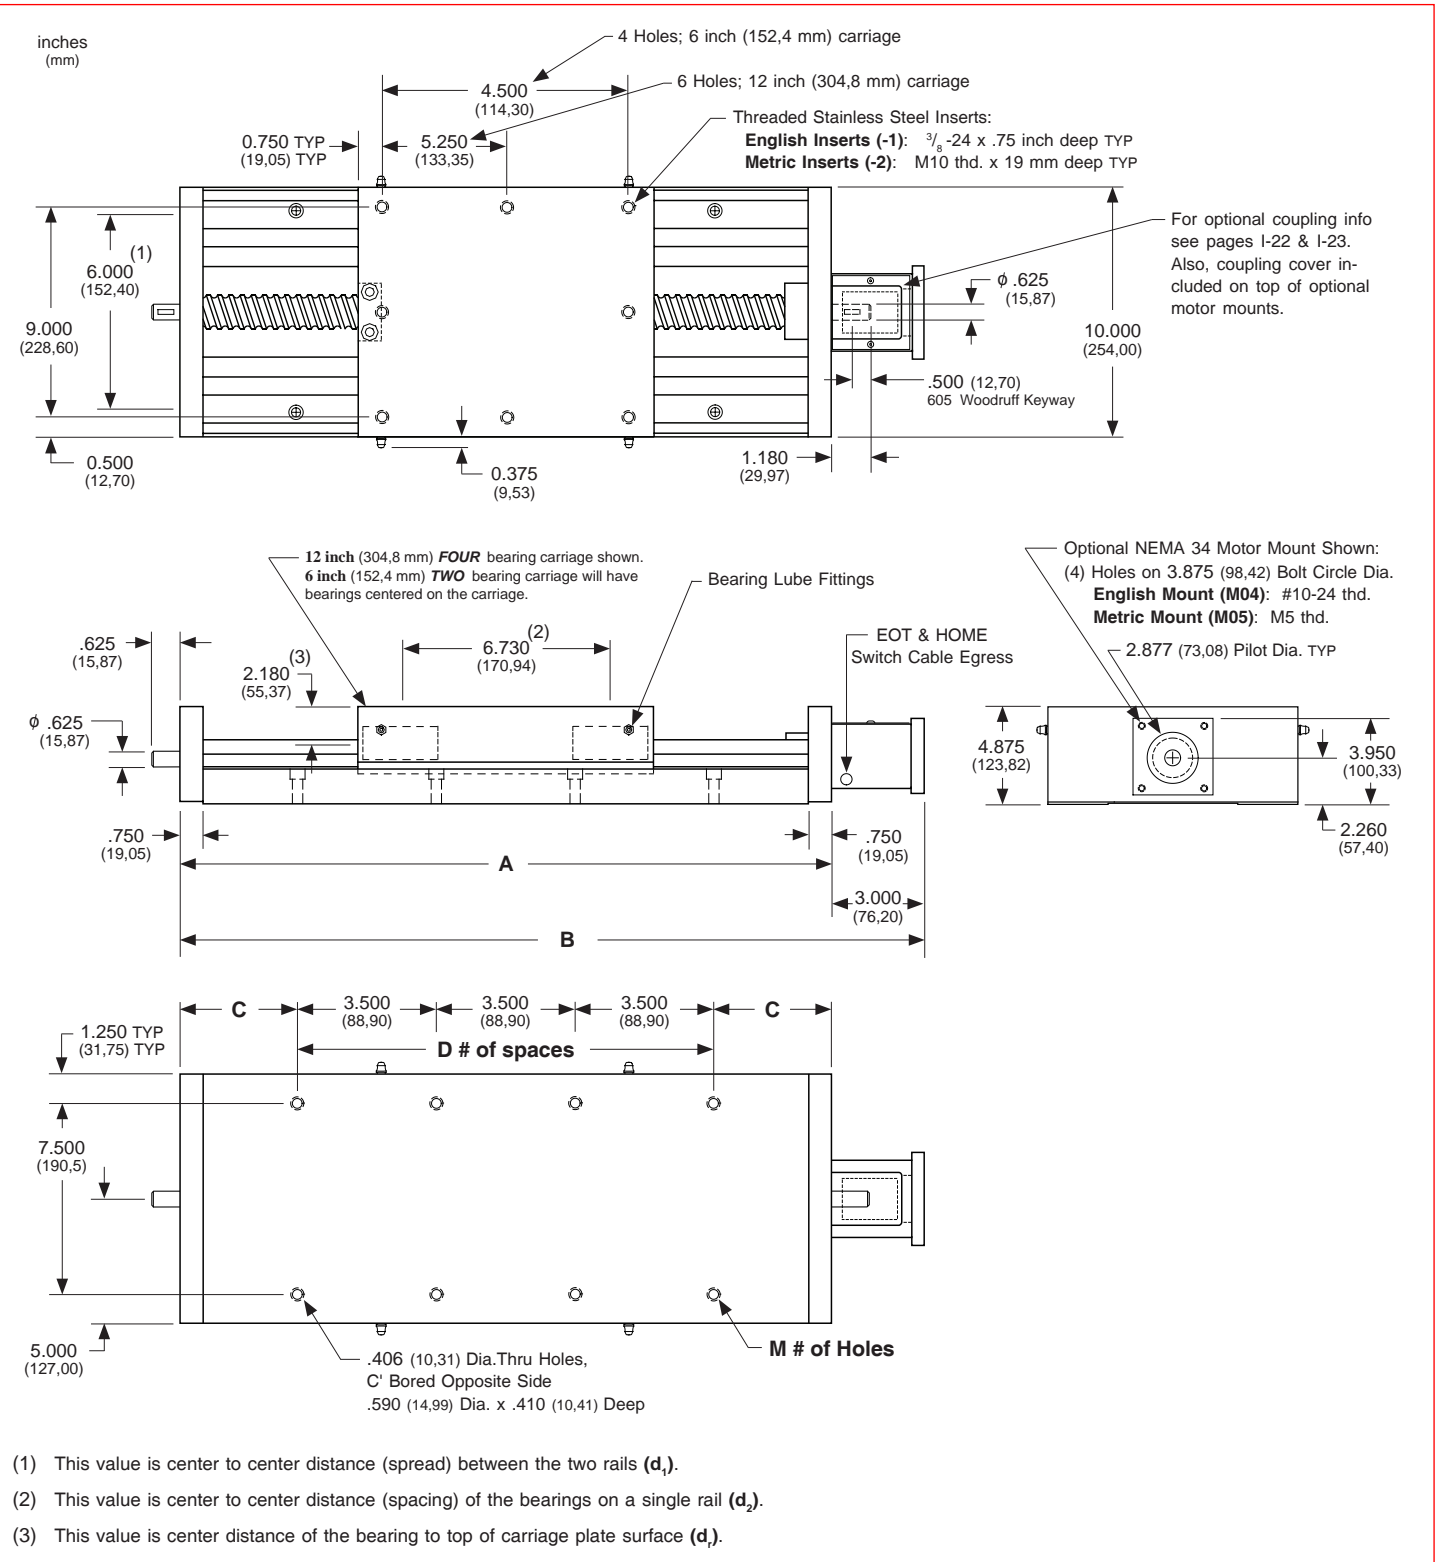

Note: Any 250 series table can be mounted on top of any second 250 series, in order to create X-Y multiple axis configurations. The carriage's threaded stainless steel insert hole pattern DOES NOT exactly match the base mounting hole pattern on each table, therefore machining of the bottom axis carriage plate is required. Contact **LINTECH**.