
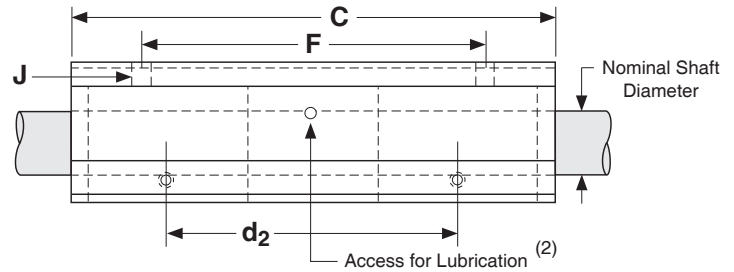


Dimensions & Specifications: **DLBOH** Double Linear Bearing Pillow Block Open (self-aligning)

Model Number	Nominal Shaft Diameter (inches)	Dyn. ⁽¹⁾ Load Capacity (lbs)	Dimensions (inches)													Block Weight (lbs)
			A	B	C	D	E	F	G	H	I	J		K	d ₂ ⁽³⁾	
			+/- .003				+/- .010	+/- .010		min.		hole	bolt			
DLBOH-12	0.750	2,260	0.937	2.75	4.50	1.56	2.375	3.500	0.94	.43	.31	.19	# 8	1.00	2.25	1.00
DLBOH-16	1.000	3,800	1.187	3.25	6.00	2.00	2.875	4.500	1.19	.56	.38	.22	#10	1.25	3.00	2.00
DLBOH-20	1.250	4,700	1.500	4.00	7.50	2.56	3.500	5.500	1.50	.62	.44	.22	#10	1.63	3.75	4.20
DLBOH-24	1.500	7,760	1.750	4.75	9.00	2.94	4.125	6.500	1.75	.75	.50	.28	¼	1.88	4.50	6.70

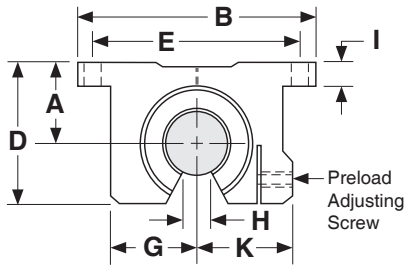

Footnotes:

(1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C).

(2) Sizes 0.750 and above have a 1/4-28 UNF straight thread access for lubrication.

(3) This value is the center to center distance (spacing) of the bearings on a single shaft (d₂).