
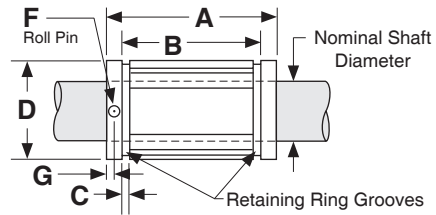


Dimensions & Specifications: **LBOH** High Capacity Linear Bushing (open)

Model Number		Nominal Shaft Diameter (inches)	Dyn. ⁽¹⁾ Load Cap. (lbs)	# of Ball circuits	Working Bore Diameter (inches)	Housing Bore D (inches) ⁽²⁾	Dimensions (inches)				Retention Hole		Bearing Weight (lbs)
							A	B	C	E min.	F dia.	G (in)	
LBOH-12	-S	0.750	1,130	8	0.7500/0.7495	1.2505/1.2500	1.625/1.605	1.285/1.255	0.055	0.44	.14	.13	0.11
LBOH-16	-S	1.000	1,900	8	1.0000/0.9995	1.5630/1.5625	2.250/2.230	1.901/1.871	0.068	0.56	.14	.13	0.23
LBOH-20	-S	1.250	2,350	8	1.2500/1.2494	2.0008/2.0000	2.625/2.600	2.031/1.991	0.068	0.63	.20	.19	0.43
LBOH-24	-S	1.500	3,380	8	1.5000/1.4994	2.3760/2.3750	3.000/2.970	2.442/2.402	0.086	0.75	.20	.19	0.68



Footnotes:

(1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bushing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C).

(2) This specification is based upon the bushing being on the shaft.