



LSRS 12 - PD - 48

Low Profile Steel Rail Support

Shaft Diameter Supported

- 8 - 0.500 inch diameter
- 10 - 0.625 inch diameter
- 12 - 0.750 inch diameter
- 16 - 1.000 inch diameter
- 20 - 1.250 inch diameter
- 24 - 1.500 inch diameter
- 32 - 2.000 inch diameter

Pre-Drilled


- No mounting hole pattern
- PD - pre-drilled hole pattern

Support length

- 48 - 48 inch length

Dimensions & Specifications: LRSR-PD Shaft Support

Model Number		Nominal Shaft Diameter (inches)	Dimensions (inches)							Support Weight (lbs/in)	
Without Holes	With Predrilled Holes		A +/- .002	B	C	G		H	I		
						hole	bolt size				
LSRS8	LSRS8-PD	0.500	0.562	0.37	.341	.169	#6-32	2.00	4.00	.028	
LSRS10	LSRS10-PD	0.625	0.687	0.45	.412	.193	#8-32	2.00	4.00	.041	
LSRS12	LSRS12-PD	0.750	0.750	0.51	.420	.221	#10-32	3.00	6.00	.047	
LSRS16	LSRS16-PD	1.000	1.000	0.69	.560	.281	1/4-20	3.00	6.00	.089	
LSRS20	LSRS20-PD	1.250	1.187	0.78	.626	.343	5/16-18	3.00	6.00	.106	
LSRS24	LSRS24-PD	1.500	1.375	0.93	.703	.406	3/8-16	4.00	8.00	.140	
LSRS32	LSRS32-PD	2.000	1.750	1.18	.845	.531	1/2-13	4.00	8.00	.230	

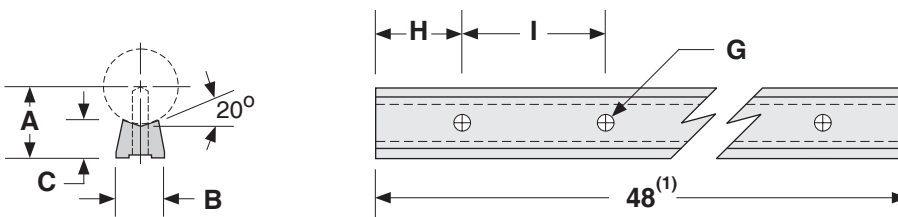

Material: AISI C-1018 steel
Finish: natural finish

Shorter lengths available. Contact the factory.