

Screw & Nut Specifications

Model Number	Nut Type	Diameter inches (mm)	Lead inches (mm)	Root Diameter inches (mm)	Ball Diameter inches (mm)	Number of Circuits	Static Load lbs (kgf)	Dynamic Load ⁽¹⁾ lbs (kgf)
RS075020 0.750 inch dia. 0.200 inch lead	<i>Non-preloaded</i> Ball (N1/N2)	0.750 (19,05)	0.200 (5,08)	0.655 (16,63)	0.125 (3,17)	2	18,800 (8527)	1,900 (862)
	<i>Preloaded</i> Ball (N3/N4)						18,610 (8441)	1,710 (776)
	<i>Non-preloaded</i> Turcite (N5/N6)				n/a	n/a	1,500 (680)	195 (88)
	<i>Preloaded</i> Turcite (N7/N8)						1,500 (680)	175 (79)
RS075050 0.750 inch dia. 0.500 inch lead	<i>Non-preloaded</i> Ball (N1/N2)	0.750 (19,05)	0.500 (12,70)	0.629 (15,97)	0.156 (3,96)	2	24,200 (10977)	3,450 (1565)
	<i>Preloaded</i> Ball (N3/N4)						23,855 (10820)	3,105 (1408)
	<i>Non-preloaded</i> Turcite (N5/N6)				n/a	n/a	1,500 (680)	195 (88)
	<i>Preloaded</i> Turcite (N7/N8)						1,500 (680)	175 (79)

Other Specifications

Maximum Acceleration Rate	Ball nut: 772 inches/sec ² (19.6 m/sec ²) Turcite nut: 193 inches/sec ² (4.9 m/sec ²)
Maximum Speed	Ball nut: 3000 rpm Turcite nut: 1500 rpm
Screw Material Screw Extensions	Right Hand Thread, Case Hardened Rc 58 Steel Rolled Ball Screw Woodruff Keyways on Support Housings - 404 Drive End; 303 Opposite End
Screw Maximum Length ⁽²⁾ Screw Weight	72 inches (1828 mm) 1.42 lbs/ft (21,1 g/cm)
Support Housings	Aluminum with Black Anodized Finish or Steel with Black Oxide Finish 45° Chamfer x .02 inch (0,50) all Straight Edges Base or Face Mount with Integral Seals
Nut Flanges	Steel with Black Oxide Finish English or Metric Load Mounting Interface

Footnotes:

- (1) Load based upon 1 million inches (25 Km) of travel life. See page 43 for further travel life ratings.
(2) Maximum stock length (not the maximum thread length with bearing housings). See page 42 for maximum thread lengths for each configuration.

Screw Specifications



Model Number	Nut Type	Screw Efficiency %	Lead Error inch/ft (mm/300 mm)	Backlash inches (mm)	Unidirectional Repeatability inches (mm)	Bidirectional Repeatability inches (mm)
RS075020 0.750 inch dia. 0.200 inch lead & RS075050 0.750 inch dia. 0.500 inch lead	<i>Non-preloaded</i> Ball (N1/N2)	90	< 0.003 (0,075)	< 0.008 (0,203) 0	+/- 0.0002 (0,0050)	+ 0.0002 (0,0050) to - 0.0082 (0,2082)
	<i>Preloaded</i> Ball (N3/N4)					+ 0.0002 (0,0050) to - 0.0002 (0,0050)
	<i>Non-preloaded</i> Turcite (N5/N6)	60	< 0.003 (0,075)	< 0.008 (0,203) 0	+/- 0.0002 (0,0050)	+ 0.0002 (0,0050) to - 0.0082 (0,2082)
	<i>Preloaded</i> Turcite (N7/N8)					+ 0.0002 (0,0050) to - 0.0002 (0,0050)

Assembly Specifications

Model Number	Nut Type	Breakaway Torque oz-in (N-m)				
		Simple-Simple	Fixed(LT)-Simple	Fixed(HT)-Simple	Rigid-Simple	Rigid-Rigid
RS075020 0.750 inch dia. 0.200 inch lead	<i>Non-preloaded</i> Ball (N1/N2)	< 10 (0,07)	< 20 (0,14)	< 30 (0,21)	< 30 (0,21)	< 45 (0,32)
	<i>Preloaded</i> Ball (N3/N4)	< 20 (0,14)	< 30 (0,21)	< 40 (0,28)	< 40 (0,28)	< 55 (0,39)
	<i>Non-preloaded</i> Turcite (N5/N6)	< 15 (0,11)	< 25 (0,18)	< 35 (0,25)	< 35 (0,25)	< 50 (0,35)
	<i>Preloaded</i> Turcite (N7/N8)	< 30 (0,21)	< 40 (0,28)	< 50 (0,35)	< 50 (0,35)	< 65 (0,45)
RS075050 0.750 inch dia. 0.500 inch lead	<i>Non-preloaded</i> Ball (N1/N2)	< 15 (0,11)	< 25 (0,18)	< 35 (0,25)	< 35 (0,25)	< 50 (0,35)
	<i>Preloaded</i> Ball (N3/N4)	< 30 (0,21)	< 40 (0,28)	< 50 (0,35)	< 50 (0,35)	< 65 (0,45)
	<i>Non-preloaded</i> Turcite (N5/N6)	< 25 (0,18)	< 35 (0,25)	< 45 (0,32)	< 45 (0,32)	< 60 (0,42)
	<i>Preloaded</i> Turcite (N7/N8)	< 50 (0,35)	< 60 (0,42)	< 70 (0,49)	< 70 (0,49)	< 85 (0,60)


Support Housing Specifications

Support Housing Life millions of screw revolutions	Support Housing Thrust Load Capacity - (Axial)			
	Simple	Fixed (LT)	Fixed (HT)	Rigid
Static	1,675 (760)	2,110 (957)	3,350 (1520)	3,350 (1520)
1	1,675 (760)	2,110 (957)	3,035 (1377)	3,035 (1377)
2	1,365 (619)	1,720 (780)	2,275 (1032)	2,275 (1032)
10	795 (361)	1,050 (476)	1,375 (624)	1,375 (624)
50	465 (211)	585 (265)	820 (372)	820 (372)
100	370 (168)	465 (211)	650 (295)	650 (295)
500	215 (98)	270 (122)	390 (177)	390 (177)

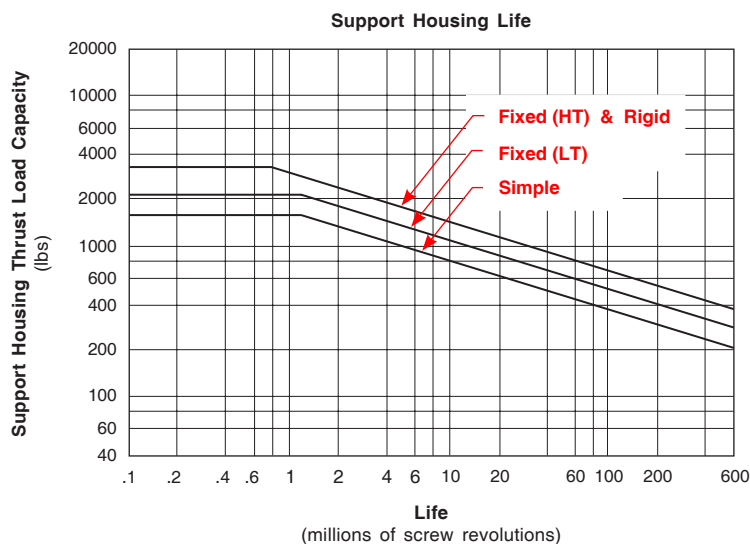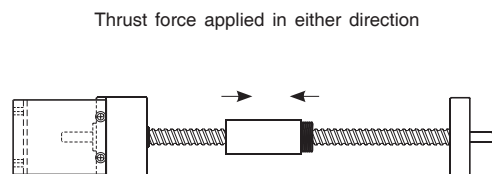


Note: Multiply screw revolutions by the screw lead in order to convert to inches (or mm) traveled by the nut.

Available Configurations

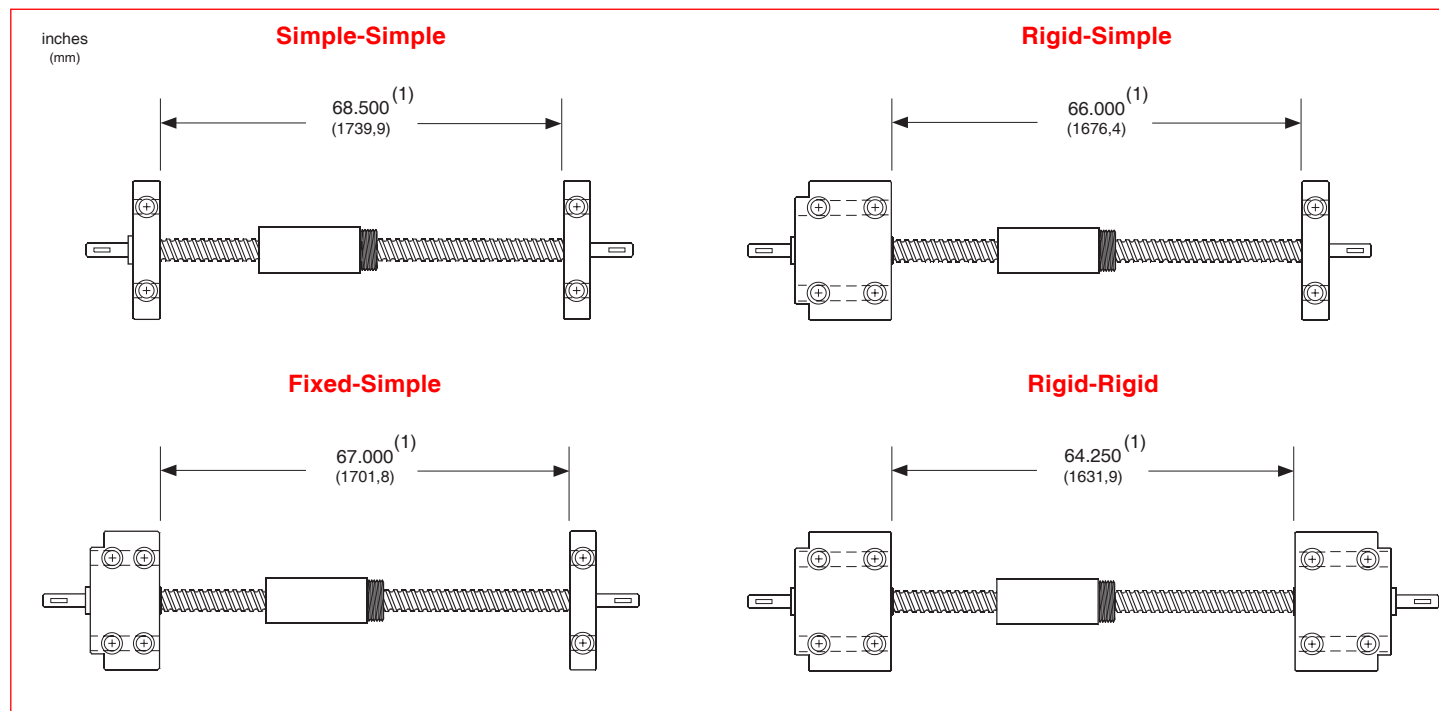

Overall Length Diagram

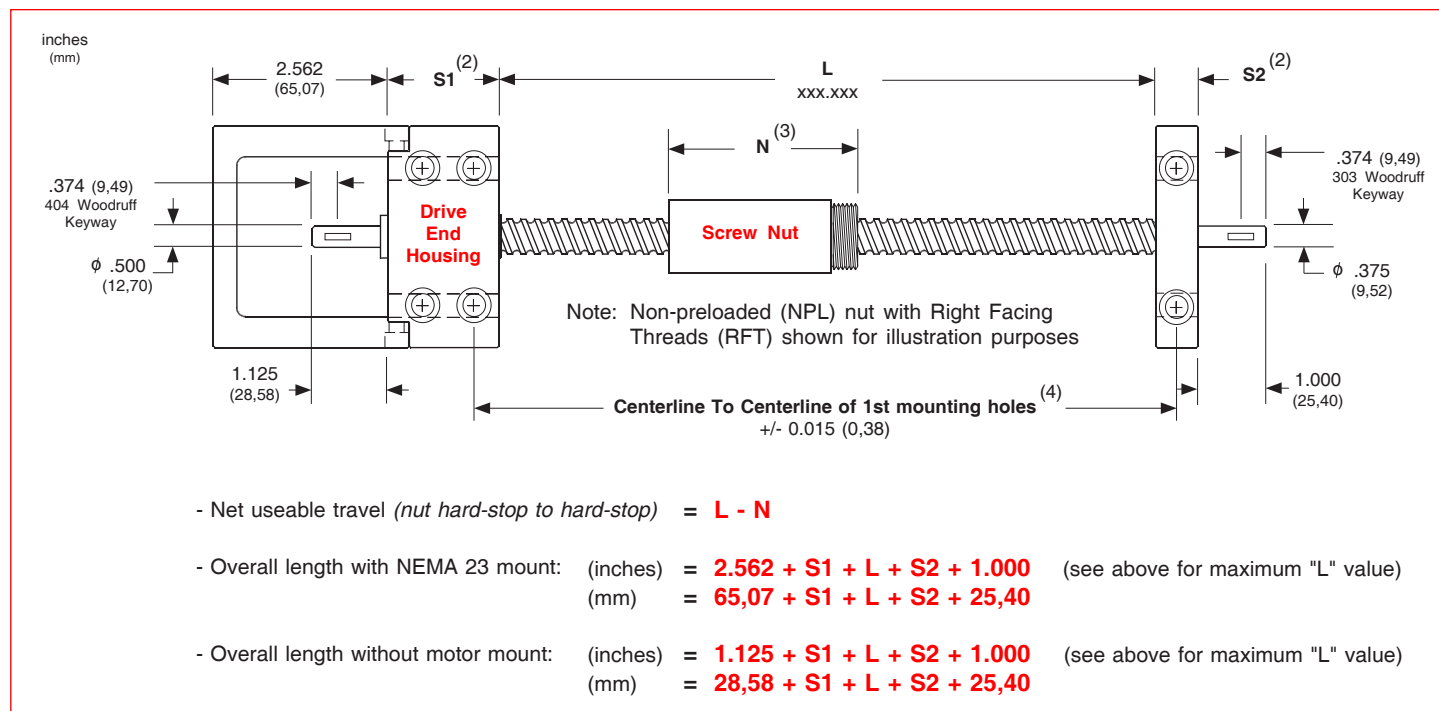


Footnotes:


- (1) Maximum available standard screw thread length for the bearing support housing configuration shown.
- (2) Fixed-simple support configuration shown for reference. See page 45 for length values for simple, fixed, and rigid housings.
- (3) See page 44 for available nut styles. Refer to A1 & A2 values for the nut length. See page 96 for wiper kit lengths.
- (4) Tolerance shown is for base mounted support housings. Tolerance also applies to face mounted support housings.

Performance Charts


Simple-Simple

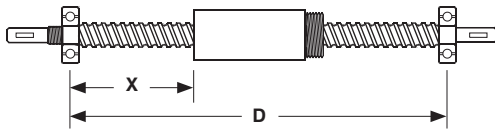

Rigid-Simple

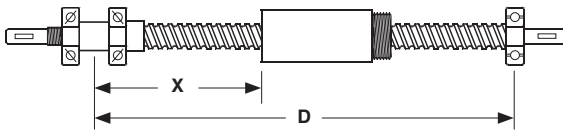


Rigid-Rigid

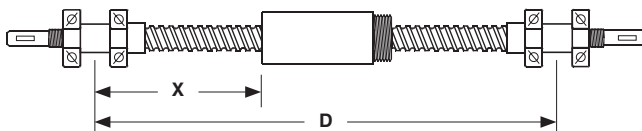

Maximum Compression Load ⁽¹⁾


X inches (mm)	simple-simple		rigid-simple		rigid-rigid	
	lbs	(kgf)	lbs	(kgf)	lbs	(kgf)
20 (508)	4398	(1995)	8796	(3990)	17598	(7982)
40 (1016)	1100	(499)	2200	(998)	4400	(1996)
60 (1524)	489	(222)	978	(444)	1956	(887)

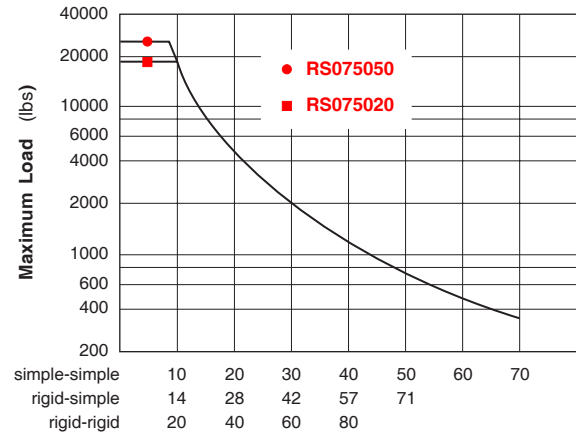

Maximum "X" distance between bearing support and Load (inches)

Maximum Speed ⁽¹⁾


D inches (mm)	simple-simple		rigid-simple		rigid-rigid	
	rpm	rpm	rpm	rpm	rpm	rpm
29 (737)	3000	3000	3000	3000	3000	3000
40 (1016)	1640	2410	2410	3000	3000	3000
60 (1524)	725	1070	1070	1625	1625	1625
70 (1778)	535	785	785	1195	1195	1195

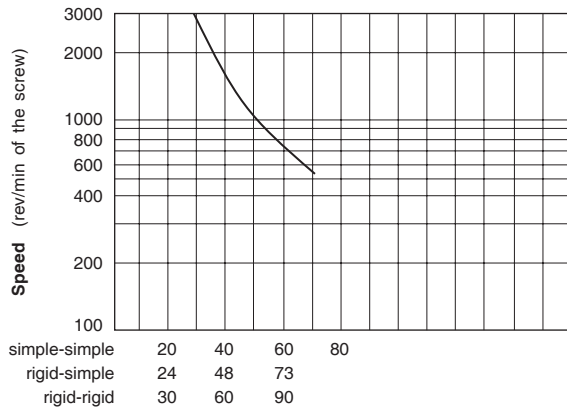

Maximum "D" distance between bearing supports (inches)

Screw Travel Life ⁽²⁾


Life millions of inches (km)	075020		075050		Turcite Nut	
	lbs	(kgf)	lbs	(kgf)	lbs	(kgf)
1 (25)	1900	(862)	3450	(1565)	195	(88)
2 (50)	1540	(698)	2790	(1265)	160	(72)
50 (1270)	540	(245)	990	(450)	55	(29)
100 (2540)	460	(208)	820	(372)	45	(20)

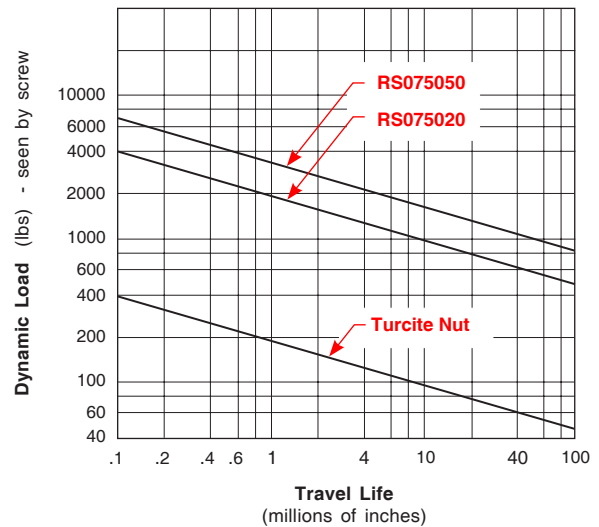


Footnotes:

- (1) Refer to the simple-simple support lengths for fixed-simple configurations. A fixed housing performs like a simple housing for critical speed and compression load specifications. Maximum speeds may not be reached using a Turcite nut due to system friction.
- (2) Multiply life value from chart (or graph) by 0.90 to obtain the life for a preloaded ball nut.

Nut Dimensions

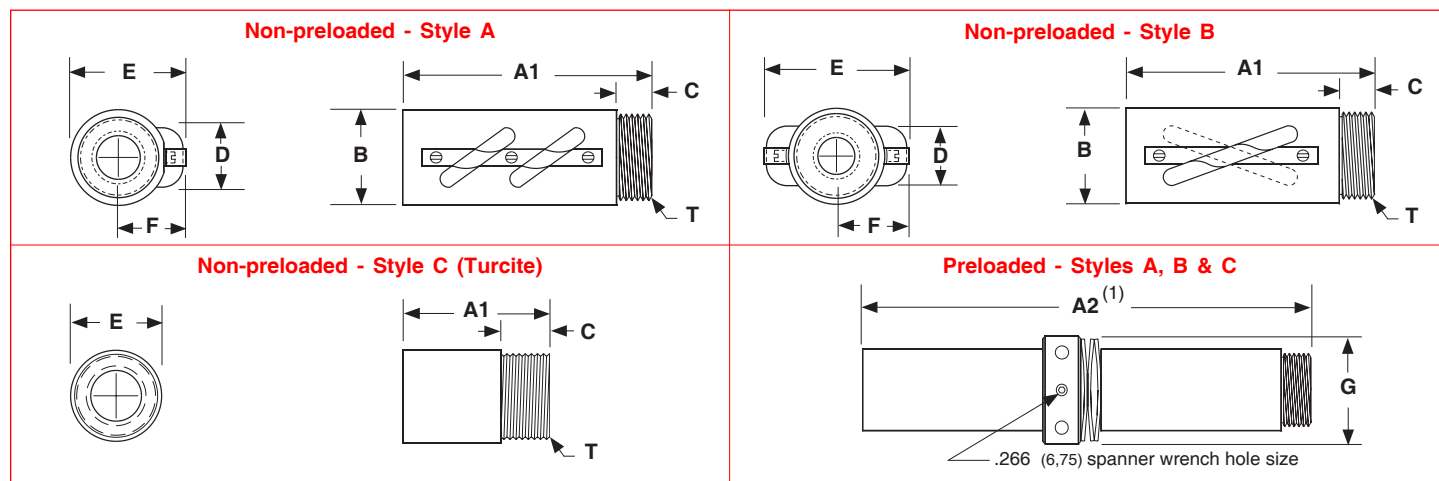

Nut Flange Dimensions

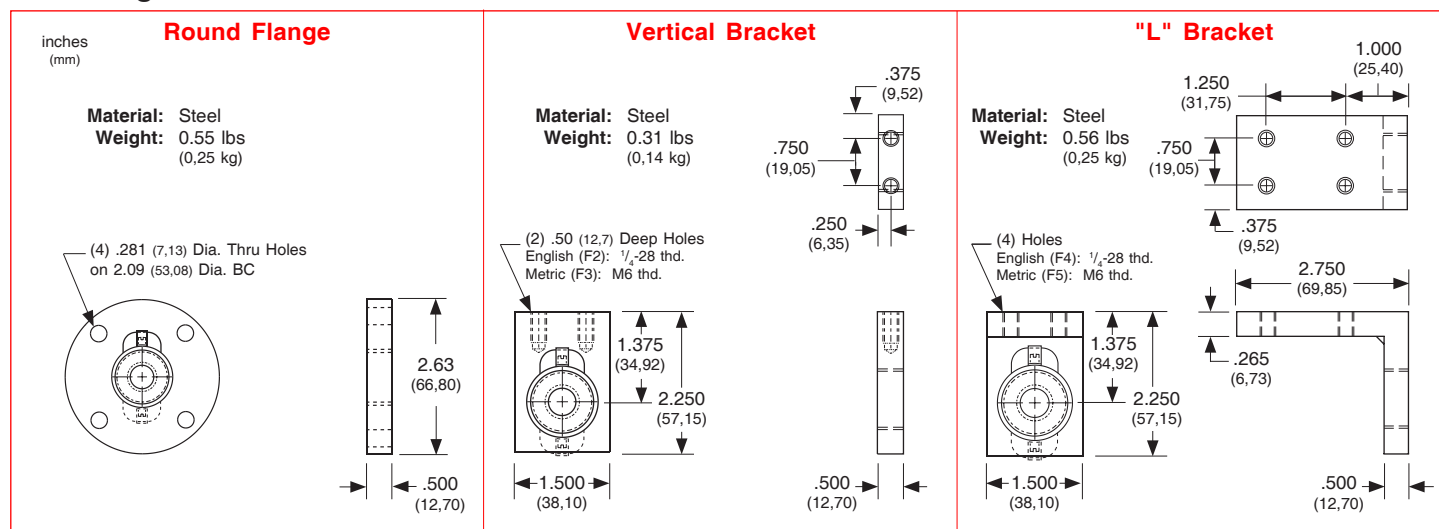

Model Number	Nut Style	Nut Dimensions inches (mm)									Nut Weight ⁽³⁾ lbs (kg)
		A1	A2 ⁽¹⁾	B	C	D	E	F	T - "V" Threads ⁽²⁾	G	
RS075020	A	2.890 (73,40)	6.080 (154,43)	1.317 (33,45)	0.505 (12,82)	0.917 (23,29)	1.521 (38,63)	0.940 (23,87)	1.173 - 18 UNS-2A (29,79 - 18 UNS-2A)	1.670 (42,41)	1.00 (0,45)
RS075050	B	2.940 (74,67)	6.180 (156,97)	1.317 (33,45)	0.505 (12,82)	0.983 (24,96)	1.984 (50,39)	1.060 (26,92)	1 1/4 - 16 UN-2A (31,75 - 16 UN-2A)	1.670 (42,41)	1.00 (0,45)
RS075020	C	1.510 (38,35)	3.520 (89,41)	n/a	0.505 (12,82)	n/a	1.500 (38,10)	n/a	1.173 - 18 UNS-2A (29,79 - 18 UNS-2A)	n/a	0.35 (0,15)
RS075050	C	1.510 (38,35)	3.520 (89,41)	n/a	0.505 (12,82)	n/a	1.500 (38,10)	n/a	1 1/4 - 16 UN-2A (31,75 - 16 UN-2A)	n/a	0.35 (0,15)

Footnotes:

- (1) This is the length for a preloaded nut. Preloaded nut consists of two (2) non-preloaded nuts with a locking spanner nut, and belville springs.
- (2) All flange threads are internal (Type 2B) to match the external nut threads.
- (3) Weight of the non-preloaded nut. Multiply value by 2.1 to obtain the weight for the preloaded nut assembly.

Support Housing Dimensions

