


LINTECH[®]

Round Rail Components



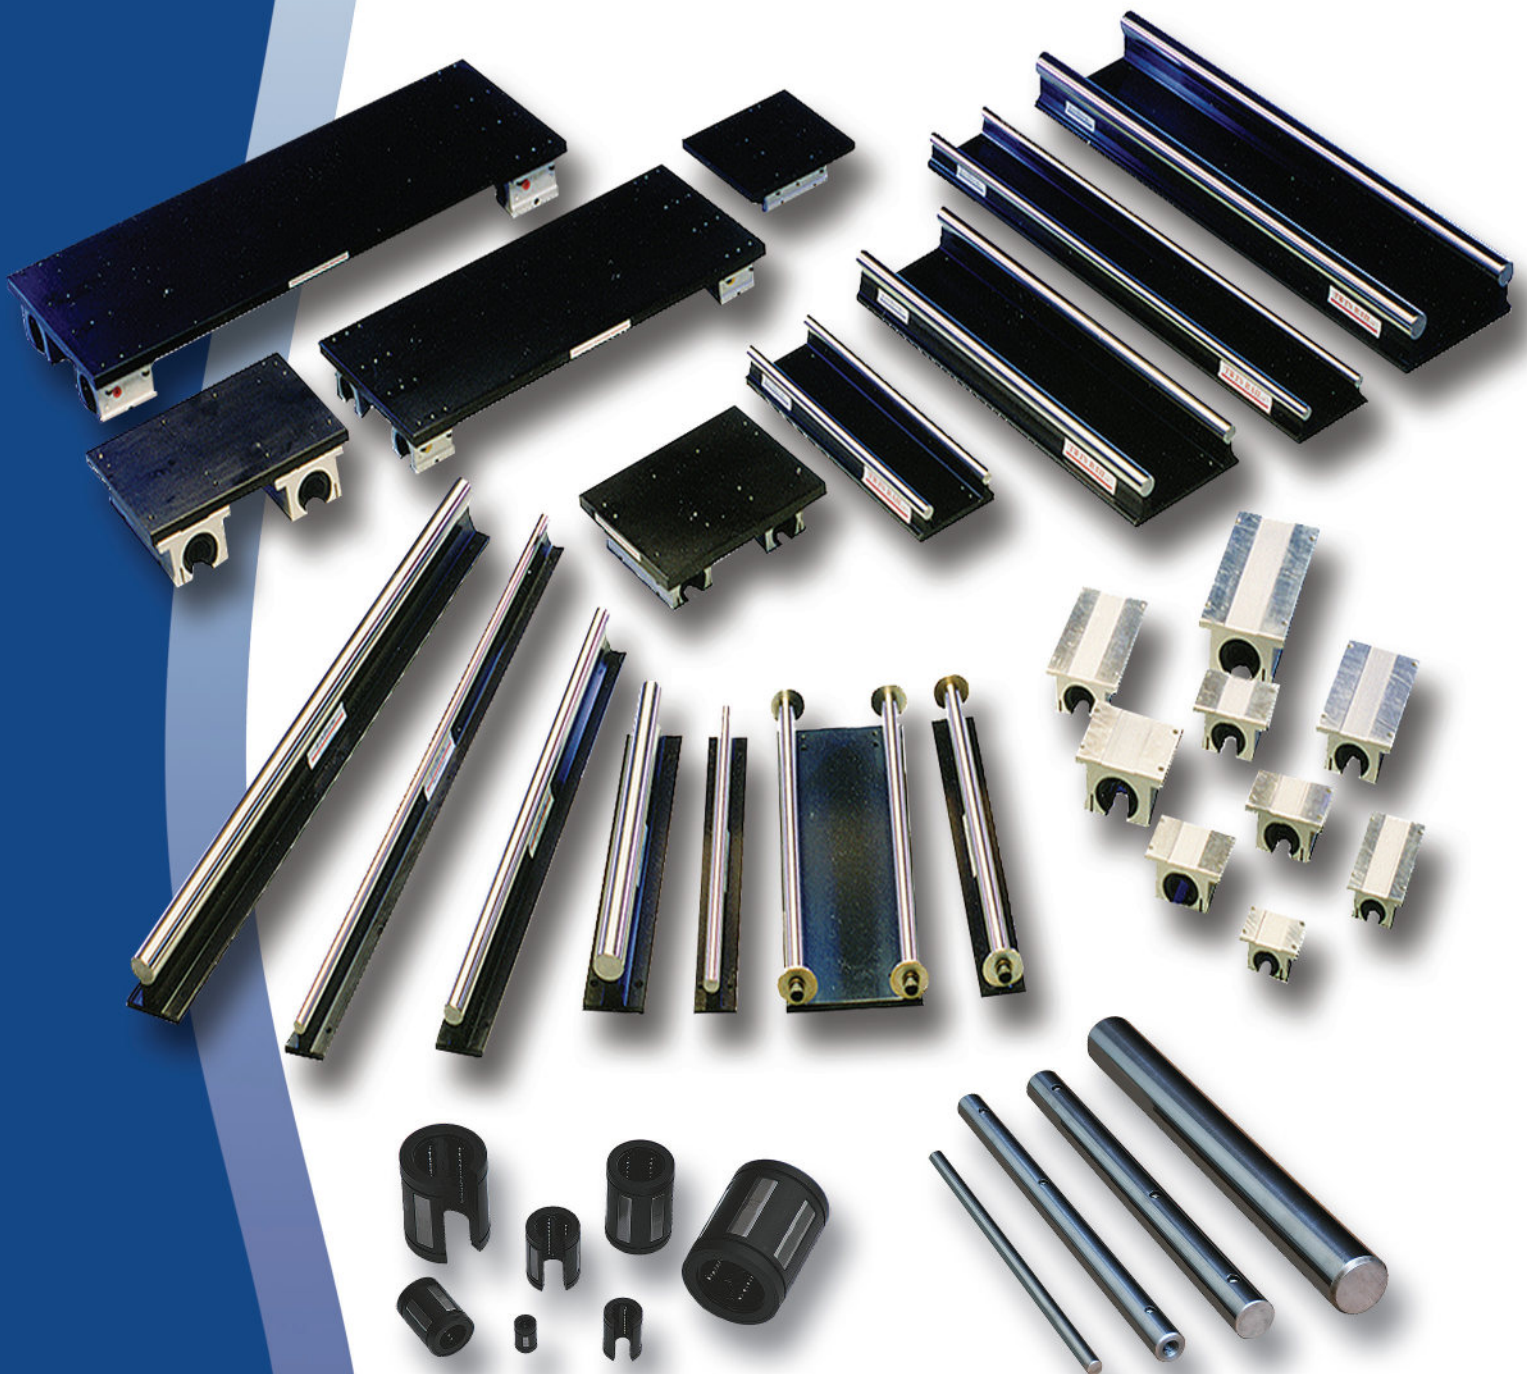

For over 49 years *LINTECH* has designed, engineered, and manufactured linear positioning components for use in a wide range of applications. Whether it is a standard positioning component or a custom positioning assembly, *LINTECH* takes great pride in manufacturing a quality product.

At *LINTECH* we are proud to provide the motion control user with this product guide. It was developed to assist you with the design, selection, and implementation of mechanical positioning components.

Depending on the requirements, standard positioning components, or systems, can often be assembled and shipped in less than 2 weeks. Custom positioning assemblies require a different approach. We evaluate your special application, use our many years of experience to guide you, and then manufacture a quality product designed to meet your performance specifications.

LINTECH's technical support consists of a well trained inside customer service department, an experienced application engineering staff, and a versatile machining facility.

Our local technical support group consists of Automation Specialists located throughout the World. These Automation Specialists are experienced in the use of electronic and mechanical motion control products. They are well trained on the performance capabilities of *LINTECH* positioning components.

LINTECH is constantly designing new products and improving upon the many options available with our standard products. Whether it is a standard or custom positioning system required, visit our website, call, or e-mail us. We look forward to hearing from you.

Visit our website, or call us for the location of the nearest Automation Specialist in your area:

LINTECH®

1845 Enterprise Way
Monrovia, CA. 91016

Toll Free: (800) 435 - 7494

Phone: (626) 358 - 0110

Fax: (626) 303 - 2035

Web Site: www.LintechMotion.com

E-Mail: Lintech@LintechMotion.com



version: 05/2020

Table of Contents

	Pages
Design Considerations	2 to 18
Linear Bearings, Pillow Blocks and Carriage Assemblies	19 to 40
Precision Shafting, Shaft Supports and Shaft Assemblies	41 to 69
Terms of Sale	Inside Back Cover

Precision Shafting

LINTECH's precision "cut to length" 1060 carbon steel inch precision shafting is manufactured with the highest standards for surface finish, surface hardening, roundness and straightness. These manufacturing procedures provide a quality shaft with long life and optimum performance in today's demanding applications. Inch diameters are available from 0.25 to 2.0 inches in class L, S and N diameter tolerances. Metric diameters are available from 8 to 50 mm. Any length is available within .001 inch increments, up to the standard maximum stocked length.



ES End Shaft Support Blocks

LINTECH's aluminum and steel end support housings (ES series) provide a simple means to fix the ends of a shaft to a mounting surface. The ES-S series is manufactured from 1045 steel, while the ES-A series is manufactured from 6061-T6 aluminum.



ARS & LSRS Shaft Supports

LINTECH's aluminum and steel shaft supports provide a simple means to fix a shaft to a user mounting surface in an application that requires the shaft to be fully supported over its entire length. The ARS series is manufactured from 6061-T6 aluminum, while the low profile LSRS series is manufactured from C-1018 steel.



SA Shaft Assemblies

LINTECH's single Shaft Assembly (SA series) is a complete assembly which simplifies the use of a linear bearing in a mechanical positioning application. Each assembly has a steel shaft mounted to a black anodized, precision machined, aluminum support. The pre-drilled base mounting holes in the 6, 12, 18, and 24 inch supports allow for easy customer mounting. The SA assemblies come in standard lengths from 6 to 192 inches, and with shaft diameters from 0.50 to 2.00 inches.



TRSA Shaft Assemblies

LINTECH's *TWIN RAIL®* Shaft Assembly (TRSA series) is a complete assembly which simplifies the use of a linear bearing in a mechanical positioning application. Two steel shafts are mounted and aligned on the common base, therefore eliminating the alignment process required for two separate shafts. The pre-drilled base mounting holes in the support allow for easy customer mounting. Each 6, 12, 18, and 24 inch aluminum support has two threaded holes at one end to assist in leveling the assembly. The TRSA comes in standard lengths from 6 to 192 inches, and with shaft diameters from 0.50 to 2.00 inches.



LBCA & LBOA Precision Linear Bushings

LINTECH's LBCA & LBOA offer an "all steel" linear bearing design. This provides for operation in high temperature environments (up to + 600° F) and can offer a smoother operation when compared to the LBC & LBO style bearings for some applications.




LBC, LBO, LBCH, LBOH & Metric Linear Bushings

LINTECH's high capacity linear bearings have a ball conforming outer race coupled with a self-aligning feature which allows for zero bearing clearance while maintaining smooth operation. The independently self-aligning outer bearing races insure smooth operation by allowing misalignment up to 1/2 degree in all directions. These linear bearings are available in "open" or "closed" styles. The closed style is available in 0.25 to 2.00 inch nominal diameters, while the open style is available in 0.50 to 2.00 inch nominal diameters. Metric style diameters are available from 8 mm to 50 mm.



SLBO, SLBC, DLBC & DLBO Pillow Blocks

LINTECH's SLBC and SLBO series have one linear bearing and two wiper seals per pillow block, and are self-aligning in all directions. The SLBO and DLBO series have a screw for pre-load adjustment to reduce the shaft and bearing clearance. **LINTECH's** DLBC and DLBO series have two linear bearings in one aluminum pillow block, separated by a wick that serves as an oil reservoir. Each pillow block housing provides a flat top surface for load mounting and alignment.

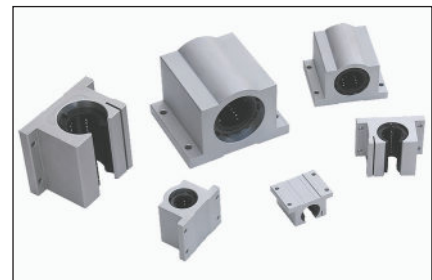

TRCA Carriage Assemblies

LINTECH's TRCA series, *TWIN RAIL[®]* carriage assemblies are pre-engineered assemblies which have either SLBO or DLBO pillow blocks mounted to a 6061-T6 aluminum, black anodized machined plate. The pillow blocks are pre-aligned and doweled to the carriage plate to match **LINTECH's** TRSA series shaft assemblies. The use of a TRCA carriage assembly and a TRSA shaft assembly reduces the process of mounting and aligning two shafts and pillow blocks. Each carriage surface is machined which allows for accurate mounting of customer loads, and are available with mounting holes with stainless steel inserts. Carriage assemblies are provided with pillow blocks for shaft diameters from 0.50 to 2.00 inches, and come in lengths from 6 to 30 inches.



Options

LINTECH can provide many options which allow the user to customize a product for their application requirements. These include: metric shaft assemblies, tubular shafting, bearing locks, metric linear bearings, special finishes, custom *TWIN RAIL[®]* assembly widths and lengths, etc.. Contact the factory if a desired option is not shown in this catalog.

Precision Steel Shafts

LINTECH's precision shafting, SA and TRSA shaft assemblies use Rockwell 60-65C hardened and ground shafts. These high quality carbon steel shafts are accurately machined and heat treated for uniform hardness. They are also inspected for straightness, roundness, and smoothness. The high hardness and extremely smooth surface of the steel shafts creates an abrasion-resistant surface, which reduces material wear and system friction, while maintaining an optimal surface finish. Inch and Metric shaft diameters are available in different shaft tolerances.

Stainless Steel Shafts

For corrosion resistant applications, **LINTECH** provides 440C stainless steel shafts with the same shaft diameter tolerance, hardness depth, and straightness as our standard steel shafts. Stainless steel shafts are typically used in the chemical and food processing industries, for medical equipment in corrosive environments, or in strong oxidizing atmospheres where no lubricating oil is available.

Chrome Plated Shafts


LINTECH can also provide chrome plated precision shafting for those demanding applications that required a high level of corrosion resistance.

Shaft Diameter Tolerance

LINTECH shafts are precision ground to a very close diameter tolerance. This diameter tolerance is an extremely important factor when using **LINTECH** linear bearings. It assures a dependable fit, with proper clearance between a shaft and linear bearing.

Shaft Hardness

The hardness of a steel shaft is its ability to prevent nicks, indentations, or grooving. It is an important factor in determining the life of a linear bearing system in an application. The heat treatment process performed on all shafts assures uniform hardness in radial and axial directions.

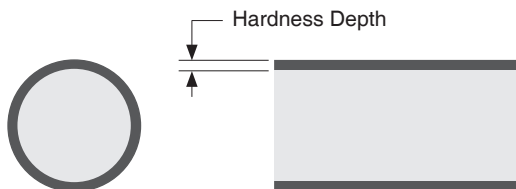

Shaft Straightness


The exceptional straightness of all shafts eliminate system binding when using a TRSA shaft assembly with a TRCA carriage assembly, and helps the alignment process when using two precision shafts, or SA shaft assemblies, in a parallel assembly application.

Shaft Supports

LINTECH ES end supports use 6061-T6 aluminum (-A), or 1045 steel (-S). These supports slide over the hardened shaft, and have a screw that is adjusted to clamp the support onto the shaft. The ARS series assembly support is manufactured from aluminum, while the low profile LSRS series is manufactured from C-1018 steel and functions the same as the ARS series, but has a smaller overall height.


ES-A Series

ES-S Series

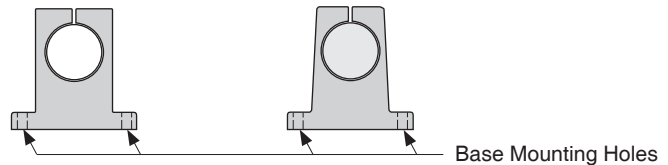

ARS Series


LSRS Series

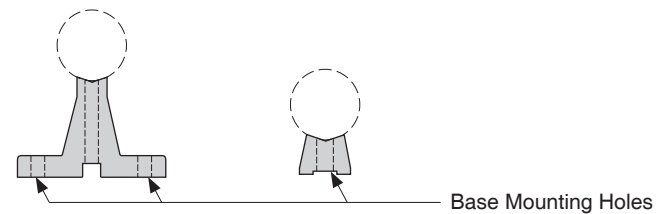


Shaft Assemblies

LINTECH shaft assemblies (SA and TRSA series) use 6061-T6 precision machined aluminum supports. These black anodized supports have pre-drilled base mounting holes that come in both single supports for the SA, and **TWIN RAIL**® supports for the TRSA. These precision machined supports come in 6, 12, 18, and 24 inch lengths, and can be combined for nearly unlimited assembly lengths.

SA Series - single rail supported assembly

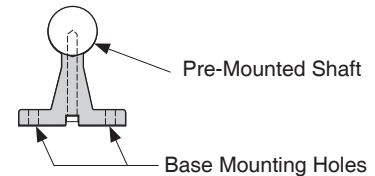


TRSA Series - **TWIN RAIL**® supported assembly

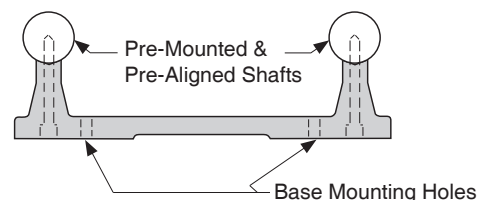





Precision Steel Linear Bushings

LINTECH's LBCA and LBOA precision steel linear bushings are manufactured with high quality steel that is hardened and precision ground. The recirculating precision ground bearing balls roll freely into and out of the load zone. The balls are guided through their recirculation path by a steel retainer and hardened sleeve. These bearings are used in high temperature applications and where self alignment is not required.

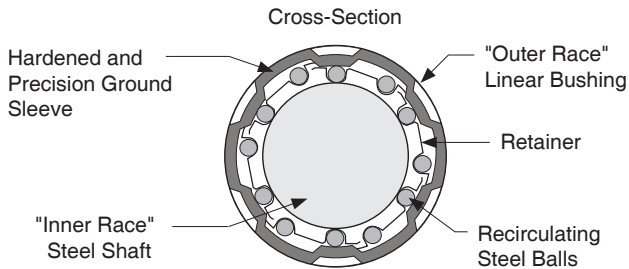




Self-Aligning Linear Bushings

LINTECH's LBC, LBO and Metric style linear bushings consist of a wear resistant, low friction, smooth, resilient, plastic ball retainer and plastic outer sleeve. The load carrying components of the linear bearing are precision machined, hardened steel bearing plates, and recirculating steel balls. There are longitudinal grooves along the inner surface of the steel bearing plates which contact the recirculating steel balls. The steel bearing plate is also designed slightly thicker in the middle than at either end. This tapered thickness along the bearing plate length allows the bearing plate to automatically align itself with the "inner race" steel shaft. This assures smooth entry and exit of the recirculating steel balls in and out of the load area, along with a more uniform load distribution within the linear bearing.

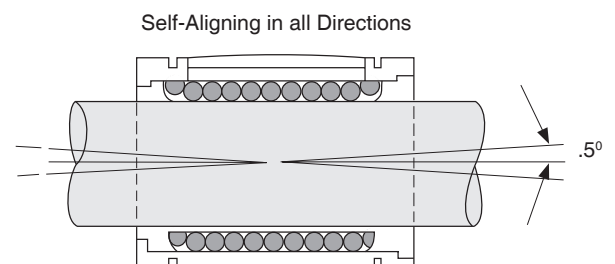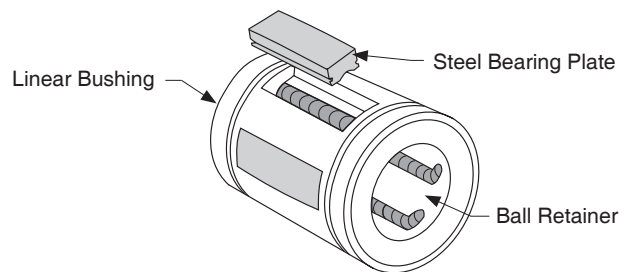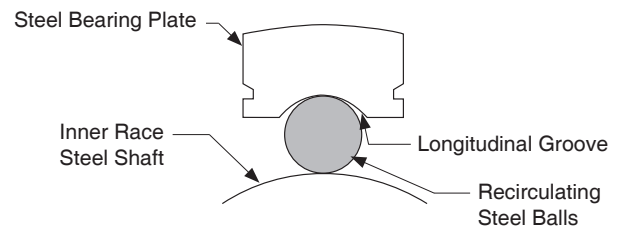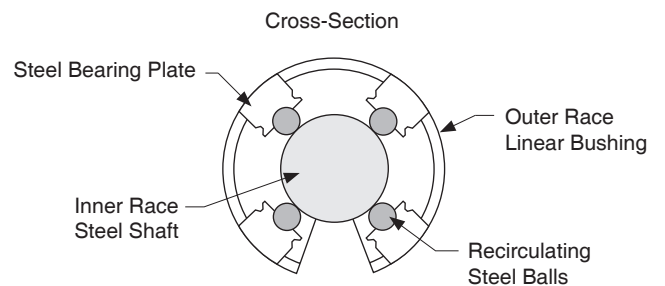


Self-Aligning High Capacity Linear Bushings

LINTECH's LBCH, LBOH linear bushings consists of a wear resistant, low friction, smooth, resilient, plastic ball retainer and plastic outer sleeve. The load carrying components of the linear bearing are precision machined, hardened steel bearing plates, and recirculating steel balls. There are longitudinal grooves along the inner surface of the steel bearing plates which contact the recirculating steel balls. The steel bearing plate is also designed slightly thicker in the middle than at either end. This tapered thickness along the bearing plate length allows the bearing plate to automatically align itself with the "inner race" steel shaft. This assures smooth entry and exit of the recirculating steel balls in and out of the load area, along with a more uniform load distribution within the linear bearing.

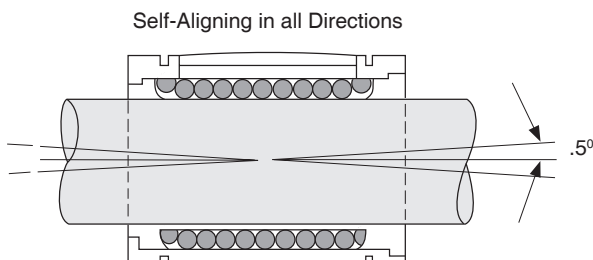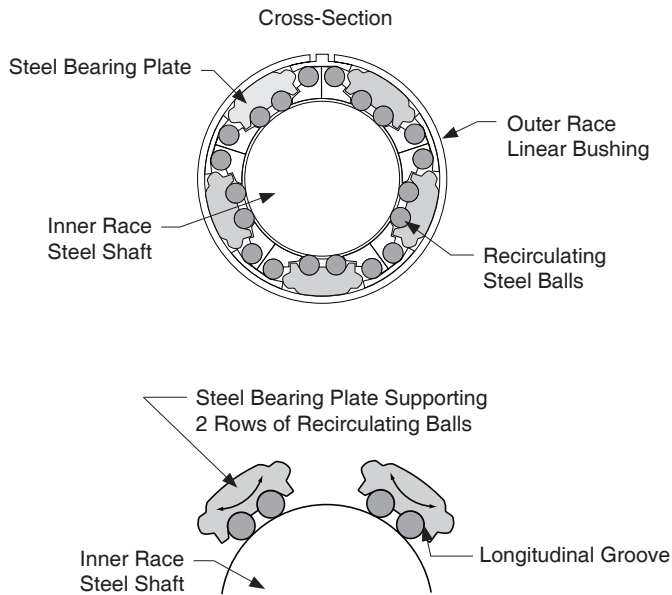

Pillow Blocks

LINTECH's SLBC, SLBO, DLBC and DLBO series pillow blocks use one or two, LBC or LBO, linear bearings with integral seals to obtain their long life, and high load capacity. The precision machined 6061-T6 aluminum pillow block mounting surface allows for accurate and easy mounting to a common carriage plate. The SLBO and DLBO pillow block models have an adjusting screw to permit adjustment of radial play between the "inner race" steel shaft and the "outer race" linear bearing. A retention pin is used to secure the linear bushing within the aluminum housing.

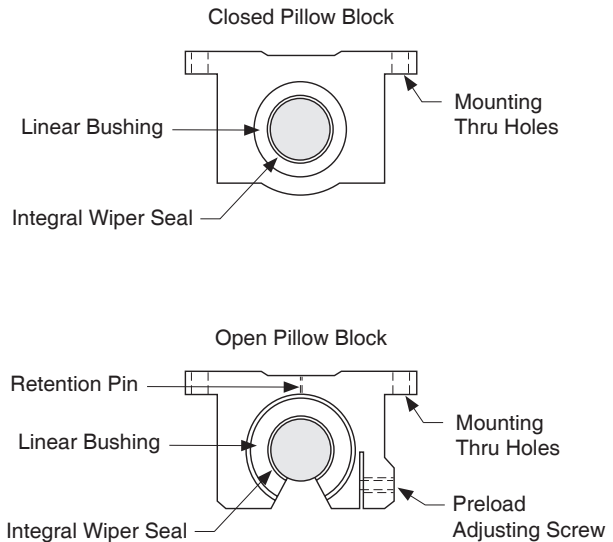

Lubrication

LINTECH shafts, shaft assemblies, linear bearings, pillow blocks or carriage assemblies require a small amount of grease or oil for proper, long term operation. Lubrication will decrease system wear and the potential for rusting of shafts and linear bearing surfaces. For most applications a medium to heavy oil, light grease, or silicone based lubricant is recommended. The many built-in pockets within the linear bearing allows the adhesive properties of these lubricants to be stored for extended periods of time while minimizing sealing problems.

To obtain the estimated travel life for a given application, the linear bearings, pillow blocks or carriage assemblies should not run dry for an extended period of time. This lubrication schedule will ultimately need to be determined empirically during operation at the installation site since it can vary depending upon the environment, operation conditions, quantity and type of lube used, and other unforeseen conditions.

All **LINTECH** shafts, shaft assemblies, linear bearings, pillow blocks and carriage assemblies are shipped lightly coated with a rust preventative oil in the bearings or on the shafts. This will help prevent corrosion during the shipping period of the product. It is highly recommended that all shafts, shaft assemblies, linear bearings, pillow blocks and carriage assemblies be lubricated during installation or prior to operation. Also, periodic re-lubrication of the linear bearings and shafts, will help assure that the rated life of the system is obtained.

NOTE: Use of WD-40 or other cleaning solvents should strictly be avoided as they can cause damage to the linear bearing and shaft.

Frictional Resistance

The total friction resistance of a **LINTECH** linear bearing, pillow block or carriage assembly can be calculated by using the following equation.

$$R = [W \times \mu] + F_s$$

R = Frictional resistance (lbs)

W = Load weight (lbs)

μ = coefficient of friction

F_s = Frictional resistance - seal drag (lbs)

Note: **LINTECH** recommends using **μ** .01 for all linear bearing systems.

The coefficient of friction (**μ**) of a **LINTECH** linear bearing, pillow block or carriage assembly consists of the rolling friction and the static (breakaway) friction. Two main factors affect the coefficient value. The type of lubrication used (i.e. oil, grease, or none) and the ratio between the total load weight and the dynamic load rating of the linear bearing, pillow block or carriage assembly used.

For most applications, **LINTECH** recommends using a value of .01 for the coefficient of friction. This value can be used for all linear bearings systems. The .01 value provides for an adequate safety margin when evaluating system performance. Other frictional resistances of a **LINTECH** linear bearing are seal drag and system preload. While wiper seals are used to retain lubricants and prevent entry of foreign particles into the linear bearing, they will increase the frictional resistance of the system. Increasing the preload of a linear bearing will also add extra frictional resistance. The chart below lists the nominal values for frictional seal drag of **LINTECH** linear bearings, pillow blocks and carriage assemblies.

Frictional Resistance - F_s (seal drag)

Bearing size -S (Sealed Versions) and Pillow Blocks	F _s (lbs)	Carriage Model TRCA series	F _s (lbs)
Single, 0.50" diameter	0.5	TRCA-8-xx	2.0
Single, 0.62" diameter	0.4	TRCA-10-xx	1.6
Single, 0.75" diameter	0.4	TRCA-12-xx	1.6
Single, 1.00" diameter	0.4	TRCA-16-xx	1.6
Single, 1.25" diameter	5.0	TRCA-20-xx	20.0
Single, 1.50" diameter	7.0	TRCA-24-xx	28.0
Single, 2.00" diameter	8.0	TRCA-32-xx	32.0
Double, 0.50" diameter	0.5	TRCA-8-6	1.0
Double, 0.62" diameter	0.4	TRCA-10-6	0.8
Double, 0.75" diameter	0.4	TRCA-12-6	0.8
Double, 1.00" diameter	0.4	TRCA-16-6	0.8
Double, 1.25" diameter	5.0	TRCA-20-8	10.0
Double, 1.50" diameter	7.0	TRCA-24-12	14.0

Travel Life

The rated life of a linear bearing, pillow block or carriage assembly is measured in inches (or km) of travel under a specified load. The failure of a linear bearing system occurs when the operating stresses from the rolling balls in the linear bushing cause material fatigue, resulting in flaking of the steel balls or steel shaft and/or grooving in the steel shaft.

Every linear bearing, pillow block or carriage assembly has a dynamic load rating associated with it based on a L_{10} life of 2 million inches of travel (approximately 50 km). For most applications, knowing the load applied to a linear bearing and the life required is all that is needed in selecting the proper components for the task at hand.

For more demanding applications the hardness of the shaft used, operating temperature, direction of the load, additional shock loads, and linear speed of the bearing are all factors that should be considered. This allows for an accurate prediction of the dynamic life of a linear bearing, pillow block or carriage assembly in a specific application.

Load Ratings

The applied load that a linear bearing, pillow block or carriage assembly will see needs to be compared against the load capacity of that component. The dynamic load rating of a linear bearing, pillow block or carriage assembly pertains to the component in motion and this load rating is based on the number of inches (or km) traveled.

Required Life

It is important to evaluate the required or expected life from a linear bearing system for a given application load. This required life is specified by the user as the desired life prior to a possible failure. This period of time (usually in years) then will need to be converted into a travel distance (typically inches or km) to select the appropriate size linear bearing, pillow block or carriage assembly.

Required Life Examples

Below are two examples which illustrate the importance of a dynamic load rating based upon travel life. These two applications could lead to the selection of different components due to the difference in the number of required inches of travel, even though the the applied load is the same 150 lbs (68 kg).

Example 1:

$$\begin{array}{l}
 \text{assembly needs to last 6 years} \\
 \text{with} \\
 \text{a 10 inch move out, then back 10 inches every 90 seconds} \\
 \text{for} \\
 \text{8 hours per day} \\
 \text{for} \\
 \text{5 days per week} \\
 \text{and} \\
 \text{50 weeks per year}
 \end{array}$$

$$\frac{(10 \times 2) \text{ inches}}{90 \text{ sec}} \times \frac{60 \text{ sec}}{1 \text{ min}} \times \frac{60 \text{ min}}{1 \text{ hr}} \times \frac{8 \text{ hr}}{1 \text{ day}} \times \frac{5 \text{ days}}{1 \text{ week}} \times \frac{50 \text{ weeks}}{1 \text{ yr}} \times 6 \text{ years} = \mathbf{9,590,400} \text{ inches of travel}$$

Example 2:

$$\begin{array}{l}
 \text{assembly needs to last 8 years} \\
 \text{with} \\
 \text{(24) 1 inch moves out, then back 24 inches every 30 seconds} \\
 \text{for} \\
 \text{12 hours per day} \\
 \text{for} \\
 \text{7 days per week} \\
 \text{and} \\
 \text{52 weeks per year}
 \end{array}$$

$$\frac{(24 \times 2) \text{ inches}}{30 \text{ sec}} \times \frac{60 \text{ sec}}{1 \text{ min}} \times \frac{60 \text{ min}}{1 \text{ hr}} \times \frac{12 \text{ hr}}{1 \text{ day}} \times \frac{7 \text{ days}}{1 \text{ week}} \times \frac{52 \text{ weeks}}{1 \text{ yr}} \times 8 \text{ years} = \mathbf{201,277,440} \text{ inches of travel}$$

Safety Factors

As a practice, safety factors should always be used when selecting a linear bearing, pillow block or carriage assembly for a given application. For most real world applications people do use safety factors. However, sometimes the incorrect safety factor or no safety has been used. This can lead into an unexpected system failure. **LINTECH** provides, in a chart form, different safety factor recommendations for linear bearings, pillow blocks or carriage assemblies. Keep in mind that these recommendations for safety factors are not hard and fast rules. Safety factors for a specific linear bearing system may have to be increased or decreased based upon the application requirements.

Linear Bearing Load Capacities

Linear Bearing Load Capacities are usually specified with a dynamic value. These values are used to help select the proper linear bearing, pillow block or carriage assembly size for a given load/life application. The use of adequate safety factors is a key element in the selection process of a linear bearing system for a given application. Selecting a bearing system with no safety margin can lead to problems relating to performance and long term life.

Dynamic Load Capacity

Dynamic Loads exert a force upon the linear bearing, pillow block or carriage assembly while in motion. Every linear bearing system has a load capacity associated with it that is based upon the number of inches (or km) traveled. If the load applied to the linear bearing system is less than the rated value at 2 million inches (or 50 km) of travel, the linear bearings will have a longer life associated with them that is exponential. Therefore, to properly select a linear bearing, pillow block or carriage assembly that will last the required travel life for an application, the forces acting upon the linear bearings need to be reviewed. Once the force on the heaviest loaded bearing has been determined and a proper safety factor selected, then the life of that bearing, pillow block or carriage assembly can be determined by using a simple mathematical equation.

Even though the forces acting upon a bearing, pillow block or carriage assembly can be calculated, other parameters such as changing loads, speeds, acceleration rates, environments, and lack of lubrication produce extra forces (stresses) that are hard to quantify. As a bearing moves, there are additional resultant loads as a by-product. The rate at which the bearing begins to move a load can have a large impact on its life. The linear bearings see this start/stop rate as a shock load each time. These and other variable loads cannot be calculated precisely. Thus, a safety factor should be applied to account for these loads which could fatigue the system and cause premature failure. See the below chart as a guideline.

Recommended Linear Bearing Dynamic Safety Factors

Impacts or Vibration	Speed (in/sec)	Acceleration (G's)	Min. Safety Factor - S
None	< 5	< 0.25	1.0 - 2.0
Small	5 - 10	0.25 - 0.50	2.0 - 3.0
Medium	10 - 20	0.50 - 1.00	3.0 - 4.0
Large	20 - 50	1.00 - 1.50	4.0 - 6.0
Very Large	> 50	> 1.50	6.0 - 8.0

Safety Factor Example

The application calls for moving a part (weight = 150 lbs) that is mounted to a carriage assembly. The carriage assembly will be moved to various positions at a speed of 9 IPS, with an acceleration of 0.75 G's.

From above chart - use a 3.5 safety factor


$$\begin{array}{lcl}
 \text{Load} & \text{Safety Factor} & \text{Select a carriage assembly that has a dynamic capacity greater than this value} \\
 150 & \times & 3.5 = 525 \text{ lbs}
 \end{array}$$

Hardness factor - F_H

The maximum travel life of a linear bearing is achieved when the shaft surface has a hardness value greater than (>) Rockwell 60C. This hardness assures that no shaft grooving or flaking will occur under normal operating conditions.

<i>LINTECH</i> SL, SS, SN, SM, SA & TRSA	Rockwell Hardness	F_H factor
standard 1060 steel shafts	60-65C	1.00
440C stainless steel shafts	50-55C	.52
chrome plated 1060 steel shafts	67-72C	1.00


When using *LINTECH* bearings, pillow blocks or TRCA carriage assemblies with different shafting and hardness ratings, refer to the Shaft Hardness graph below for the correction factor.

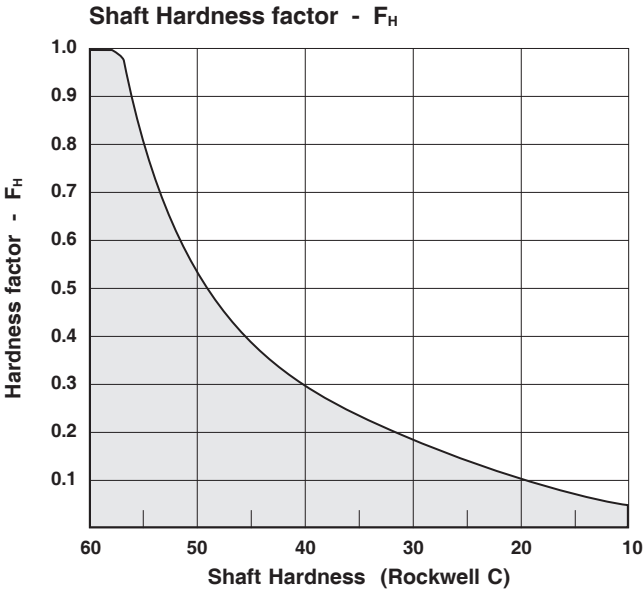

Temperature factor - F_T

Ambient temperatures over 212° F (100° C) will fatigue any linear bearing system, and will cause a decrease in travel life. Please note that some *LINTECH* linear bearings, pillow blocks and carriage assemblies have a maximum operating ambient temperature of 185° F. Therefore these bearings, pillow blocks or carriage assemblies, should never be used in ambient temperatures above 185° F.

Refer to the temperature graph below for the correction factor when using a linear bearing system in an ambient temperature that exceeds 212° F (100° C).

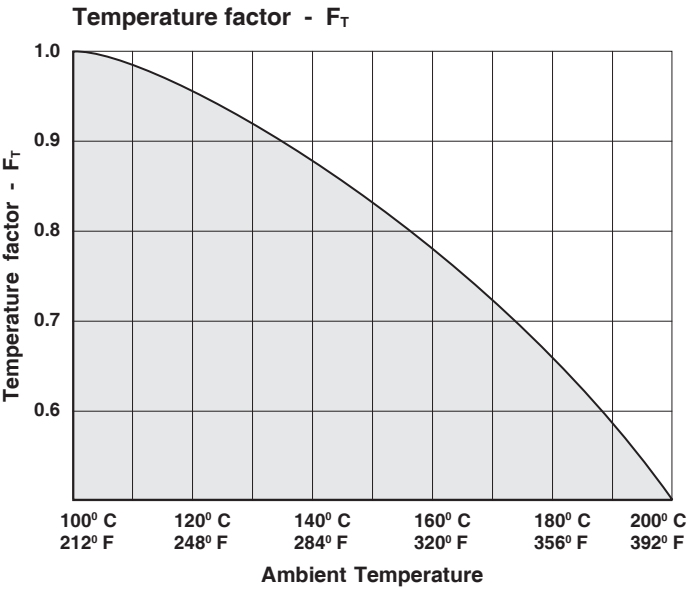


Load direction factor - F_L


The maximum travel life of a linear bearing, pillow block or carriage assembly may need to be de-rated depending upon the direction the load is applied to the bearing. The Polar charts shown below for each bearing type indicate the de-rating factor (or multiplier) based upon the direction the load is applied to the bearing. In most applications not all the bearings will see the same applied load, so you can use the adjacent equation to determine the estimated life based upon the heaviest loaded bearing or the bearing which requires the greatest de-rating factor. This will yield a system life value showing the bearing which has the lowest overall travel life. To use the below graphs, simply find the intersecting point based upon the direction of the load (that the bearing sees) and then use the de-rating factor (i.e. 0.9, etc.), if any.

$$L = \left[F_H \times F_T \times F_L \times \frac{R}{F \times S} \right]^3 \times B$$


- L** = normal travel life millions of inches (or Km)
- R** = rated dynamic load capacity of linear bearing, or carriage at 2 million inches of travel (or 50 Km)
- F** = user applied load
- B** = either 2 millions of inches (or 50 Km)
- F_H** = shaft hardness factor
- F_T** = environment temperature factor
- F_L** = load direction factor
- S** = dynamic safety factor

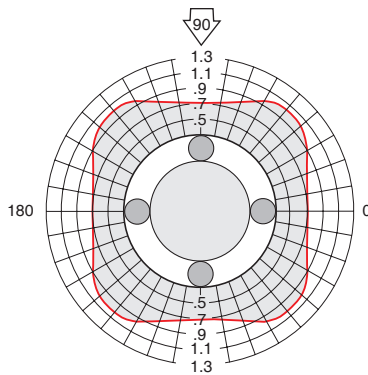


LBC-4, LBCA-4
LBC-6, LBCA-6
LBC-8, LBCA-8, SLBC-8, DLBC-8
LBCA-10
LBCME-8

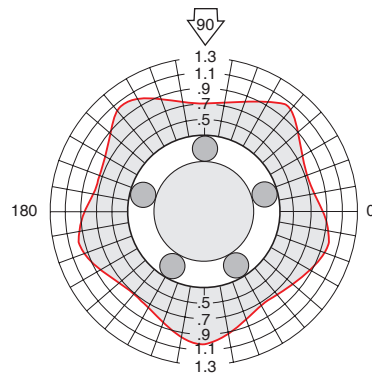


LBC-10, SLBC-10, DLBC-10
LBCA-12, LBCA-16
LBCME-10
LBCME-12
LBCM-16, LBCME-16

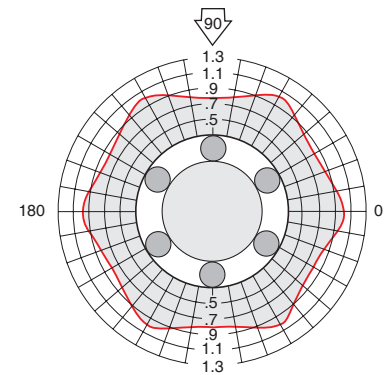


LBC-12, SLBC-12, DLBC-12
LBC-16, SLBC-16, DLBC-16
LBC-20, LBCA-20, SLBC-20, DLBC-20
LBC-24, LBCA-24, SLBC-24, DLBC-24
LBC-32, LBCA-32, SLBC-32
LBCM-20, LBCM-25, LBCM-30, LBCM-40
LBCME-20, LBCME-25, LBCME-30
LBCME-40, LBCME-50

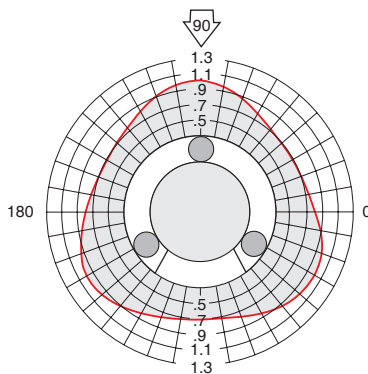

LBCA-4
LBOA-8
LBOA-10

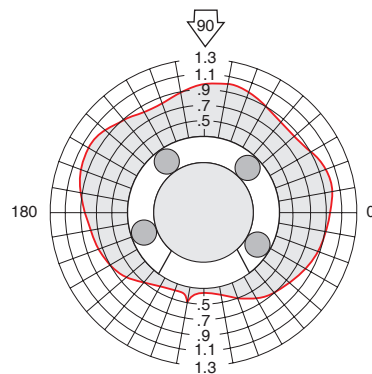

LBO-8, SLBO-8, DLBO-8
LBO-10, SLBO-10, DLBO-10
LBOA-12, LBOA-16
LBOME-12
LBOM-16, LBOME-16

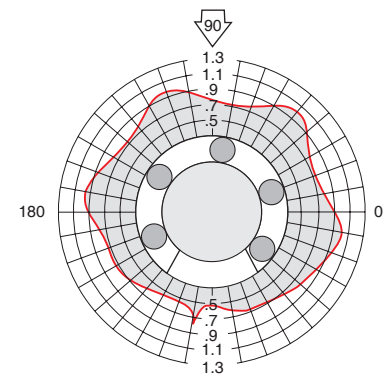


LBO-12, SLBO-12, DLBO-12
LBO-16, SLBO-16, DLBO-16
LBO-20, LBOA-20, SLBO-20, DLBO-20
LBO-24, LBOA-24, SLBO-24, DLBO-24
LBO-32, LBOA-32, SLBO-32
LBOM-20, LBOM-25, LBOM-30, LBOM-40
LBOME-20, LBOME-25, LBOME-30
LBOME-40, LBOME-50

Load direction factor - F_L


The maximum travel life of a linear bearing, pillow block or carriage assembly may need to be de-rated depending upon the direction the load is applied to the bearing. The Polar charts shown below for each bearing type indicate the de-rating factor (or multiplier) based upon the direction the load is applied to the bearing. In most applications not all the bearings will see the same applied load, so you can use the adjacent equation to determine the estimated life based upon the heaviest loaded bearing or the bearing which requires the greatest de-rating factor. This will yield a system life value showing the bearing which has the lowest overall travel life. To use the below graphs, simply find the intersecting point based upon the direction of the load (that the bearing sees) and then use the de-rating factor (i.e. 0.9, etc.), if any.

$$L = \left[F_H \times F_T \times F_L \times \frac{R}{F \times S} \right]^3 \times B$$

- L** = normal travel life millions of inches (or Km)
- R** = rated dynamic load capacity of linear bearing, or carriage at 2 million inches of travel (or 50 Km)
- F** = user applied load
- B** = either 2 millions of inches (or 50 Km)
- F_H** = shaft hardness factor
- F_T** = environment temperature factor
- F_L** = load direction factor
- S** = dynamic safety factor

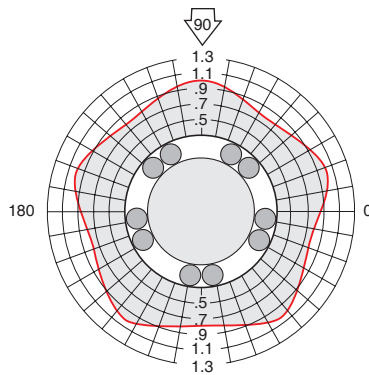

LBCH-12, LBCH-16
LBCH-20, LBCH-24


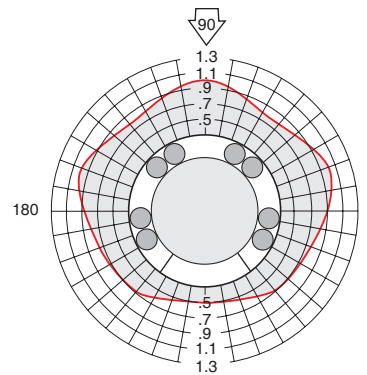


LBOH-12, LBOH-16
LBOH-20, LBOH-24

All individual bearing force equations below pertain to a four bearing carriage which is at constant uniform velocity or with the carriage at rest. During acceleration and deceleration intervals of a positioning system, the force exerted upon an individual bearing changes as the acceleration or deceleration rate varies. In most cases, the extra force acting upon an individual bearing during the acceleration interval is offset by a reduced force during the deceleration interval. Therefore, using just the constant uniform velocity equations will adequately determine the life of an individual bearing for a particular application.

- d_1 - distance between center lines of shafts or rails (in)
- d_2 - distance between center lines of linear bearing blocks (in)
- d_3 - distance between carriage center and load center of gravity (in)
- d_4 - distance between carriage center and load center of gravity (in)
- d_r - distance between carriage surface and linear bearings (in)
- F_{BX} - force acting upon bearing in X-axis direction (lbs)
- F_{BY} - force acting upon bearing in Y-axis direction (lbs)
- F_{BZ} - force acting upon bearing in Z-axis direction (lbs)
- W - load weight (lbs)

Horizontal Applications

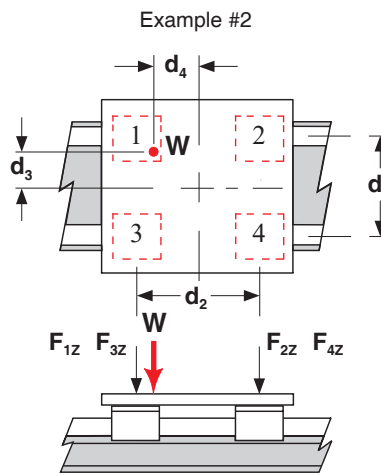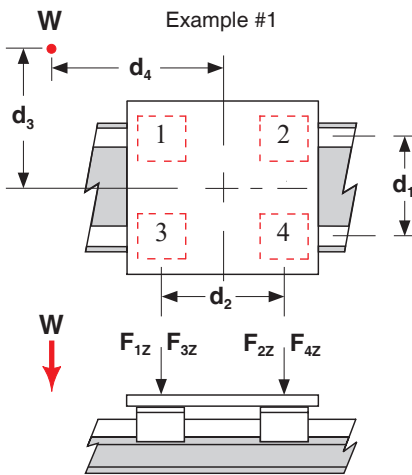



$$F_{1Z} = \frac{W}{4} + \left[\frac{W}{2} \times \frac{d_4}{d_2} \right] + \left[\frac{W}{2} \times \frac{d_3}{d_1} \right]$$

$$F_{2Z} = \frac{W}{4} - \left[\frac{W}{2} \times \frac{d_4}{d_2} \right] + \left[\frac{W}{2} \times \frac{d_3}{d_1} \right]$$

$$F_{3Z} = \frac{W}{4} + \left[\frac{W}{2} \times \frac{d_4}{d_2} \right] - \left[\frac{W}{2} \times \frac{d_3}{d_1} \right]$$

$$F_{4Z} = \frac{W}{4} - \left[\frac{W}{2} \times \frac{d_4}{d_2} \right] - \left[\frac{W}{2} \times \frac{d_3}{d_1} \right]$$


Side Mounted Applications

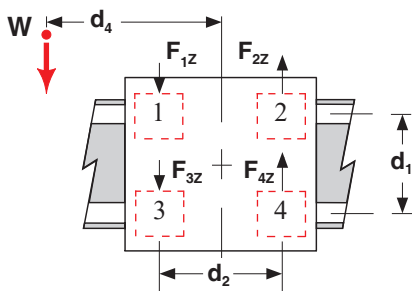

$$F_{1Z} = F_{3Z} = \frac{W}{4} + \left[\frac{W}{2} \times \frac{d_4}{d_2} \right] \quad F_{1Y} \sim F_{3Y} = \left[\frac{W}{2} \times \frac{d_3 + d_r}{d_1} \right]$$

$$F_{2Z} = F_{4Z} = \frac{W}{4} - \left[\frac{W}{2} \times \frac{d_4}{d_2} \right]$$

Vertical Applications

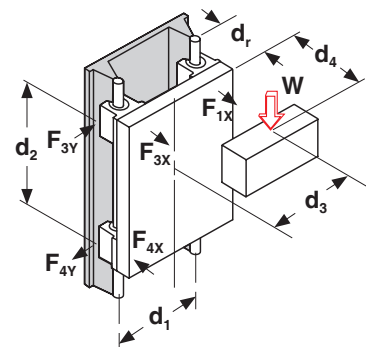

$$F_{1X} \sim F_{3X} = \frac{W}{2} \times \frac{d_4 + d_r}{d_2} \quad F_{1Y} \sim F_{3Y} = \frac{W}{2} \times \frac{d_3}{d_2}$$

$$F_{1X} + F_{3X} \sim F_{2X} + F_{4X} \quad F_{1Y} + F_{3Y} \sim F_{2Y} + F_{4Y}$$

Mean Bearing Load Calculation

When the force acting upon an individual bearing varies, as is the case with the bottom axis bearings of a multi-axes positioning system, a mean bearing load calculation determines the life of that bearing.

$$F_{avg} = \frac{1}{3} (F_{min} + 2 \times F_{max})$$


F_{avg} - average force acting upon bearing (lbs)

F_{min} - minimum force acting upon bearing (lbs)

F_{max} - maximum force acting upon bearing (lbs)

TRCA Rated Load Capacity

The **LINTECH** TRCA series, **TWIN RAIL**® carriage assembly consists of (2) DLBO or (4) SLBO series pillow blocks mounted to a precision machined aluminum plate. The pillow blocks are mounted, aligned, and then doweled in-place. They are designed to mate directly with the **LINTECH** TRSA series, **TWIN RAIL**® shaft assemblies. Using these two series in combination with each other will eliminate the requirement to align and set-up a mechanical positioning system to be parallel.

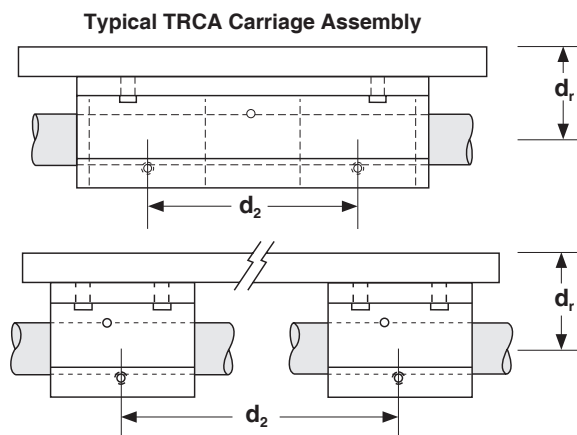

TRCA Carriage Assemblies

Model Number	Nominal Shaft Dia. (inches)	Carriage Length (inches)	Linear Bearing Used	Each Bearing ⁽¹⁾ Dyn. Load Capacity (lbs)	Dyn. Load Capacity ⁽¹⁾ (lbs)	d _r (inches)	d ₁ (inches)	d ₂ (inches)
TRCA8-6	0.500	6.00	DLBO-8	230	920	1.062	3.00	1.90
TRCA8-12	0.500	12.00	SLBO-8	230	920	1.062	3.00	10.00
TRCA8-18	0.500	18.00	SLBO-8	230	920	1.062	3.00	16.00
TRCA10-6	0.625	6.00	DLBO-10	380	1,520	1.250	3.75	2.15
TRCA10-12	0.625	12.00	SLBO-10	380	1,520	1.250	3.75	9.75
TRCA10-18	0.625	18.00	SLBO-10	380	1,520	1.250	3.75	15.75
TRCA12-6	0.750	6.00	DLBO-12	470	1,880	1.437	4.50	2.50
TRCA12-12	0.750	12.00	SLBO-12	470	1,880	1.437	4.50	9.62
TRCA12-18	0.750	18.00	SLBO-12	470	1,880	1.437	4.50	15.62
TRCA16-6	1.000	6.00	DLBO-16	820	3,280	1.687	5.25	3.25
TRCA16-12	1.000	12.00	SLBO-16	820	3,280	1.687	5.25	8.87
TRCA16-18	1.000	18.00	SLBO-16	820	3,280	1.687	5.25	14.87
TRCA16-24	1.000	24.00	SLBO-16	820	3,280	1.687	5.25	20.87
TRCA20-8	1.250	8.00	DLBO-20	1,210	4,840	2.250	6.00	3.90
TRCA20-12	1.250	12.00	SLBO-20	1,210	4,840	2.250	6.00	8.12
TRCA20-18	1.250	18.00	SLBO-20	1,210	4,840	2.250	6.00	14.12
TRCA20-24	1.250	24.00	SLBO-20	1,210	4,840	2.250	6.00	20.12
TRCA24-12	1.500	12.00	DLBO-24	1,520	6,080	2.750	6.62	5.00
TRCA24-18	1.500	18.00	SLBO-24	1,520	6,080	2.750	6.62	13.75
TRCA24-24	1.500	24.00	SLBO-24	1,520	6,080	2.750	6.62	19.75
TRCA24-30	1.500	30.00	SLBO-24	1,520	6,080	2.750	6.62	25.75
TRCA32-18	2.000	18.00	SLBO-32	2,410	9,640	3.375	7.25	12.75
TRCA32-24	2.000	24.00	SLBO-32	2,410	9,640	3.375	7.25	18.75
TRCA32-30	2.000	30.00	SLBO-32	2,410	9,640	3.375	7.25	24.75

Footnotes:

(1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C). The actual load rating, and life, is dependent upon factors detailed on pages 6 to 11.

TRCA Rated Load Capacity

The dynamic load capacity of a **LINTECH** TRCA carriage assembly is based upon having the load forces centered on the carriage and the combined dynamic load capacity values of the SLBO or DLBO linear bearings used. The rated values are based on a L_{10} life of 2 million inches of travel (or 50 km) and with the load forces applied downward onto the carriage assembly.

For a given carriage assembly, as the load force decreases, the life of the carriage assembly will increase exponentially. The life of a carriage assembly, used in an application, can be determined by reviewing the load considerations found on pages 6 to 13.

TRCA Rated Moment Loads


When using a **LINTECH** TRCA carriage assembly in an application, a moment load exists when the load center of gravity is located away from the center of the carriage assembly. The life of a carriage assembly is determined by the heaviest loaded linear bearing. Follow the steps below to determine if a specific TRCA carriage assembly will operate sufficiently in a given application.

Step 1: Calculate the forces acting on each of the individual bearings for a given configuration and TRCA carriage assembly by using the equations on page 11.




Step 2: Compare the calculated values with the rated dynamic load capacity values for the SLBO or DLBO linear bearings used on the TRCA carriage assembly. Make sure the calculated values are below the rated values. **Note:** If the calculated forces are acting on the open end of a linear bearing, reduce the rated dynamic load capacity of that bearing by the value shown on the Polar Charts found on page 9.

Step 3: Follow the information on pages 6 through 13 to determine the theoretical travel life of the selected carriage assembly in inches (or km) of travel.

Load Centered on Carriage

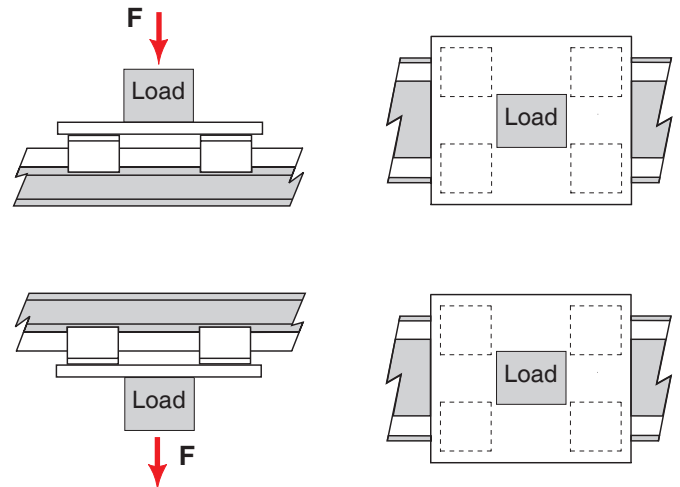

Load Center away from Carriage Center

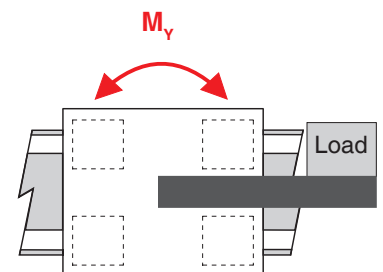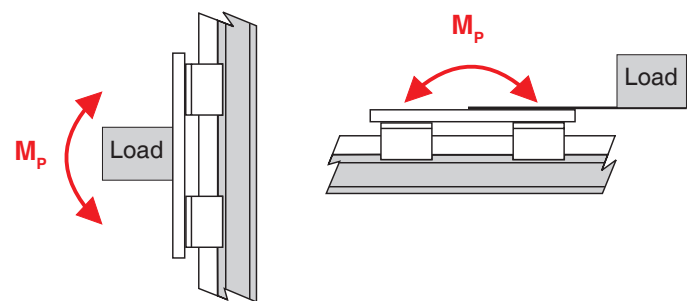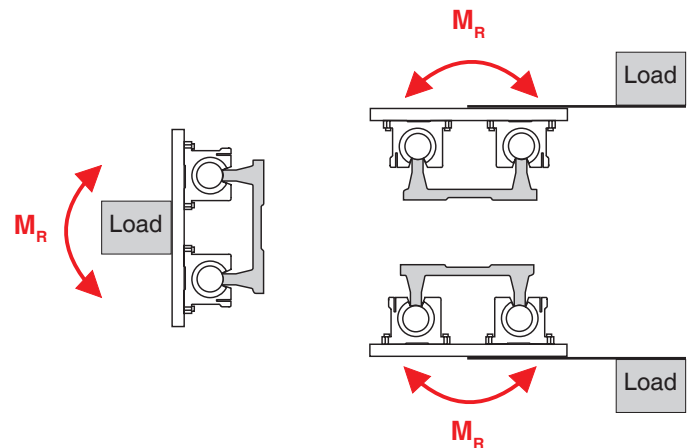

Shaft Deflection



The equations below can be used when **LINTECH** closed linear bearings (LBC, LBCA, SLBC or DLBC series), and precision hardened shafting is used with shaft end supports (ES series), or with threaded shaft ends attached to a plate on each end. The estimated deflection that a configuration will experience is dependent upon the shaft diameter, unsupported shaft length, shaft material, along with the type and number of bearings being used.

Minimizing the deflection of the components will reduce additional stresses which can lead to premature failure. Excessive deflection can cause binding or rough operation when the bearings are at the area of travel furthest from the supported portion, which is usually at mid-stroke.

- D** = deflection (inches) (mm)
W = user applied load (lbs) (N)
L = length of unsupported shaft (inches) (mm)
C = distance from support to center of first bearing (inches) (mm)
T = shaft weight per length (lbs/in) (N/mm)
S_k = strength constant - modulus of elasticity x moment of inertia

Model Number	Nominal Shaft Diameter (inches)	Shaft Weight T (lbs/in)	Strength Factor S _k (lb/in ²)
Sx4	0.250	0.014	5,700
Sx6	0.375	0.031	29,100
Sx8	0.500	0.055	91,800
Sx10	0.625	0.086	224,400
Sx12	0.750	0.125	465,000
Sx16	1.000	0.222	1,470,000
Sx20	1.250	0.348	3,594,000
Sx24	1.500	0.500	7,455,000
Sx32	2.000	0.890	23,562,000

Model Number	Nominal Shaft Diameter (mm)	Shaft Weight T (N/mm)	Strength Factor S _k (N/mm ²)
SM8	8	0.0038	38.26
SM10	10	0.0061	93.41
SM12	12	0.0087	193.70
SM16	16	0.0154	612.20
SM20	20	0.0240	1,495.00
SM25	25	0.0379	3,649.00
SM30	30	0.0542	7,566.00
SM40	40	0.0968	23,910.00
SM50	50	0.1513	58,380.00

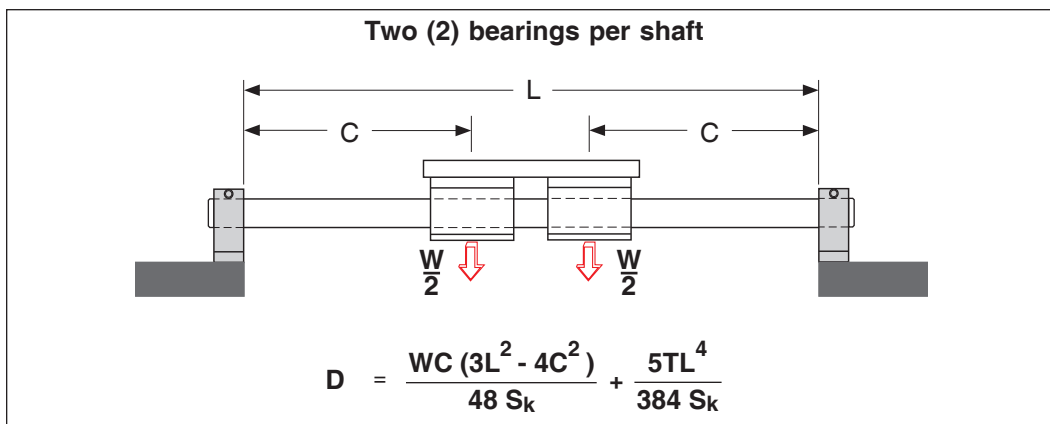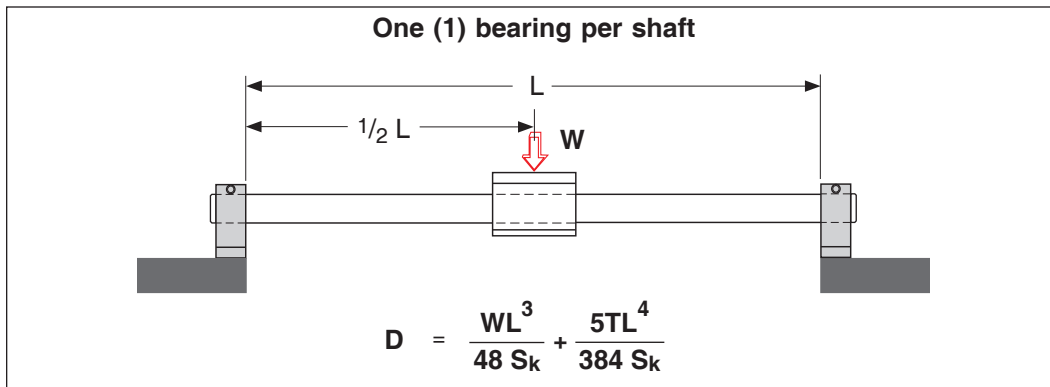


Life Example

The following example is provided to aid in the understanding of how the various charts and equations in this technical section should be implemented. For this example, the life estimation will be determined for an application that will use a **LINTECH** TRCA carriage assembly with a TRSA shaft assembly.

Application Parameters

The load weight of 100 lbs is centered on the TRCA carriage along with a 12 inch total travel in the horizontal plane. The **LINTECH** TRSA shaft assembly will use 440C stainless steel shafts, and will be mounted to a support structure so that the carriage will be inverted. Various outward moves will be made with a maximum return speed of 5 IPS. This return speed will be the most demanding speed profile in the application and the installation environment will be at 80° F.

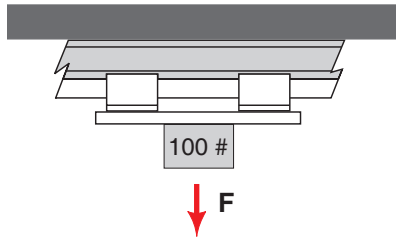

Different Options

In the application below, utilizing a custom carriage length which has six (6) SLBO-12 pillow blocks instead of two (2) DLBO-12 pillow blocks on the TRCA12 carriage assembly, would increase the R value from 1,880 to 2,820 lbs. Thus, increasing the L life estimate value to 98,538,824 inches of travel from 29,196,688 inches of travel.

Another option would be to utilize chrome plated shafts for the TRSA assembly instead of the 440C stainless steel shafts. This would increase the shaft hardness factor to 1 instead of 0.52. Thus, increasing the L life estimate value to 207,646,00 inches of travel from 29,196,688 inches of travel for just using the standard TRCA12-6.

Determine Safety and Correction Factors

- | | |
|---|----------------------------|
| Step 1: Use chart on page 7 for 5 IPS to select a safety factor: | S = 2 |
| Step 2: Use chart on page 8 for 440C to select a shaft hardness factor: | F_H = .52 |
| Step 3: Use graph on page 8 for 80° F to select a temperature factor: | F_T = 1 |
| Step 4: Would like to use a TRCA12-6. From chart on page 12: | R = 1,880 lbs |
| Step 5: Use polar graph on page 9 to select load direction factor: | F_L = .5 |
| Step 6: Use the equation on page 9 to compute the estimated life: | |

$$L = \left[F_H \times F_T \times F_L \times \frac{R}{F \times S} \right]^3 \times B$$


$$L = \left[.52 \times 1 \times .5 \times \frac{1880}{100 \times 2} \right]^3 \times 2,000,000$$

$$L = 29,196,688 \text{ inches of travel}$$

- Step 7: Use the equation on page 6 to determine the required life of your application. If the estimated L value above (for a 100 pound load) is less than your desired life, then select a larger carriage assembly from the chart on page 12, and then plug its dynamic load capacity for the R value into the equation above to re-calculate the estimated L life. As an example, the TRCA16-6 load rating of 3,120 lbs would increase the L life estimate to 133,451,615 inches of travel from 29,196,688 inches of travel.

Shafting & Shaft Assembly Applications


LINTECH shafts, shaft assemblies, linear bearings, pillow blocks and carriage assemblies are used in many different applications requiring mechanical motion. These components are utilized with air cylinders, hydraulic actuators, lead screws, rack & pinion systems, belt & pulleys, chain & sprockets, as well as in manual positioning systems. **LINTECH** individual shafts or SA shaft assemblies, along with individual linear bearings or pillow blocks, are typically used when a designer wishes to spread apart the shafts or SA shaft assemblies and make a custom carriage assembly. The TRSA shaft assemblies and TRCA carriage assemblies are utilized together when ease of installation is of essence.

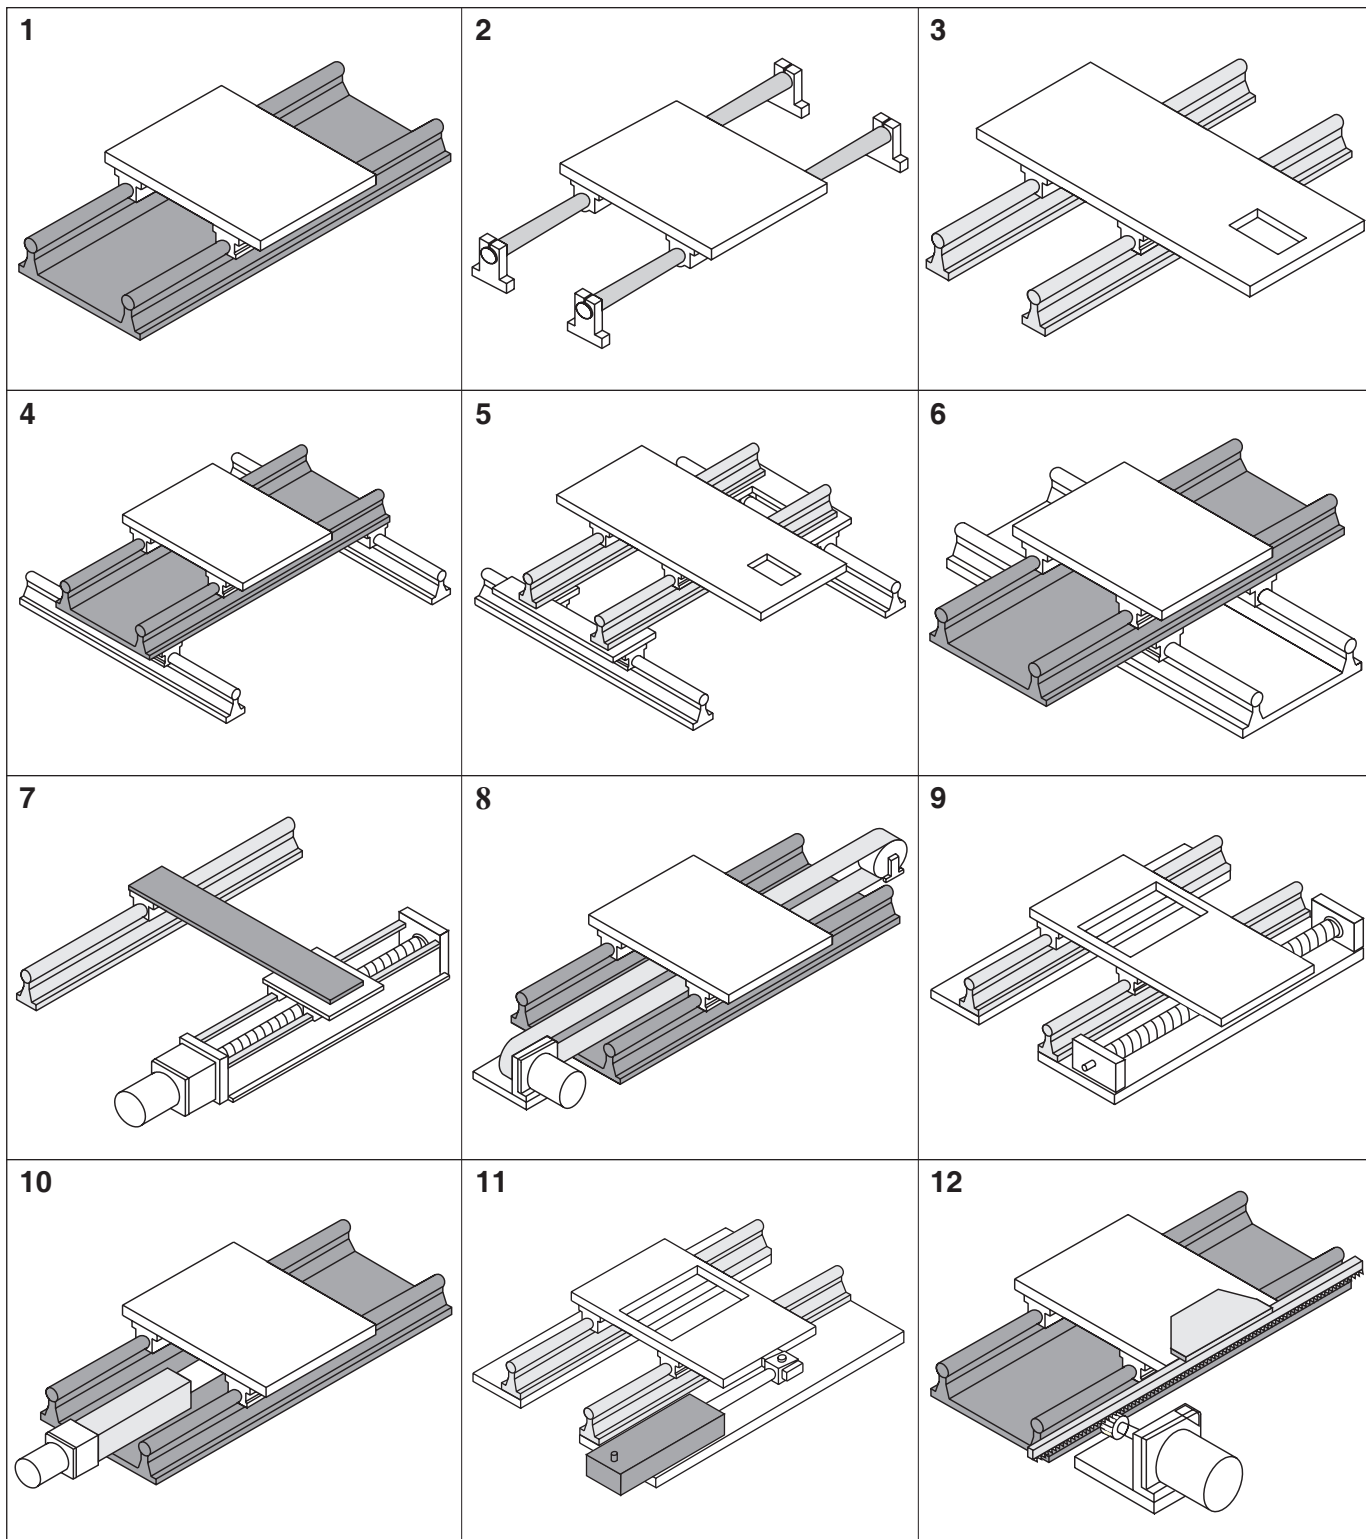

Linear Bearings, Pillow Blocks and Carriage Assemblies

LBCA & LBOA series	20 - 21
LBC & LBO series	22 - 23
LBCH & LBOH series	24 - 25
LBCM & LBOM series	26 - 27
LBCME & LBOME series	28 - 29
Pillow Block series	30 - 32
TRCA series	33 - 36
Options	37 - 37
Metric Pillow Blocks	38 - 39



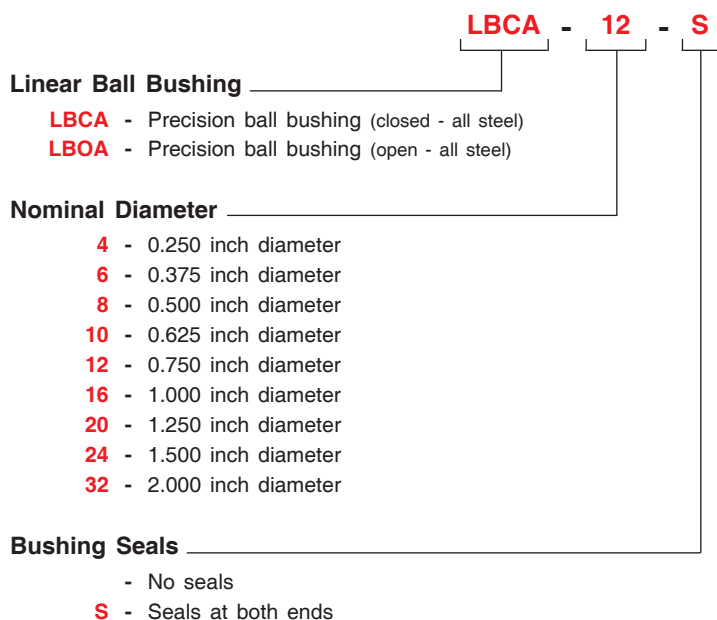


- 4** - 0.250 inch diameter
6 - 0.375 inch diameter
8 - 0.500 inch diameter
10 - 0.625 inch diameter
12 - 0.750 inch diameter
16 - 1.000 inch diameter
20 - 1.250 inch diameter
24 - 1.500 inch diameter
32 - 2.000 inch diameter

Specifications: LBCA & LBOA Linear Precision Ball Bushings

Operating Temperature	0° F to + 600° F (without seals)		0° F to + 185° F (with seals)																																																																				
Maximum Speed	10 ft/second																																																																						
Bushing Seals (optional)	Internal Wiper Seals on both ends, Plastic Bearing Retainer																																																																						
Matching Shaft	Class S (SS series), hardened & ground shafting (see pages 42 - 43)																																																																						
Housing Tolerances C = clearance	<table><tr><th colspan="3">LBCA (closed style)</th><th colspan="2">LBOA (open style)</th></tr><tr><th rowspan="2">Nominal Shaft Diameter (inches)</th><th colspan="2">Recommended Housing Bore</th><th rowspan="2">Bearing and Shaft Fit-up (inches)</th><th rowspan="2">Nominal Shaft Diameter (inches)</th><th rowspan="2">Recommended Housing Bore before adjustment (inches)</th></tr><tr><th>Normal Fit (inches)</th><th>Press Fit (inches)</th></tr><tr><td>0.250</td><td>.5005 / .5000</td><td>.4995 / .4990</td><td>.0015C / .0005C</td><td></td><td></td></tr><tr><td>0.375</td><td>.6255 / .6250</td><td>.6245 / .6240</td><td>.0015C / .0005C</td><td></td><td></td></tr><tr><td>0.500</td><td>.8755 / .8750</td><td>.8745 / .8740</td><td>.0015C / .0005C</td><td>0.500</td><td>.8760 / .8740</td></tr><tr><td>0.625</td><td>1.1255 / 1.1250</td><td>1.1245 / 1.1240</td><td>.0015C / .0005C</td><td>0.625</td><td>1.1260 / 1.1240</td></tr><tr><td>0.750</td><td>1.2505 / 1.2500</td><td>1.2495 / 1.2490</td><td>.0015C / .0005C</td><td>0.750</td><td>1.2510 / 1.2490</td></tr><tr><td>1.000</td><td>1.5630 / 1.5625</td><td>1.5620 / 1.5615</td><td>.0015C / .0005C</td><td>1.000</td><td>1.5635 / 1.5615</td></tr><tr><td>1.250</td><td>2.0010 / 2.0000</td><td>1.9993 / 1.9983</td><td>.0015C / .0004C</td><td>1.250</td><td>2.0010 / 1.9990</td></tr><tr><td>1.500</td><td>2.3760 / 2.3750</td><td>2.3743 / 2.3733</td><td>.0016C / .0005C</td><td>1.500</td><td>2.3760 / 2.3740</td></tr><tr><td>2.000</td><td>3.0010 / 3.0000</td><td>2.9992 / 2.9982</td><td>.0020C / .0005C</td><td>2.000</td><td>3.0010 / 2.9990</td></tr></table>				LBCA (closed style)			LBOA (open style)		Nominal Shaft Diameter (inches)	Recommended Housing Bore		Bearing and Shaft Fit-up (inches)	Nominal Shaft Diameter (inches)	Recommended Housing Bore before adjustment (inches)	Normal Fit (inches)	Press Fit (inches)	0.250	.5005 / .5000	.4995 / .4990	.0015C / .0005C			0.375	.6255 / .6250	.6245 / .6240	.0015C / .0005C			0.500	.8755 / .8750	.8745 / .8740	.0015C / .0005C	0.500	.8760 / .8740	0.625	1.1255 / 1.1250	1.1245 / 1.1240	.0015C / .0005C	0.625	1.1260 / 1.1240	0.750	1.2505 / 1.2500	1.2495 / 1.2490	.0015C / .0005C	0.750	1.2510 / 1.2490	1.000	1.5630 / 1.5625	1.5620 / 1.5615	.0015C / .0005C	1.000	1.5635 / 1.5615	1.250	2.0010 / 2.0000	1.9993 / 1.9983	.0015C / .0004C	1.250	2.0010 / 1.9990	1.500	2.3760 / 2.3750	2.3743 / 2.3733	.0016C / .0005C	1.500	2.3760 / 2.3740	2.000	3.0010 / 3.0000	2.9992 / 2.9982	.0020C / .0005C	2.000	3.0010 / 2.9990
LBCA (closed style)			LBOA (open style)																																																																				
Nominal Shaft Diameter (inches)	Recommended Housing Bore		Bearing and Shaft Fit-up (inches)	Nominal Shaft Diameter (inches)	Recommended Housing Bore before adjustment (inches)																																																																		
	Normal Fit (inches)	Press Fit (inches)																																																																					
0.250	.5005 / .5000	.4995 / .4990	.0015C / .0005C																																																																				
0.375	.6255 / .6250	.6245 / .6240	.0015C / .0005C																																																																				
0.500	.8755 / .8750	.8745 / .8740	.0015C / .0005C	0.500	.8760 / .8740																																																																		
0.625	1.1255 / 1.1250	1.1245 / 1.1240	.0015C / .0005C	0.625	1.1260 / 1.1240																																																																		
0.750	1.2505 / 1.2500	1.2495 / 1.2490	.0015C / .0005C	0.750	1.2510 / 1.2490																																																																		
1.000	1.5630 / 1.5625	1.5620 / 1.5615	.0015C / .0005C	1.000	1.5635 / 1.5615																																																																		
1.250	2.0010 / 2.0000	1.9993 / 1.9983	.0015C / .0004C	1.250	2.0010 / 1.9990																																																																		
1.500	2.3760 / 2.3750	2.3743 / 2.3733	.0016C / .0005C	1.500	2.3760 / 2.3740																																																																		
2.000	3.0010 / 3.0000	2.9992 / 2.9982	.0020C / .0005C	2.000	3.0010 / 2.9990																																																																		


Dimensions & Specifications: **LBCA** Precision Ball Bushing (closed)

Model Number	Without Seals	With Seals ⁽²⁾	Nominal Shaft Diameter (inches)	Working Bore Diameter (inches)	Dyn. Load Capacity ⁽¹⁾ (lbs)	Dimensions (inches)				Bearing Weight (lbs)
						A	B	C	D	
LBCA-4		-S	0.250	0.2500/0.2495	19	0.750/0.735	0.515/0.499	0.039	0.5000/0.4996	0.02
LBCA-6		-S	0.375	0.3750/0.3745	37	0.875/0.860	0.640/0.624	0.039	0.6250/0.6246	0.06
LBCA-8		-S	0.500	0.5000/0.4995	85	1.250/1.235	0.967/0.951	0.046	0.8750/0.8746	0.08
LBCA-10		-S	0.625	0.6250/0.6245	150	1.500/1.485	1.108/1.092	0.056	1.1250/1.1246	0.16
LBCA-12		-S	0.750	0.7500/0.7495	200	1.625/1.610	1.170/1.154	0.056	1.2500/1.2496	0.21
LBCA-16		-S	1.000	1.0000/0.9995	350	2.250/2.235	1.759/1.741	0.068	1.5625/1.5621	0.38
LBCA-20		-S	1.250	1.2500/1.2494	520	2.625/2.605	2.009/1.991	0.068	2.0000/1.9995	1.10
LBCA-24		-S	1.500	1.5000/1.4994	770	3.000/2.980	2.415/2.397	0.086	2.3750/2.3745	1.43
LBCA-32		-S	2.000	2.0000/1.9992	1,100	4.000/3.980	3.195/3.177	0.103	3.0000/2.9994	2.75

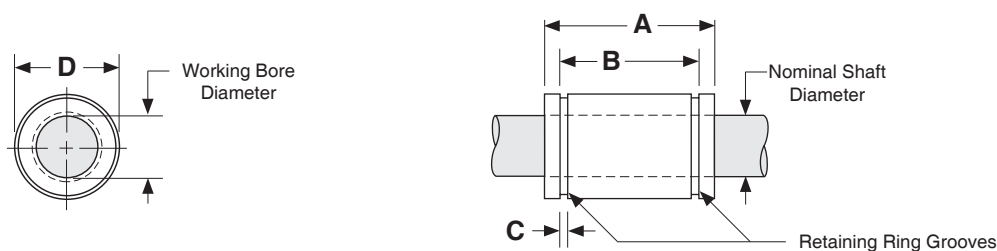


Dimensions & Specifications: **LBOA** Precision Ball Bushing (open)

Model Number	Without Seals	With Seals ⁽²⁾	Nominal Shaft Diameter (inches)	Working Bore Diameter (inches)	Dyn. Load Capacity ⁽¹⁾ (lbs)	Dimensions (inches)					Bearing Weight (lbs)
						A	B	C	D	E min.	
LBOA-8		-S	0.500	0.5005/0.4995	60	1.250/1.235	0.967/0.951	0.046	0.8760/0.8746	0.31	0.07
LBOA-10		-S	0.625	0.6255/0.6245	105	1.500/1.485	1.108/1.092	0.056	1.1260/1.1240	0.38	0.11
LBOA-12		-S	0.750	0.7505/0.7495	140	1.625/1.610	1.170/1.154	0.056	1.2510/1.2490	0.44	0.17
LBOA-16		-S	1.000	1.0005/0.9995	240	2.250/2.235	1.759/1.741	0.068	1.5635/1.5615	0.56	0.32
LBOA-20		-S	1.250	1.2506/1.2494	400	2.625/2.605	2.009/1.991	0.068	2.0010/1.9990	0.63	0.90
LBOA-24		-S	1.500	1.5006/1.4994	600	3.000/2.980	2.415/2.397	0.086	2.3760/2.3740	0.75	1.12
LBOA-32		-S	2.000	2.0008/1.9992	860	4.000/3.980	3.195/3.177	0.103	3.0010/2.9990	1.00	2.16

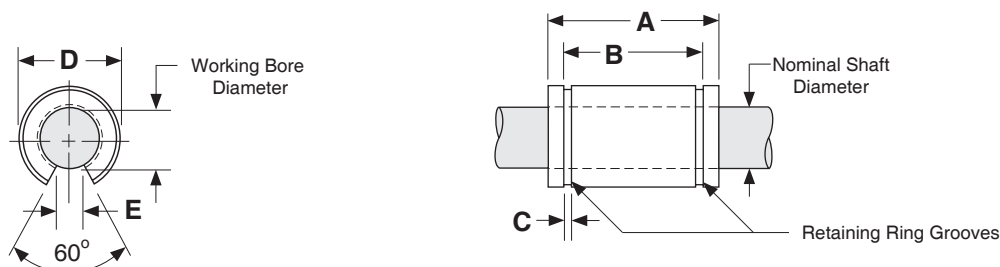

Footnotes:

- (1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C). The actual load rating, and life, is dependent upon factors detailed on pages 6 to 13.
- (2) The bearing retainer is plastic when the internal -S seal option is selected.

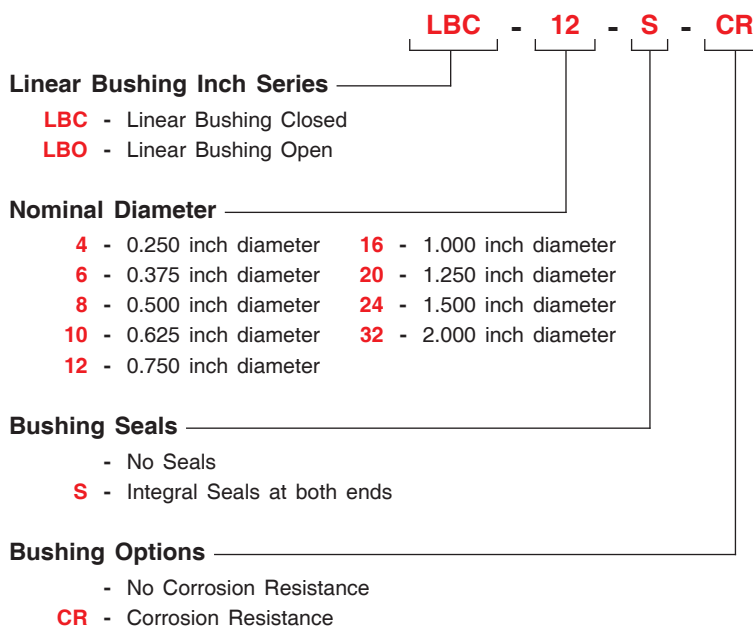


Specifications: **LBC** & **LBO** Linear Bushings (self-aligning)

Operating Temperature	0° F to + 185° F				
Maximum Speed	9.8 ft/sec (3m/sec)				
Bushing Seals	Optional Internal Wiper Seals on both ends				
Matching Shaft	Class L (SL series), hardened & ground shafting (see pages 42 - 43)				
Corrosion Resistance	Electroless nickel plated load plates and stainless steel recirculating balls				
Housing and Shaft Diameter Tolerances C = clearance P = preload					
Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance g6 (inches)	Recommended Housing Bore		Bushing and Shaft Fit-up (before adjustment)	
		Fixed Housing (inches)	Adjustable Housing (inches)	Fixed Housing (inches)	Adjustable Housing (inches)
0.250	-.0002 / -.0006	.5005 / .5000	.5010 / .5000	.0015C / .0000	.002C / .0000
0.375	-.0002 / -.0006	.6255 / .6250	.6260 / .6250	.0015C / .0000	.002C / .0000
0.500	-.0002 / -.0007	.8755 / .8750	.8760 / .8750	.0015C / .0000	.002C / .0000
0.625	-.0002 / -.0007	1.1255 / 1.1250	1.1260 / 1.1250	.0015C / .0000	.002C / .0000
0.750	-.0003 / -.0008	1.2505 / 1.2500	1.2510 / 1.2500	.0015C / .0000	.002C / .0000
1.000	-.0003 / -.0008	1.5630 / 1.5625	1.5635 / 1.5625	.0015C / .0000	.002C / .0000
1.250	-.0004 / -.0010	2.0008 / 2.0000	2.0010 / 2.0000	.0018C / .0001P	.002C / .0000
1.500	-.0004 / -.0010	2.3760 / 2.3750	2.3760 / 2.3750	.0021C / .0000	.0021C / .0000
2.000	-.0004 / -.0012	3.0010 / 3.0000	3.0010 / 3.0000	.0023C / .0002P	.0023C / .0002P


Dimensions & Specifications: **LBC** Linear Bushing (closed)

Model Number Without Seals With Seals		Nominal Shaft Diameter (inches)	Dyn. ⁽¹⁾ Load Capacity (lbs)	# of Ball circuits	Working Bore Diameter (inches)	Housing Bore D (inches)	Dimensions (inches)			Bearing Weight (lbs)
							A	B	C	
LBC-4	-S	0.250	60	4	0.2500/0.2495	0.5005/0.5000	0.750/0.735	0.511/0.501	0.039	0.01
LBC-6	-S	0.375	100	4	0.3750/0.3745	0.6255/0.6250	0.875/0.860	0.699/0.689	0.039	0.02
LBC-8	-S	0.500	245	4	0.5000/0.4995	0.8755/0.8750	1.250/1.230	1.032/1.012	0.050	0.04
LBC-10	-S	0.625	430	5	0.6250/0.6245	1.1255/1.1250	1.500/1.480	1.105/1.095	0.056	0.10
LBC-12	-S	0.750	580	6	0.7500/0.7495	1.2505/1.2500	1.625/1.605	1.270/1.250	0.056	0.14
LBC-16	-S	1.000	980	6	1.0000/0.9995	1.5630/1.5625	2.250/2.230	1.884/1.864	0.068	0.25
LBC-20	-S	1.250	1,460	6	1.2500/1.2494	2.0008/2.0000	2.625/2.600	2.004/1.984	0.068	0.45
LBC-24	-S	1.500	1,830	6	1.5000/1.4994	2.3760/2.3750	3.000/2.970	2.410/2.390	0.086	0.85
LBC-32	-S	2.000	2,830	6	2.0000/1.9992	3.0010/3.0000	4.000/3.960	3.206/3.176	0.105	1.45

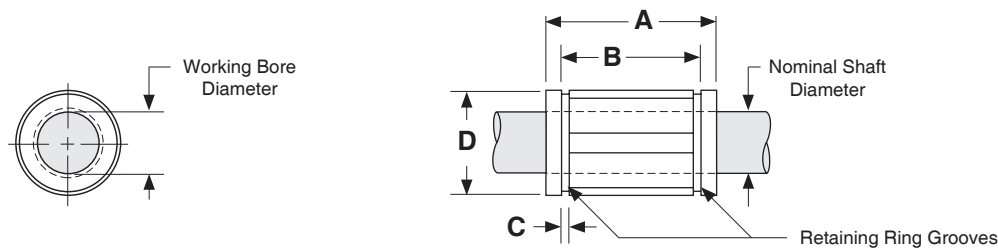

Dimensions & Specifications: **LBO** Linear Bushing (open)

Model Number Without Seals With Seals		Nominal Shaft Diameter (inches)	Dyn. ⁽¹⁾ Load Cap. (lbs)	# of Ball circuits	Working Bore Diameter (inches)	Housing Bore D (inches)	Dimensions (inches)				Retention Hole		Bearing Weight (lbs)
							A	B	C	E min.	F dia.	G (in)	
LBO-8	-S	0.500	230	4	0.5000/0.4995	0.8755/0.8750	1.250/1.230	1.032/1.012	0.050	0.312	.14	.63	0.04
LBO-10	-S	0.625	380	4	0.6250/0.6245	1.1255/1.1250	1.500/1.480	1.105/1.095	0.056	0.375	.11	.13	0.08
LBO-12	-S	0.750	470	5	0.7500/0.7495	1.2505/1.2500	1.625/1.605	1.270/1.250	0.056	0.437	.14	.13	0.12
LBO-16	-S	1.000	820	5	1.0000/0.9995	1.5630/1.5625	2.250/2.230	1.884/1.864	0.068	0.562	.14	.13	0.21
LBO-20	-S	1.250	1,210	5	1.2500/1.2494	2.0008/2.0000	2.625/2.600	2.004/1.984	0.068	0.625	.20	.19	0.38
LBO-24	-S	1.500	1,520	5	1.5000/1.4994	2.3760/2.3750	3.000/2.970	2.410/2.390	0.086	0.750	.20	.19	0.71
LBO-32	-S	2.000	2,410	5	2.0000/1.9992	3.0010/3.0000	4.000/3.960	3.206/3.176	0.103	1.105	.27	.31	1.20


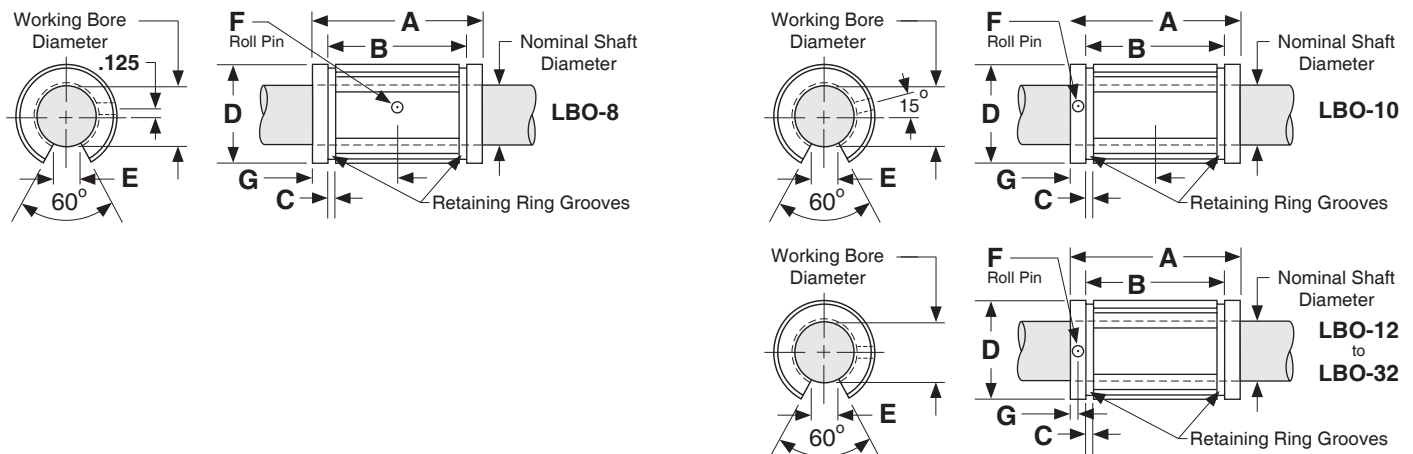


Footnotes:

(1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bushing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C). The actual load rating, and life, is dependent upon factors detailed on pages 6 to 13.

(2) This specification is based upon the bushing being on the shaft. Refer to page 42 for additional details.

Specifications subject to change without notice

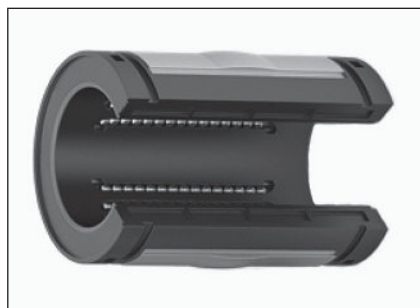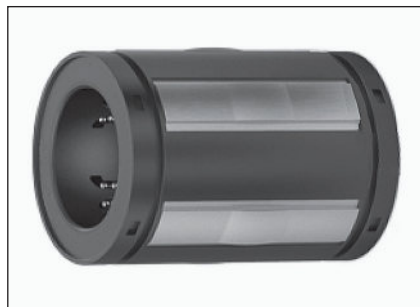

LBCH - **12** - **S** - **CR**

Linear Bushing High Capacity

LBCH - Linear Bushing Closed - High Capacity

LBOH - Linear Bushing Open - High Capacity

Nominal Diameter

12 - 0.750 inch diameter **20** - 1.250 inch diameter

16 - 1.000 inch diameter **24** - 1.500 inch diameter

Bushing Seals

- No Seals

S - Integral Seals at both ends

Bushing Options

- No Corrosion Resistance

CR - Corrosion Resistance

Specifications: **LBCH** & **LBOH** High Capacity Linear Bushings (self-aligning)

Operating Temperature

0° F to + 185° F

Maximum Speed

9.8 ft/sec (3m/sec)

Bushing Seals

Optional Internal Wiper Seals on both ends

Matching Shaft

Class L (**SL** series), hardened & ground shafting (see pages 42 - 43)

Corrosion Resistance

Electroless nickel plated load plates and stainless steel recirculating balls


Housing and Shaft Diameter Tolerances

C = clearance **P** = preload

Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance g6 (inches)	Recommended Housing Bore		Bushing and Shaft Fit-up (before adjustment)	
		Fixed Housing (inches)	Adjustable Housing (inches)	Fixed Housing (inches)	Adjustable Housing (inches)
0.750	-.0003 / -.0008	1.2505 / 1.2500	1.2510 / 1.2500	.0015C / .0000	.002C / .0000
1.000	-.0003 / -.0008	1.5630 / 1.5625	1.5635 / 1.5625	.0015C / .0000	.002C / .0000
1.250	-.0004 / -.0010	2.0008 / 2.0000	2.0010 / 2.0000	.0018C / .0001P	.002C / .0000
1.500	-.0004 / -.0010	2.3760 / 2.3750	2.3760 / 2.3750	.0021C / .0000	.0021C / .0000


Dimensions & Specifications: **LBCH** High Capacity Linear Bushing (closed)

Model Number		Nominal Shaft Diameter	Dyn. Load Capacity ⁽¹⁾	# of Ball circuits	Working Bore Diameter	Housing Bore D ⁽²⁾	Dimensions (inches)			Bearing Weight (lbs)
Without Seals	With Seals						A	B	C	
LBCH-12	-S	0.750	1,130	10	0.7500/0.7495	1.2505/1.2500	1.625/1.605	1.270/1.250	0.056	0.13
LBCH-16	-S	1.000	1,900	10	1.0000/0.9995	1.5630/1.5625	2.250/2.230	1.890/1.870	0.068	0.28
LBCH-20	-S	1.250	2,350	10	1.2500/1.2494	2.0008/2.0000	2.625/2.600	2.001/1.985	0.068	0.53
LBCH-24	-S	1.500	3,880	10	1.5000/1.4994	2.3760/2.3750	3.000/2.970	2.420/2.390	0.086	0.84

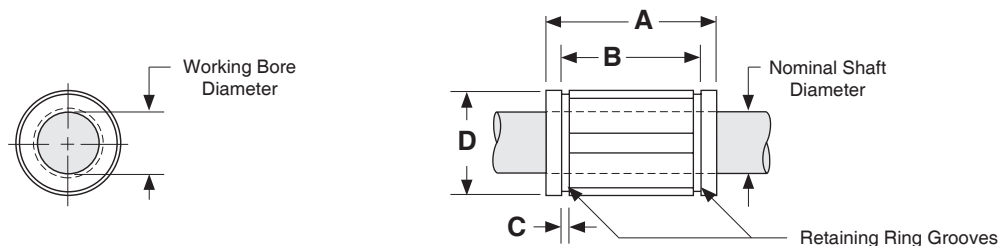

Dimensions & Specifications: **LBOH** High Capacity Linear Bushing (open)

Model Number Without Seals With Seals	Nominal Shaft Diameter (inches)	Dyn. ⁽¹⁾ Load Cap. (lbs)	# of Ball circuits	Working Bore Diameter (inches)	Housing Bore D (inches)	Dimensions (inches)				Retention Hole		Bearing Weight (lbs)
						A	B	C	E min.	F dia.	G (in)	
LBOH-12	-S	0.750	1,130	8	0.7500/0.7495	1.2505/1.2500	1.625/1.605	1.285/1.255	0.055	0.44	.14 .13	0.11
LBOH-16	-S	1.000	1,900	8	1.0000/0.9995	1.5630/1.5625	2.250/2.230	1.901/1.871	0.068	0.56	.14 .13	0.23
LBOH-20	-S	1.250	2,350	8	1.2500/1.2494	2.0008/2.0000	2.625/2.600	2.031/1.991	0.068	0.63	.20 .19	0.43
LBOH-24	-S	1.500	3,380	8	1.5000/1.4994	2.3760/2.3750	3.000/2.970	2.442/2.402	0.086	0.75	.20 .19	0.68

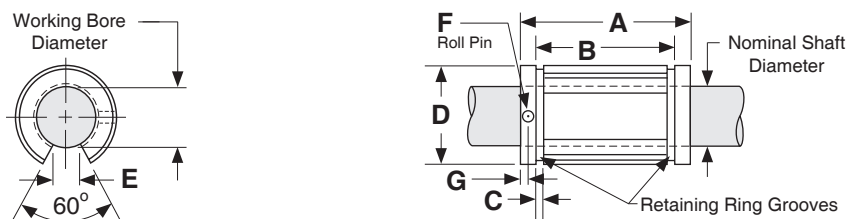

Footnotes:

- (1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bushing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C). The actual load rating, and life, is dependent upon factors detailed on pages 6 to 13.
- (2) This specification is based upon the bushing being on the shaft. Refer to page 42 for additional details.



LBCM - **16** - **S**

Linear Bushing Metric Asian

LBCM - Asian Super Metric Bushing Closed

LBOM - Asian Super Metric Bushing Open

Nominal Diameter

16 - 16 mm diameter

20 - 20 mm diameter

25 - 25 mm diameter

30 - 30 mm diameter

40 - 40 mm diameter

Bushing Seals

- No Seals

S - Integral Seals at both ends

Specifications: **LBCM** & **LBOM** Linear Bushings Metric (self-aligning)

Operating Temperature

-20° C to +80° C

Maximum Speed

3 meters/sec

Bushing Seals

Optional Internal Wiper Seals on both ends

Matching Shaft


Metric (**SM** series), hardened & ground shafting (see pages 44 - 45)

Housing and Shaft Diameter Tolerances

Nominal Shaft Diameter (mm)	Shaft Diameter Tolerance h6 (mm)	Recommended Housing Bore D (mm)	Housing Bore Tolerance H7 (mm)
16	0 / -0.011	26	+0.021 / 0
20	0 / -0.013	32	+0.025 / 0
25	0 / -0.013	40	+0.025 / 0
30	0 / -0.013	47	+0.025 / 0
40	0 / -0.016	62	+0.030 / 0


Dimensions & Specifications: **LBCM** Linear Bushing Closed Metric (Asian Style)

Model Number		Nominal Shaft Diameter (mm)	Dynamic Load Capacity ⁽¹⁾ (N)	Housing Bore D ⁽²⁾ (mm)	Dimensions (mm)			# of Ball Circuits	Bearing Weight (g)
Without Seals	With Seals				A	B	C		
LBCM-16	-S	16	1225	28	37	26,5	1,60	5	34
LBCM-20	-S	20	2303	32	42	30,5	1,60	6	58
LBCM-25	-S	25	4312	40	59	41,0	1,85	6	120
LBCM-30	-S	30	4802	45	64	44,5	1,85	6	148
LBCM-40	-S	40	9310	60	80	60,5	2,10	6	314

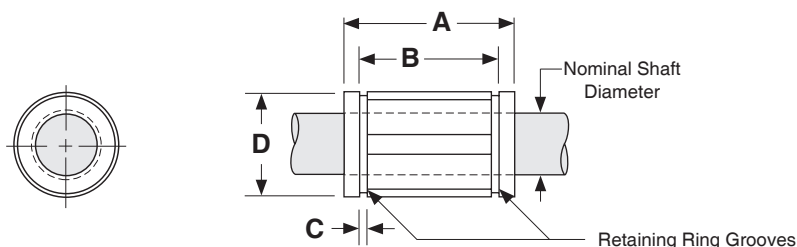

Dimensions & Specifications: **LBOM** Linear Bushing Open Metric (Asian Style)

Model Number		Nominal Shaft Diameter (mm)	Dynamic Load Capacity ⁽¹⁾ (N)	Housing Bore D ⁽²⁾ (mm)	Dimensions (mm)				Angle a	# of Ball Circuits	Bearing Weight (g)
Without Seals	With Seals				A	B	C	E min.			
LBOM-16	-S	16	1372	28	37	26,5	1,60	11,0	60°	4	26
LBOM-20	-S	20	2332	32	42	30,5	1,60	11,0	60°	5	48
LBOM-25	-S	25	4351	40	59	41,0	1,85	12,5	60°	5	100
LBOM-30	-S	30	4851	45	64	44,5	1,85	15,0	60°	5	122
LBOM-40	-S	40	9408	60	80	60,5	2,15	20,0	60°	5	262

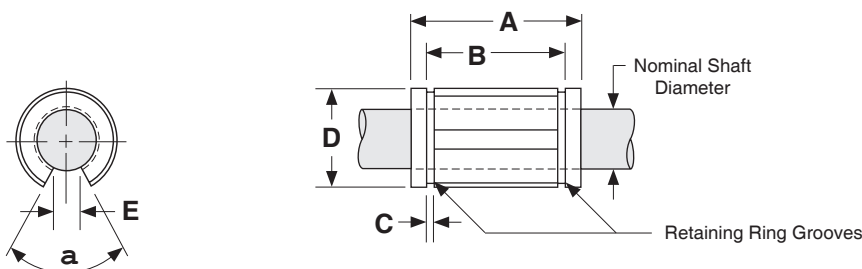

Footnotes:

- (1) Rating based upon 50 km of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C).
- (2) This specification is based upon the bearing being on the shaft.



LBCME - **20** - **S** - **CR**

Linear Bushing Metric European

LBCME - European Super Metric Bushing Closed

LBOME - European Super Metric Bushing Open

Nominal Diameter

- | | |
|----------------------------|----------------------------|
| 8 - 8 mm diameter | 25 - 25 mm diameter |
| 10 - 10 mm diameter | 30 - 30 mm diameter |
| 12 - 12 mm diameter | 40 - 40 mm diameter |
| 16 - 16 mm diameter | 50 - 50 mm diameter |
| 20 - 20 mm diameter | |

Bushing Seals

- No Seals
- S** - Integral Seals at both ends

Bushing Options


- No Corrosion Resistance
- CR** - Corrosion Resistance

Specifications: LBCME & LBOME Linear Bushings Metric (self-aligning)

Operating Temperature	-20° C to + 80° C		
Maximum Speed	3 meters/sec		
Bushing Seals	Optional Internal Wiper Seals on both ends		
Matching Shaft	Metric (SM series), hardened & ground shafting (see pages 44 - 45)		
Corrosion Resistance	Electroless nickel plated load plates and stainless steel recirculating balls		
Housing and Shaft Diameter Tolerances			
Nominal Shaft Diameter (mm)	Shaft Diameter Tolerance h6 (mm)	Recommended Housing Bore D (mm)	Housing Bore Tolerance H7 (mm)
8	0 / -0.009	16	+0.018 / 0
10	0 / -0.009	19	+0.021 / 0
12	0 / -0.011	22	+0.021 / 0
16	0 / -0.011	26	+0.021 / 0
20	0 / -0.013	32	+0.025 / 0
25	0 / -0.013	40	+0.025 / 0
30	0 / -0.013	47	+0.025 / 0
40	0 / -0.016	62	+0.030 / 0
50	0 / -0.016	75	+0.030 / 0


Dimensions & Specifications: LBCME Linear Bushing Closed Metric (European Style)

Model Number		Nominal Shaft Diameter (mm)	Dynamic Load Capacity (N)	Housing Bore D (mm)	Dimensions (mm)			# of Ball Circuits	Bearing Weight (g)
Without Seals	With Seals				A	B	C		
LBCME- 8	-S	8	423	16	25	16,5	1,10	4	7.3
LBCME-10	-S	10	750	19	29	22,0	1,30	5	14
LBCME-12	-S	12	1020	22	32	22,9	1,30	5	21
LBCME-16	-S	16	1250	26	36	24,9	1,30	5	43
LBCME-20	-S	20	2090	32	45	31,5	1,60	6	58
LBCME-25	-S	25	3780	40	58	44,1	1,85	6	123
LBCME-30	-S	30	5470	47	68	52,1	1,85	6	216
LBCME-40	-S	40	6590	62	80	60,6	2,15	6	333
LBCME-50	-S	50	10800	75	100	77,6	2,65	6	618

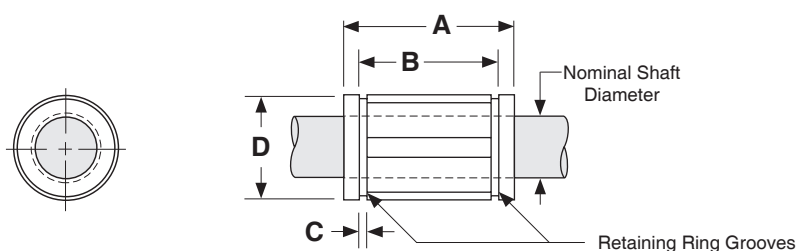

Dimensions & Specifications: LBOME Linear Bushing Open Metric (European Style)

Model Number		Nominal Shaft Diameter (mm)	Dynamic Load Capacity (N)	Housing Bore D (mm)	Dimensions (mm)				Angle a	# of Ball Circuits	Bearing Weight (g)
Without Seals	With Seals				A	B	C	E min.			
LBOME-12	-S	12	1020	22	32	22,9	1,30	6,5	66°	4	17
LBOME-16	-S	16	1250	26	36	24,9	1,30	9,0	68°	4	35
LBOME-20	-S	20	2090	32	45	31,5	1,60	9,0	55°	5	48
LBOME-25	-S	25	3780	40	58	44,1	1,85	11,5	57°	5	103
LBOME-30	-S	30	5470	47	68	52,1	1,85	14,0	57°	5	177
LBOME-40	-S	40	6590	62	80	60,6	2,15	19,5	56°	5	275
LBOME-50	-S	50	10800	75	100	77,6	2,65	22,5	54°	5	520

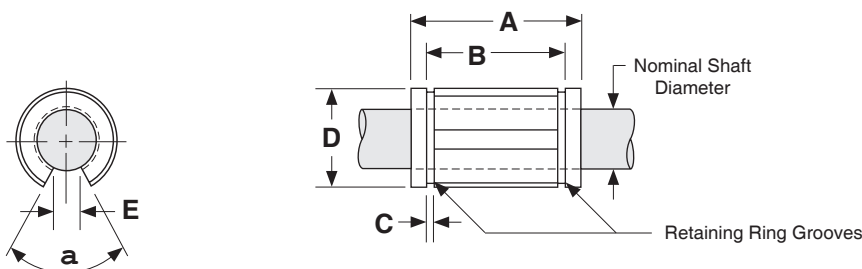

Footnotes:

- (1) Rating based upon 50 km of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C).
- (2) This specification is based upon the bearing being on the shaft.



SLBC - **10** - **CR** - **L**

Pillow Block Series

- SLBC** - One LBC bushing per pillow block
- DLBC** - Two LBC bushings per pillow block
- SLBO** - One LBO bushing per pillow block
- DLBO** - Two LBO bushings per pillow block

Nominal Diameter

- 8** - 0.500 inch diameter
- 10** - 0.625 inch diameter
- 12** - 0.750 inch diameter
- 16** - 1.000 inch diameter
- 20** - 1.250 inch diameter
- 24** - 1.500 inch diameter
- 32** - 2.000 inch diameter

Bearing Options

- Standard
- CR** - Corrosion Resistance

Bearing Lock



- None
- L** - Hand Wheel Lock

Specifications: **SLBC**, **SLBO**, **DLBC** & **DLBO** Pillow Blocks (self-aligning)

Bearing Housing Type & Finish	Aluminum 6061-T6 Pillow Block, Clear Anodized																
Bearing Seals	Internal Wiper Seals on Both Ends																
Corrosion Resistance	Electroless nickel plated load bushing plates and stainless steel recirculating balls																
Hand Wheel Lock	Optional Aluminum Shaft Clamping Block (see page 37)																
Operating Temperature	0° F to + 185° F																
Maximum Speed	9.8 ft/second (3m/sec)																
Matching Shaft	Class L (SL series), hardened & ground shafting (see pages 42 - 43)																
Diameter Tolerance	<table border="1"> <thead> <tr> <th>Nominal Shaft Diameter (inches)</th><th>Shaft Diameter Tolerance (inches)</th></tr> </thead> <tbody> <tr> <td>0.500</td><td>.4995 / .4990</td></tr> <tr> <td>0.625</td><td>.6245 / .6240</td></tr> <tr> <td>0.750</td><td>.7495 / .7490</td></tr> <tr> <td>1.000</td><td>.9995 / .9990</td></tr> <tr> <td>1.250</td><td>1.2495 / 1.2490</td></tr> <tr> <td>1.500</td><td>1.4994 / 1.4989</td></tr> <tr> <td>2.000</td><td>1.9994 / 1.9987</td></tr> </tbody> </table>	Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance (inches)	0.500	.4995 / .4990	0.625	.6245 / .6240	0.750	.7495 / .7490	1.000	.9995 / .9990	1.250	1.2495 / 1.2490	1.500	1.4994 / 1.4989	2.000	1.9994 / 1.9987
Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance (inches)																
0.500	.4995 / .4990																
0.625	.6245 / .6240																
0.750	.7495 / .7490																
1.000	.9995 / .9990																
1.250	1.2495 / 1.2490																
1.500	1.4994 / 1.4989																
2.000	1.9994 / 1.9987																



Dimensions & Specifications: **SLBC** Single Linear Bearing Closed Pillow Block (self-aligning)

Model Number	Nominal Shaft Diameter (inches)	Dyn. Load Capacity (lbs)	Dimensions (inches)											Block Weight (lbs)
			A	B	C	D	E	F	G	H	I	J		
			+/- .003				+/- .010	+/- .010					hole	bolt
SLBC-8	0.500	245	0.687	2.00	1.69	1.13	1.688	1.000	1.38	1.25	.25	.16	# 6	0.20
SLBC-10	0.625	430	0.875	2.50	1.94	1.44	2.125	1.125	1.75	1.63	.28	.19	# 8	0.50
SLBC-12	0.750	580	0.937	2.75	2.06	1.56	2.375	1.250	1.88	1.75	.31	.19	# 8	0.60
SLBC-16	1.000	980	1.187	3.25	2.81	1.94	2.875	1.750	2.38	2.19	.38	.22	#10	1.20
SLBC-20	1.250	1,460	1.500	4.00	3.63	2.50	3.500	2.000	3.00	2.81	.44	.22	#10	2.50
SLBC-24	1.500	1,830	1.750	4.75	4.00	2.88	4.125	2.500	3.50	3.25	.50	.28	1/4	3.80
SLBC-32	2.000	2,830	2.125	6.00	5.00	3.63	5.250	3.250	4.50	4.06	.63	.41	3/8	7.00

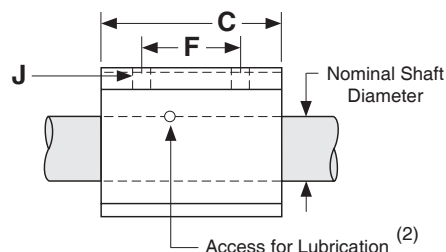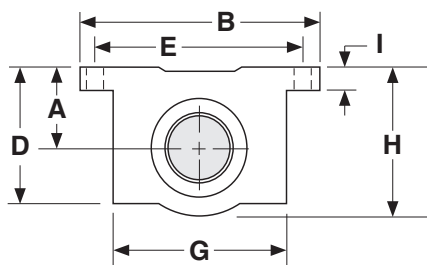

Dimensions & Specifications: **SLBO** Single Linear Bearing Open Pillow Block (self-aligning)

Model Number	Nominal Shaft Diameter (inches)	Dyn. ⁽¹⁾ Load Capacity (lbs)	Dimensions (inches)												Block Weight
			A +/- .003	B	C	D	E +/- .010	F +/- .010	G	H		I	J min.	K	(lbs)
										hole	bolt				
SLBO-8	0.500	230	0.687	2.00	1.50	1.13	1.688	1.000	0.69	.16	# 6	.25	0.31	0.75	0.20
SLBO-10	0.625	380	0.875	2.50	1.75	1.44	2.125	1.125	0.88	.19	# 8	.28	0.37	0.94	0.40
SLBO-12	0.750	470	0.937	2.75	1.88	1.56	2.375	1.250	0.94	.19	# 8	.31	0.43	1.00	0.50
SLBO-16	1.000	820	1.187	3.25	2.63	2.00	2.875	1.750	1.19	.22	#10	.38	0.56	1.25	1.00
SLBO-20	1.250	1,210	1.500	4.00	3.38	2.56	3.500	2.000	1.50	.22	#10	.44	0.62	1.63	2.10
SLBO-24	1.500	1,520	1.750	4.75	3.75	2.94	4.125	2.500	1.75	.28	1¼	.50	0.75	1.88	3.20
SLBO-32	2.000	2,410	2.125	6.00	4.75	3.63	5.250	3.250	2.25	.41	3⁄8	.63	1.00	2.44	6.00

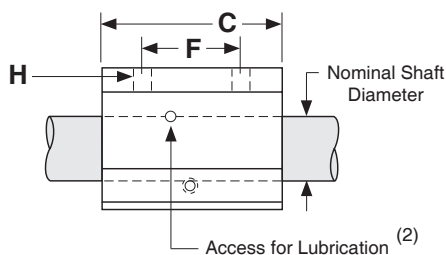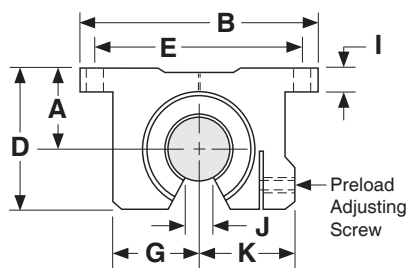



Footnotes:

(1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C). The actual load rating, and life, is dependent upon factors detailed on pages 6 to 13.

(2) Size 0.500 has oil lubricant fitting. Sizes 0.625 and above have a 1/4-28 UNF straight thread access for lubrication.



Dimensions & Specifications: **DLBC** Double Linear Bearing Closed Pillow Block (self-aligning)

Model Number	Nominal Shaft Diameter (inches)	Dyn. Load Capacity (lbs)	Dimensions (inches)											Block Weight (lbs)	
			A +/- .003	B	C	D	E +/- .010	F +/- .010	G	H	I	J			d ₂ ⁽³⁾
												hole	bolt		
DLBC-8	0.500	490	0.687	2.00	3.50	1.13	1.688	2.500	1.38	1.25	.25	.16	# 6	1.75	0.40
DLBC-10	0.625	860	0.875	2.50	4.00	1.44	2.125	3.000	1.75	1.63	.28	.19	# 8	2.00	1.00
DLBC-12	0.750	1,160	0.937	2.75	4.50	1.56	2.375	3.500	1.88	1.75	.31	.19	# 8	2.25	1.20
DLBC-16	1.000	1,960	1.187	3.25	6.00	1.94	2.875	4.500	2.38	2.19	.38	.22	#10	3.00	2.40
DLBC-20	1.250	2,920	1.500	4.00	7.50	2.50	3.500	5.500	3.00	2.81	.44	.22	#10	3.75	5.00
DLBC-24	1.500	3,660	1.750	4.75	9.00	2.88	4.125	6.500	3.50	3.25	.50	.28	¼	4.50	7.80
DLBC-32	2.000	5,660	2.125	6.00	10.00	3.63	5.250	8.250	4.50	4.06	.63	.41	⅜	5.75	14.50

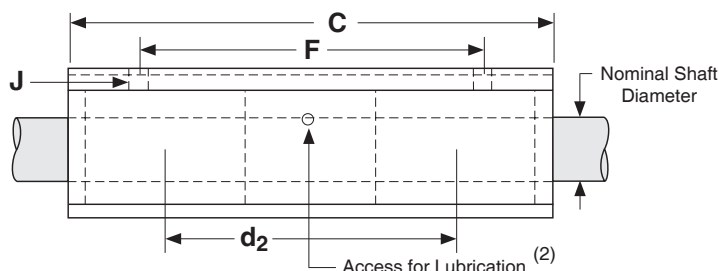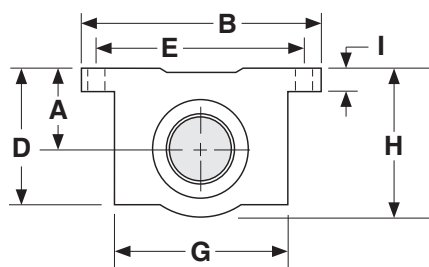

Dimensions & Specifications: **DLBO** Double Linear Bearing Pillow Block Open (self-aligning)

Model Number	Nominal Shaft Diameter (inches)	Dyn. Load Capacity (lbs) ⁽¹⁾	Dimensions (inches)													Block Weight (lbs)
			A +/- .003	B	C	D	E +/- .010	F +/- .010	G	H min.	I	J		K	d ₂ ⁽³⁾	
DLBO-8	0.500	460	0.687	2.00	3.50	1.13	1.688	2.500	0.69	.31	.25	.16	# 6	0.75	1.75	0.40
DLBO-10	0.625	760	0.875	2.50	4.00	1.44	2.125	3.000	0.88	.37	.28	.19	# 8	0.94	2.00	0.80
DLBO-12	0.750	940	0.937	2.75	4.50	1.56	2.375	3.500	0.94	.43	.31	.19	# 8	1.00	2.25	1.00
DLBO-16	1.000	1,640	1.187	3.25	6.00	2.00	2.875	4.500	1.19	.56	.38	.22	#10	1.25	3.00	2.00
DLBO-20	1.250	2,420	1.500	4.00	7.50	2.56	3.500	5.500	1.50	.62	.44	.22	#10	1.63	3.75	4.20
DLBO-24	1.500	3,040	1.750	4.75	9.00	2.94	4.125	6.500	1.75	.75	.50	.28	1/4	1.88	4.50	6.70
DLBO-32	2.000	4,820	2.125	6.00	10.00	3.63	5.250	8.250	2.25	1.00	.63	.41	3/8	2.44	5.75	12.75

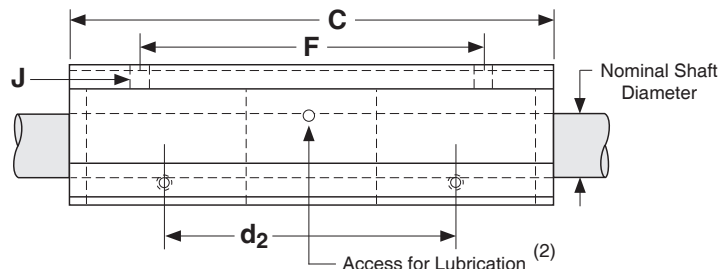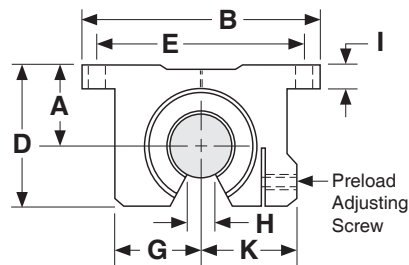

Footnotes:

(1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C). The actual load rating, and life, is dependent upon factors detailed on pages 6 to 13.

(2) Size 0.500 has oil lubricant fitting. Sizes 0.625 and above have a 1/4-28 UNF straight thread access for lubrication.

(3) This value is the center to center distance (spacing) of the bearings on a single shaft (d₂).

TWIN RAIL® Carriage Assembly series

TRCA - Plate with mounted SLBO or DLBO

Nominal Bearing Diameter

8 - 0.500 inch diameter 20 - 1.250 inch diameter
 10 - 0.625 inch diameter 24 - 1.500 inch diameter
 12 - 0.750 inch diameter 32 - 2.000 inch diameter
 16 - 1.000 inch diameter

Carriage Plate Length

6 - 6 inches 18 - 18 inches
 8 - 8 inches 24 - 24 inches
 12 - 12 inches 30 - 30 inches

Bearing Options


- Standard
CR - Corrosion Resistance

Carriage Plate Mounting

- No Holes
P - Pre-Machined Mounting Holes

Bearing Lock

- None
Lx - Hand Wheel Locks (x = number of locks - 1, 2, 3 or 4)

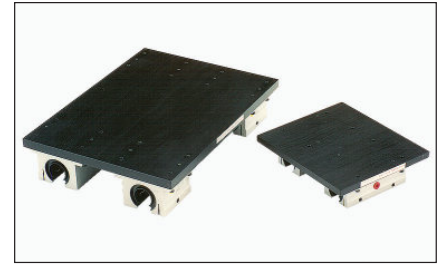

Specifications: **TRCA** TWIN RAIL® Carriage Assembly

Bearing Housing Type & Finish	Aluminum 6061-T6 Pillow Block, Clear Anodized	
Bearing Seals	Internal Wiper Seals on Both Ends	
Corrosion Resistance	Corrosion Resistant linear bushings and stainless steel mounting hardware	
Hand Wheel Locks	Optional Aluminum Shaft Clamping Blocks (see page 37)	
Carriage Plate Type & Finish	Machined Aluminum 6061-T6 Plate, Black Anodized	
Bearing Alignment on Plate	±0.001", Pillow Blocks Doweled to Carriage Plate	
Carriage Plate Machining	Optional Pre-Machined Mounting Holes (see page 36)	
Operating Temperature	0° F to +185° F	
Maximum Speed	9.8 ft/second (3m/sec)	
Matching Shaft Assembly	TRSA series (see page 51)	
Diameter Tolerance	Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance (inches)
	0.500	.4995 / .4990
	0.625	.6245 / .6240
	0.750	.7495 / .7490
	1.000	.9995 / .9990
	1.250	1.2495 / 1.2490
	1.500	1.4994 / 1.4989
	2.000	1.9994 / 1.9987

Dimensions & Specifications: **TRCA TWIN RAIL®** Carriage Assembly

Model Number	Nom. Shaft Dia. (inches)	Dyn. Load Cap. (lbs)	Dimensions (inches)													Assembly Weight (lbs)
			A +/- .005	B +/- .005	C	D	E	F	G	H	J	K	d _r ⁽²⁾	d ₁ ⁽³⁾	d ₂ ⁽⁴⁾	
TRCA8-6	0.500	920	6.00	5.50	1.25	0.75	0.68	1.12	2.00	.25	3.50	0.375	1.062	3.00	1.90	2.4
TRCA8-12	0.500	920	12.00	5.50	0.25	0.75	0.68	1.12	2.00	.25	11.50	0.375	1.062	3.00	10.00	4.6
TRCA8-18	0.500	920	18.00	5.50	0.25	0.75	0.68	1.12	2.00	.25	17.50	0.375	1.062	3.00	16.00	5.9
TRCA10-6	0.625	1,520	6.00	6.75	1.00	0.93	0.87	1.43	2.50	.25	4.00	0.375	1.250	3.75	2.15	3.5
TRCA10-12	0.625	1,520	12.00	6.75	0.25	0.93	0.87	1.43	2.50	.25	11.50	0.375	1.250	3.75	9.75	6.0
TRCA10-18	0.625	1,520	18.00	6.75	0.25	0.93	0.87	1.43	2.50	.25	17.50	0.375	1.250	3.75	15.75	7.7
TRCA12-6	0.750	1,880	6.00	7.75	0.75	1.00	0.93	1.56	2.75	.25	4.50	0.500	1.437	4.50	2.50	4.8
TRCA12-12	0.750	1,880	12.00	7.75	0.25	1.00	0.93	1.56	2.75	.25	11.49	0.500	1.437	4.50	9.62	8.2
TRCA12-18	0.750	1,880	18.00	7.75	0.25	1.00	0.93	1.56	2.75	.25	17.49	0.500	1.437	4.50	15.62	10.7
TRCA16-6	1.000	3,280	6.00	9.00	0.00	1.25	1.18	2.00	3.25	.25	6.00	0.500	1.687	5.25	3.25	7.2
TRCA16-12	1.000	3,280	12.00	9.00	0.25	1.25	1.18	2.00	3.25	.25	11.49	0.500	1.687	5.25	8.87	11.0
TRCA16-18	1.000	3,280	18.00	9.00	0.25	1.25	1.18	2.00	3.25	.25	17.49	0.500	1.687	5.25	14.87	14.0
TRCA16-24	1.000	3,280	24.00	9.00	0.25	1.25	1.18	2.00	3.25	.25	23.49	0.500	1.687	5.25	20.87	16.9
TRCA20-8	1.250	4,840	8.00	10.50	0.25	1.62	1.50	2.56	4.00	.25	7.50	0.750	2.250	6.00	3.90	16.0
TRCA20-12	1.250	4,840	12.00	10.50	0.25	1.62	1.50	2.56	4.00	.25	11.49	0.750	2.250	6.00	8.12	16.4
TRCA20-18	1.250	4,840	18.00	10.50	0.25	1.62	1.50	2.56	4.00	.25	17.49	0.750	2.250	6.00	14.12	21.6
TRCA20-24	1.250	4,840	24.00	10.50	0.25	1.62	1.50	2.56	4.00	.25	23.49	0.750	2.250	6.00	20.12	26.8
TRCA24-12	1.500	6,080	12.00	12.00	1.50	1.87	1.75	2.93	4.75	.31	9.00	1.000	2.750	6.62	5.00	30.0
TRCA24-18	1.500	6,080	18.00	12.00	0.25	1.87	1.75	2.93	4.75	.31	17.50	1.000	2.750	6.62	13.75	40.2
TRCA24-24	1.500	6,080	24.00	12.00	0.25	1.87	1.75	2.93	4.75	.31	23.50	1.000	2.750	6.62	19.75	48.1
TRCA24-30	1.500	6,080	30.00	12.00	0.25	1.87	1.75	2.93	4.75	.31	29.50	1.000	2.750	6.62	25.75	56.0
TRCA32-18	2.000	9,640	18.00	14.00	0.25	2.43	2.25	3.62	6.00	.37	17.50	1.250	3.375	7.25	12.75	61.7
TRCA32-24	2.000	9,640	24.00	14.00	0.25	2.43	2.25	3.62	6.00	.37	23.50	1.250	3.375	7.25	18.75	73.2
TRCA32-30	2.000	9,640	30.00	14.00	0.25	2.43	2.25	3.62	6.00	.37	29.50	1.250	3.375	7.25	24.75	84.8

Footnotes:



- (1) Rating based upon 2 million inches of travel with the load forces being applied downward on the linear bearing, while in a horizontal application, and based upon 1060 steel shafting (Rockwell 60C). The actual load rating, and life, is dependent upon factors detailed on pages 6 to 13.
- (2) This value is the center distance of the bearing to the top of the carriage plate surface (d_r).
- (3) This value is the center to center distance (spread) between the rails (d₁).
- (4) This value is the center to center distance (spacing) of the bearings on a single shaft (d₂).

Dimensions

(inches)



Available For:

TRCA8-6, TRCA10-6, TRCA12-6,
TRCA16-6, TRCA20-8, TRCA24-12

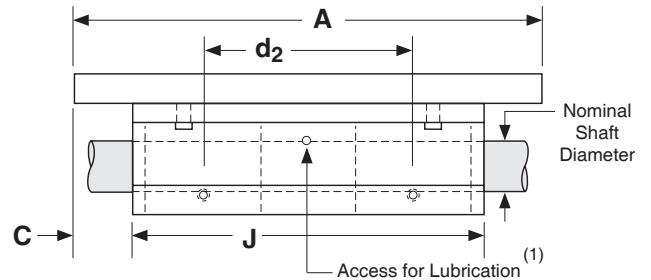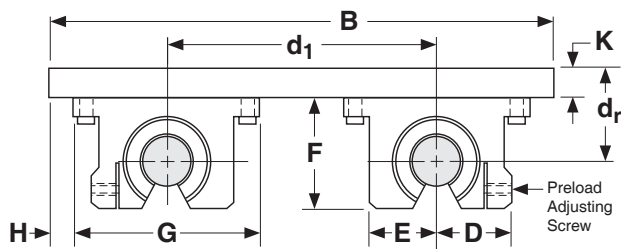

Available For:

All other TRCA models,
not shown above

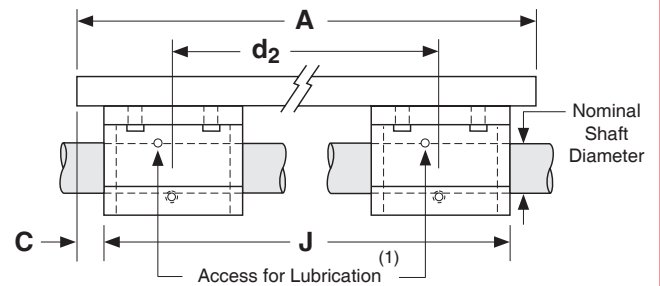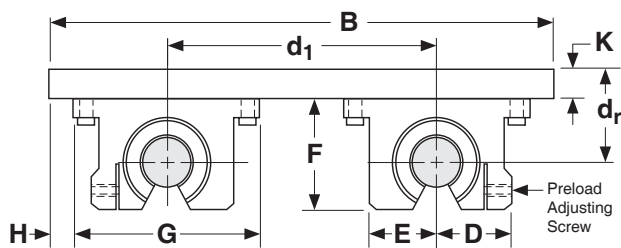


Footnotes:

(1) Size 0.500 has oil lubricant fitting. Sizes 0.625 and above have a 1/4-28 UNF straight thread access for lubrication.

(- P) Pre-Machined Carriage Mounting Holes

All carriage assembly plates are available with a pre-determined number & location of mounting holes. These holes consist of stainless steel threaded inserts per the below chart. Custom mounting patterns are available upon request.

Model Number	Carriage Length (inches)	L (inches)	Threaded Insert Size
TRCA8-6-P	6.00	5.00	#10-32
TRCA8-12-P	12.00	5.00	#10-32
TRCA8-18-P	18.00	5.00	#10-32
TRCA10-6-P	6.00	5.00	#10-32
TRCA10-12-P	12.00	5.00	#10-32
TRCA10-18-P	18.00	5.50	#10-32
TRCA12-6-P	6.00	5.00	1/4-28
TRCA12-12-P	12.00	5.00	1/4-28
TRCA12-18-P	18.00	5.50	1/4-28
TRCA16-6-P	6.00	5.00	5/16-24
TRCA16-12-P	12.00	5.00	5/16-24
TRCA16-18-P	18.00	5.00	5/16-24
TRCA16-24-P	24.00	5.00	5/16-24
TRCA20-8-P	8.00	7.00	3/8-24
TRCA20-12-P	12.00	5.00	3/8-24
TRCA20-18-P	18.00	5.00	3/8-24
TRCA20-24-P	24.00	5.00	3/8-24
TRCA24-12-P	12.00	5.00	3/8-24
TRCA24-18-P	18.00	5.00	3/8-24
TRCA24-24-P	24.00	5.00	3/8-24
TRCA24-30-P	30.00	5.25	3/8-24
TRCA32-18-P	18.00	5.00	1/2-20
TRCA32-24-P	24.00	5.00	1/2-20
TRCA32-30-P	30.00	5.25	1/2-20

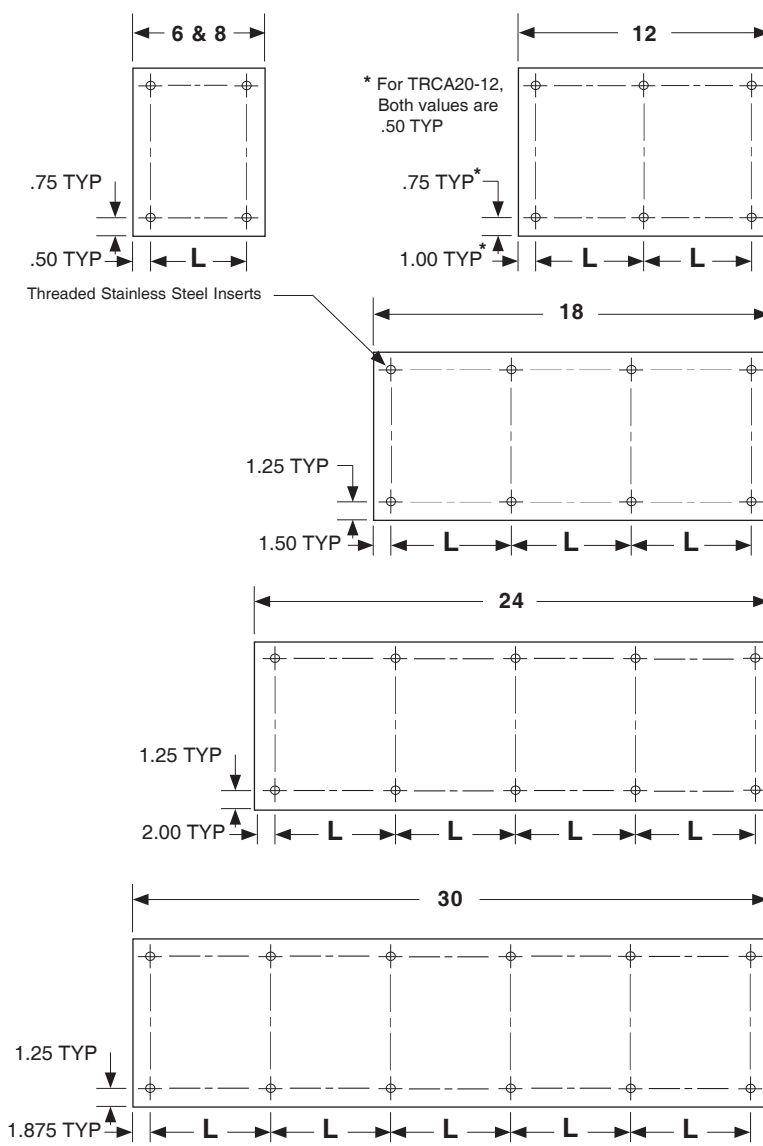


Options

(- L) Hand Wheel Lock

This option adds an aluminum clamping block to the end of a pillow block, which then provides for a manual lock of the bearing to the shaft. The threaded hand wheel shaft presses into a bronze insert which makes contact to provide a "pressure lock" to the shaft. The threaded steel screw will not back drive and does not make physical contact with the steel shaft (no steel to steel contact). The lock will be installed as shown below when ordered with a SLBC, SLBO, DLBC, DLBO, or TRCA series. Multiple locks can be installed onto a TRCA assembly.

Nominal Shaft Diameter (inches)	Dimensions (inches)						
	A	B	C	D	E		F
					open	closed	
8 - 0.500	1.680	1.72	2.00	0.50	.56	.44	2.00
10 - 0.625	1.875	1.53	2.00	0.50	.50	.31	2.50
12 - 0.750	2.067	1.46	2.00	0.50	.37	.18	2.75
16 - 1.000	2.312	1.34	2.00	0.50	.19	---	3.25
20 - 1.250	3.125	1.66	2.50	0.75	.17	---	4.00
24 - 1.500	3.625	1.46	2.50	0.75	.05	---	4.75
32 - 2.000	4.600	1.45	2.50	0.75	---	---	6.00

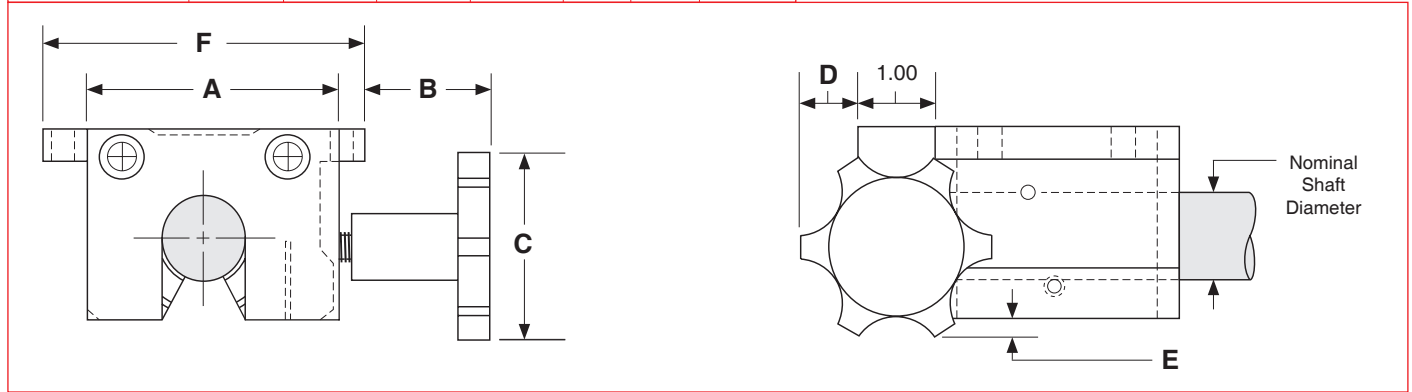

Custom Carriage Sizes

Custom carriage sizes that need to be wider, or longer than shown in this catalog can be provided upon request. This will allow for larger rail and bearing spacing (d_1 & d_2 dimensions).

Custom Carriage Material & Finishes

The standard carriage material is aluminum with a black anodized finish. Aluminum plates can be finished in many different colors, while steel carriage plates can be provided with a black oxide finish. Many other custom alternatives for carriage plates are available.

Special Grease Options

Bearings can be supplied with special greases, or lubricants, in order to meet the environmental requirements of the application. Examples of operating environments which may require a special lubricant include: high or low temperature, clean rooms, vacuums and food grade applications.

SLBCM Series

Single Self-Aligning Closed



SLBCM-A Series

Single Self-Aligning Closed Adjustable



SLBOM Series

Single Self-Aligning Open



DLBCM Series

Double Self-Aligning Closed



SLBCME Series

Single Self-Aligning Closed



SLBCME-A Series

Single Self-Aligning Closed Adjustable



SLBOME Series

Single Self-Aligning Open



SLBOME-A Series

Single Self-Aligning Open Adjustable



DLBCME Series

Double Self-Aligning Closed



DLBCME-A Series

Single Self-Aligning Closed Adjustable



DLBOME Series

Double Self-Aligning Open



DLBOME-A Series

Double Self-Aligning Open Adjustable



Shafting, Shaft Supports and Shaft Assembly Products

Precision Linear Shafting _____	42 - 45
Shaft Supports _____	46 - 49
SA series _____	52 - 59
TRSA series _____	60 - 67
Options _____	68 - 69





SL **12** - **SS** - **PD** x **105.375**

Shafting _____

SL - Class L diameter tolerance
SS - Class S diameter tolerance
SN - Class N diameter tolerance

Shaft Diameter _____

4 - 0.250 inch diameter
6 - 0.375 inch diameter
8 - 0.500 inch diameter
10 - 0.625 inch diameter
12 - 0.750 inch diameter
16 - 1.000 inch diameter
20 - 1.250 inch diameter
24 - 1.500 inch diameter
32 - 2.000 inch diameter

Shaft Material _____

- 1060 Steel
SS - 440C Stainless Steel (not available in class N)
CR - Chrome Plated 1060 Steel

Pre-Drilled _____

- No mounting hole pattern
PD - pre-drilled hole pattern

Overall Length _____


xxx.xxx - inches for all series

Specifications: SL, SS & SN Inch Precision Linear Shafting

Shaft Straightness	0.001/0.002 in/ft, cumulative				
Shaft Type	1060 Steel or 440C Stainless steel (only with L & S tolerance)				
Shaft Roundness	0.000080 inches				
Shaft Chamfer	For 0.25 - 0.75 inch dia. : 0.03 inch x 45°, For 1.00 - 2.00 inch dia. : 0.06 inch x 45°				
Surface Finish	8 R _a microinch				
Diameter Tolerance					
Hardness Depth					
	Nominal Shaft Diameter (inches)	Class L Diameter Tolerance (inches)	Class S Diameter Tolerance (inches)	Class N Diameter Tolerance (inches)	Minimum Hardness Depth (inches)
	0.250	.2495 / .2490	.2490 / .2485	.2500 / .2498	0.027
	0.375	.3745 / .3740	.3740 / .3735	.3750 / .3748	0.027
	0.500	.4995 / .4990	.4990 / .4985	.5000 / .4998	0.040
	0.625	.6245 / .6240	.6240 / .6235	.6250 / .6248	0.040
	0.750	.7495 / .7490	.7490 / .7485	.7500 / .7498	0.060
	1.000	.9995 / .9990	.9990 / .9985	1.0000 / .9998	0.080
	1.250	1.2495 / 1.2490	1.2490 / 1.2485	1.2500 / 1.2498	0.080
	1.500	1.4994 / 1.4989	1.4989 / 1.4984	1.5000 / 1.4997	0.080
	2.000	1.9994 / 1.9987	1.9987 / 1.9980	2.0000 / 1.9997	0.100

Dimensions & Specifications: SL, SS & SN Inch Precision Linear Shafting

Model Number	Nominal Shaft Diameter (inches)	Maximum Length					Shaft Weight (lbs/in)
		SL (inches)		SS (inches)		SN (inches)	
		-SS		-SS			
Sx4	0.250	94	94	94	94	94	0.014
Sx6	0.375	166	178	166	178	166	0.031
Sx8	0.500	166	178	166	178	166	0.055
Sx10	0.625	202	178	202	178	202	0.086
Sx12	0.750	202	178	202	178	202	0.125
Sx16	1.000	202	178	202	178	202	0.222
Sx20	1.250	202	178	202	178	202	0.348
Sx24	1.500	202	178	202	178	202	0.500
Sx32	2.000	202	178	202	178	202	0.890

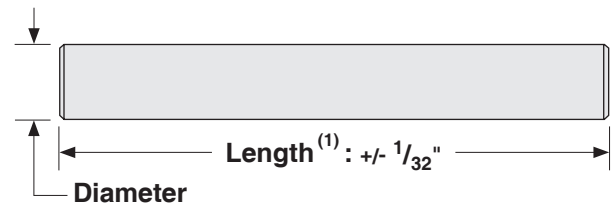


(1) Length tolerance for 2" diameter shafting is +/- 1/16 inches. Tighter tolerance available. Contact the factory.

⌞ L - class L, S - class S, N - class N

Dimensions & Specifications: SL-PD Inch Precision Linear Shafting

Model Number	Nominal Shaft Diameter (inches)	Maximum Length		Pre-Drilled Holes (inches)			Shaft Weight (lbs/in)
		(inches) -SS		A +/- .016	B	G	
SL8-PD	0.500	166	178	2.00	4.00	#6-32	0.055
SL10-PD	0.625	202	178	2.00	4.00	#8-32	0.086
SL12-PD	0.750	202	178	3.00	6.00	#10-32	0.125
SL16-PD	1.000	202	178	3.00	6.00	1/4-20	0.222
SL20-PD	1.250	202	178	3.00	6.00	5/16-18	0.348
SL24-PD	1.500	202	178	4.00	8.00	3/8-16	0.500
SL32-PD	2.000	202	178	4.00	8.00	1/2-13	0.890

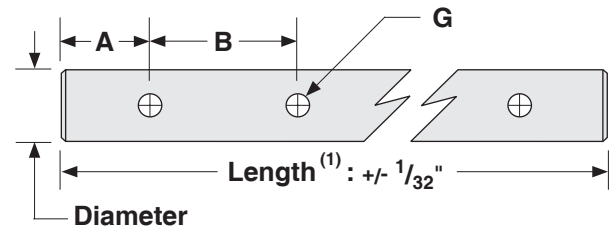

(1) Length tolerance for 2" diameter shafting is +/- 1/16 inches. Tighter tolerance available. Contact the factory.



SM **12** - **CR** x **105.375**

Shafting _____
SM - Metric diameter

Shaft Diameter _____
8 - 8 mm diameter
10 - 10 mm diameter
12 - 12 mm diameter
16 - 16 mm diameter
20 - 20 mm diameter
25 - 25 mm diameter
30 - 30 mm diameter
40 - 40 mm diameter
50 - 50 mm diameter


Shaft Material _____
 - 1060 Steel
SS - 440C Stainless Steel
CR - Chrome Plated 1060 Steel


Overall Length _____
xxx.xxx - inches for all series

Specifications: **SM** Metric Precision Shafting

Shaft Straightness	0,0254/0,0508 mm/300 mm - cumulative																																
Shaft Type	1060 Steel or 440C Stainless Steel																																
Shaft Roundness	0,0020 mm																																
Shaft Chamfer	For 8 - 20 mm dia. : 0,762 mm x 45°, For 25 - 50 mm dia. : 1,524 mm inch x 45°																																
Surface Finish	8 R _a microinch																																
Diameter Tolerance	<table><tr><th>Nominal Shaft Diameter (mm)</th><th>Diameter Tolerance (mm)</th><th>Minimum Hardness Depth (mm)</th></tr><tr><td>8</td><td>8,00 / 7,99</td><td>0,69</td></tr><tr><td>10</td><td>10,00 / 9,99</td><td>0,69</td></tr><tr><td>12</td><td>12,00 / 11,99</td><td>1,02</td></tr><tr><td>16</td><td>16,00 / 15,99</td><td>1,02</td></tr><tr><td>20</td><td>20,00 / 19,99</td><td>1,52</td></tr><tr><td>25</td><td>25,00 / 24,99</td><td>2,03</td></tr><tr><td>30</td><td>30,00 / 29,99</td><td>2,03</td></tr><tr><td>40</td><td>40,00 / 39,99</td><td>2,03</td></tr><tr><td>50</td><td>50,00 / 49,98</td><td>2,54</td></tr></table>			Nominal Shaft Diameter (mm)	Diameter Tolerance (mm)	Minimum Hardness Depth (mm)	8	8,00 / 7,99	0,69	10	10,00 / 9,99	0,69	12	12,00 / 11,99	1,02	16	16,00 / 15,99	1,02	20	20,00 / 19,99	1,52	25	25,00 / 24,99	2,03	30	30,00 / 29,99	2,03	40	40,00 / 39,99	2,03	50	50,00 / 49,98	2,54
Nominal Shaft Diameter (mm)				Diameter Tolerance (mm)	Minimum Hardness Depth (mm)																												
8				8,00 / 7,99	0,69																												
10				10,00 / 9,99	0,69																												
12				12,00 / 11,99	1,02																												
16				16,00 / 15,99	1,02																												
20				20,00 / 19,99	1,52																												
25				25,00 / 24,99	2,03																												
30				30,00 / 29,99	2,03																												
40				40,00 / 39,99	2,03																												
50				50,00 / 49,98	2,54																												
Hardness Depth																																	

Dimensions & Specifications: **SM** Metric Shafting

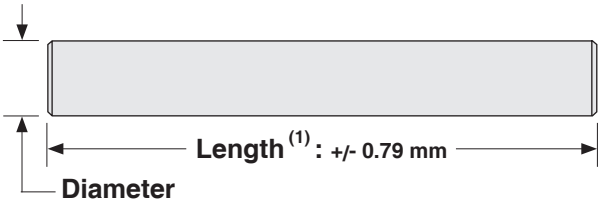Model Number	Nominal Shaft Diameter (mm)	Maximum Length inches (mm)		Shaft Weight (lbs/in)	 <p>(1) Tighter tolerance available. Contact the factory.</p>
SM8	8	166 (4216)	178 (4521)	0.022	
SM10	10	166 (4216)	178 (4521)	0.038	
SM12	12	166 (4216)	178 (4521)	0.050	
SM16	16	202 (5131)	178 (4521)	0.088	
SM20	20	202 (5131)	178 (4521)	0.138	
SM25	25	202 (5131)	178 (4521)	0.216	
SM30	30	202 (5131)	178 (4521)	0.311	
SM40	40	202 (5131)	178 (4521)	0.553	
SM50	50	202 (5131)	178 (4521)	0.864	

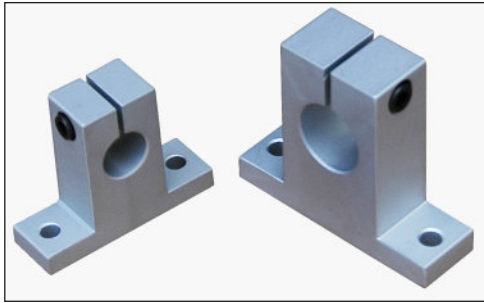

ES 12 - A

End Support Block

Shaft Diameter

- 8** - 0.500 inch diameter
- 10** - 0.625 inch diameter
- 12** - 0.750 inch diameter
- 16** - 1.000 inch diameter
- 20** - 1.250 inch diameter
- 24** - 1.500 inch diameter
- 32** - 2.000 inch diameter



Support Material


A - Aluminum

Dimensions & Specifications: **ES-A** End Shaft Support Block

Model Number	Nominal Shaft Diameter (inches)	Dimensions (inches)									Support Weight (lbs)
		A +/- .001	B	C	D	E +/- .010	F	H	M		
									hole	bolt size	
ES8-A	0.500	1.000	2.000	0.875	.250	1.500	0.625	1.625	.188	#8	.08
ES10-A	0.625	1.000	2.500	1.000	.313	1.875	0.688	1.750	.218	#10	.11
ES12-A	0.750	1.250	2.500	1.250	.313	2.000	0.750	2.063	.218	#10	.16
ES16-A	1.000	1.500	3.063	1.500	.375	2.500	1.000	2.500	.281	1/4	.30
ES20-A	1.250	1.750	3.750	2.000	.438	3.000	1.125	3.000	.346	5/16	.53
ES24-A	1.500	2.000	4.375	2.250	.500	3.500	1.250	3.437	.346	5/16	.73
ES32-A	2.000	2.500	5.500	3.000	.625	4.500	1.500	4.500	.406	3/8	1.40

Material: 6061-T6 aluminum
Finish: natural finish

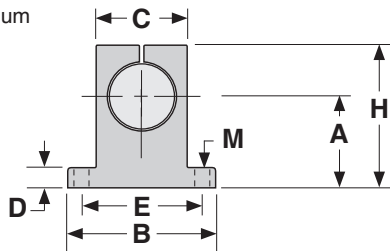


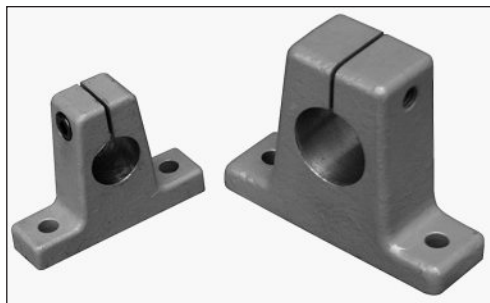


ES 12 - S
End Support Block _____
Shaft Diameter _____
 8 - 0.500 inch diameter
 10 - 0.625 inch diameter
 12 - 0.750 inch diameter
 16 - 1.000 inch diameter
 20 - 1.250 inch diameter
 24 - 1.500 inch diameter
 32 - 2.000 inch diameter
Support Material _____
 S - Steel

Dimensions & Specifications: **ES-S** End Shaft Support Block

Model Number	Nominal Shaft Diameter (inches)	Dimensions (inches)									Support Weight (lbs)
		A +/- .001	B	C	D	E +/- .010	F	H	M		
									hole	bolt size	
ES8-S	0.500	1.000	2.000	0.750	.250	1.500	0.625	1.625	.218	#10	.28
ES10-S	0.625	1.000	2.500	0.875	.312	1.875	0.750	1.750	.218	#10	.36
ES12-S	0.750	1.250	2.750	1.000	.375	2.000	0.750	2.125	.281	1/4	.53
ES16-S	1.000	1.500	3.312	1.375	.375	2.500	1.000	2.625	.281	1/4	1.00
ES20-S	1.250	1.750	4.000	1.750	.438	3.000	1.250	3.000	.343	5/16	2.10
ES24-S	1.500	2.000	4.750	2.000	.500	3.500	1.250	3.500	.343	5/16	2.80
ES32-S	2.000	2.500	6.000	2.625	.625	4.500	1.500	4.500	.406	3/8	5.10

Material: C1045 steel
Finish: blue enamel

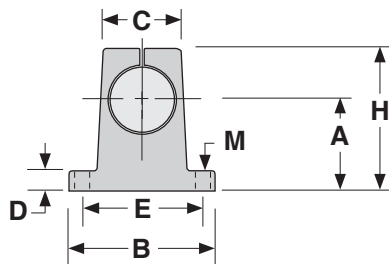



ARS 12 - PD - 24

Aluminum Rail Support

Shaft Diameter Supported

- 8** - 0.500 inch diameter
- 10** - 0.625 inch diameter
- 12** - 0.750 inch diameter
- 16** - 1.000 inch diameter
- 20** - 1.250 inch diameter
- 24** - 1.500 inch diameter
- 32** - 2.000 inch diameter

Pre-Drilled



- No mounting hole pattern
- PD** - pre-drilled hole pattern

Support length

- 24** - 24 inch length

Dimensions & Specifications: **ARS-PD** Shaft Support

Model Number		Nominal Shaft Diameter (inches)	Dimensions (inches)									Support Weight (lbs/in)
Without Holes	With Predrilled Holes		A +/- .002	B	C	D	E +/- .010	F hole	G bolt size	H	I	
ARS8	ARS8-PD	0.500	1.125	1.500	.250	.187	1.000	.169	#6-32 x 0.87	2.00	4.00	.050
ARS10	ARS10-PD	0.625	1.125	1.625	.312	.250	1.125	.193	#8-32 x 0.87	2.00	4.00	.063
ARS12	ARS12-PD	0.750	1.500	1.750	.375	.250	1.250	.221	#10-32 x 1.25	3.00	6.00	.083
ARS16	ARS16-PD	1.000	1.750	2.125	.500	.250	1.500	.281	1/4-20 x 1.50	3.00	6.00	.108
ARS20	ARS20-PD	1.250	2.125	2.500	.562	.312	1.875	.343	5/16-18 x 1.75	3.00	6.00	.146
ARS24	ARS24-PD	1.500	2.500	3.000	.687	.375	2.250	.406	3/8-16 x 2.00	4.00	8.00	.213
ARS32	ARS32-PD	2.000	3.250	3.750	.875	.500	2.750	.531	1/2-13 x 3.25	4.00	8.00	.342

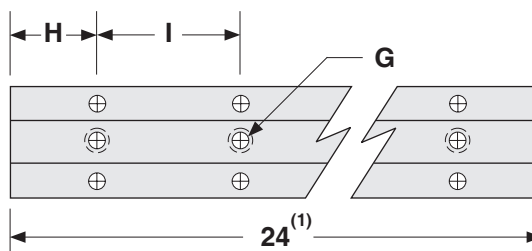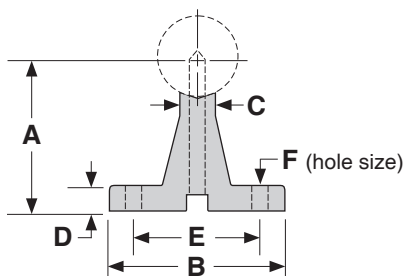

Material: 6061-T6 aluminum
Finish: natural finish

Shorter lengths available. Contact the factory.



LSRS 12 - PD - 48

Low Profile Steel Rail Support

Shaft Diameter Supported

- 8** - 0.500 inch diameter
- 10** - 0.625 inch diameter
- 12** - 0.750 inch diameter
- 16** - 1.000 inch diameter
- 20** - 1.250 inch diameter
- 24** - 1.500 inch diameter
- 32** - 2.000 inch diameter

Pre-Drilled



- No mounting hole pattern
- PD** - pre-drilled hole pattern

Support length

- 48** - 48 inch length

Dimensions & Specifications: **LSRS-PD** Shaft Support

Model Number	Without Holes	With Pre-drilled Holes	Nominal Shaft Diameter (inches)	Dimensions (inches)						Support Weight (lbs/in)
				A +/- .002	B	C	G hole bolt size	H	I	
LSRS8		LSRS8-PD	0.500	0.562	0.37	.341	.169 #6-32	2.00	4.00	.028
LSRS10		LSRS10-PD	0.625	0.687	0.45	.412	.193 #8-32	2.00	4.00	.041
LSRS12		LSRS12-PD	0.750	0.750	0.51	.420	.221 #10-32	3.00	6.00	.047
LSRS16		LSRS16-PD	1.000	1.000	0.69	.560	.281 1/4-20	3.00	6.00	.089
LSRS20		LSRS20-PD	1.250	1.187	0.78	.626	.343 5/16-18	3.00	6.00	.106
LSRS24		LSRS24-PD	1.500	1.375	0.93	.703	.406 3/8-16	4.00	8.00	.140
LSRS32		LSRS32-PD	2.000	1.750	1.18	.845	.531 1/2-13	4.00	8.00	.230

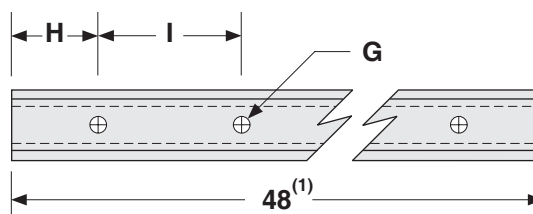

Material: AISI C-1018 steel
Finish: natural finish

Shorter lengths available. Contact the factory.



TRSA **12** - **6** - **SS** - **E4**

Assembly Type

- SA** - Single Rail Shaft Assembly
- TRSA** - *TWIN RAIL®* Shaft Assembly

Shaft Diameter

- 8** - 0.500 inch diameter
- 10** - 0.625 inch diameter
- 12** - 0.750 inch diameter
- 16** - 1.000 inch diameter
- 20** - 1.250 inch diameter
- 24** - 1.500 inch diameter
- 32** - 2.000 inch diameter

Overall Length

- xxx** - inches

Shaft Material

- 1060 Steel
- SS** - 440C Stainless Steel
- CR** - Chrome Plated 1060 Steel

End Stops

- No end stops
- E1** - One end stop
- E2** - Two end stops
- E3** - Three end stops
- E4** - Four end stops

Specifications: **SA & TRSA** Shaft Assemblies

Support Type & Finish	Precision Machined 6061-T6 Aluminum, Black Anodized																										
Shaft Straightness	0.001/0.002 in/ft, cumulative																										
Shaft Parallelism (TRSA only)	+/- 0.002 in overall																										
Shaft Type	SL - 1060 Steel or 440C Stainless steel																										
Shaft Roundness	0.000080 inches																										
Shaft Chamfer	For 0.50 - 0.75 inch dia. : 0.03 inch x 45°, For 1.00 - 2.00 inch dia. : 0.06 inch x 45°																										
Surface Finish	8 - 12 R _a microinch																										
Diameter Tolerance	<table><tr><th>Nominal Shaft Diameter (inches)</th><th>Shaft Diameter Tolerance (inches)</th><th>Minimum Hardness Depth (inches)</th></tr><tr><td>0.500</td><td>.4995 / .4990</td><td>0.040</td></tr><tr><td>0.625</td><td>.6245 / .6240</td><td>0.040</td></tr><tr><td>0.750</td><td>.7495 / .7490</td><td>0.060</td></tr><tr><td>1.000</td><td>.9995 / .9990</td><td>0.080</td></tr><tr><td>1.250</td><td>1.2495 / 1.2490</td><td>0.080</td></tr><tr><td>1.500</td><td>1.4994 / 1.4989</td><td>0.080</td></tr><tr><td>2.000</td><td>1.9994 / 1.9987</td><td>0.100</td></tr></table>			Nominal Shaft Diameter (inches)	Shaft Diameter Tolerance (inches)	Minimum Hardness Depth (inches)	0.500	.4995 / .4990	0.040	0.625	.6245 / .6240	0.040	0.750	.7495 / .7490	0.060	1.000	.9995 / .9990	0.080	1.250	1.2495 / 1.2490	0.080	1.500	1.4994 / 1.4989	0.080	2.000	1.9994 / 1.9987	0.100
Nominal Shaft Diameter (inches)				Shaft Diameter Tolerance (inches)	Minimum Hardness Depth (inches)																						
0.500				.4995 / .4990	0.040																						
0.625				.6245 / .6240	0.040																						
0.750				.7495 / .7490	0.060																						
1.000				.9995 / .9990	0.080																						
1.250				1.2495 / 1.2490	0.080																						
1.500				1.4994 / 1.4989	0.080																						
2.000				1.9994 / 1.9987	0.100																						
Hardness Depth																											

Dimensions & Specifications: SA Shaft Assembly







Model Number	Nominal Shaft Diameter (inches)	Overall Length (inches)	Dimensions (inches)							Assembly Weight (lbs)
			A +/- .002	B	C	D	E +/- .010	F hole	G bolt size	
SA8-6	0.500	6	1.125	1.500	.250	.187	1.000	.169	#6-32	0.5
SA10-6	0.625	6	1.125	1.625	.312	.250	1.125	.193	#8-32	0.8
SA12-6	0.750	6	1.500	1.750	.375	.250	1.250	.221	#10-32	1.0
SA16-6	1.000	6	1.750	2.125	.500	.250	1.500	.281	1/4-20	1.7
SA20-6 ⁽¹⁾	1.250	6	2.125	2.500	.562	.312	1.875	.281	1/4-20	2.7
SA24-6 ⁽¹⁾	1.500	6	2.500	3.000	.687	.375	2.250	.343	5/16-18	3.7
SA32-6 ⁽¹⁾	2.000	6	3.250	3.750	.875	.500	2.750	.406	3/8-16	6.4
SA8-12	0.500	12	1.125	1.500	.250	.187	1.000	.169	#6-32	0.9
SA10-12	0.625	12	1.125	1.625	.312	.250	1.125	.193	#8-32	1.5
SA12-12	0.750	12	1.500	1.750	.375	.250	1.250	.221	#10-32	2.0
SA16-12	1.000	12	1.750	2.125	.500	.250	1.500	.281	1/4-20	3.4
SA20-12	1.250	12	2.125	2.500	.562	.312	1.875	.281	1/4-20	5.3
SA24-12	1.500	12	2.500	3.000	.687	.375	2.250	.343	5/16-18	7.3
SA32-12 ⁽¹⁾	2.000	12	3.250	3.750	.875	.500	2.750	.406	3/8-16	12.8
SA8-18	0.500	18	1.125	1.500	.250	.187	1.000	.169	#6-32	1.4
SA10-18	0.625	18	1.125	1.625	.312	.250	1.125	.193	#8-32	2.2
SA12-18	0.750	18	1.500	1.750	.375	.250	1.250	.221	#10-32	3.0
SA16-18	1.000	18	1.750	2.125	.500	.250	1.500	.281	1/4-20	5.1
SA20-18	1.250	18	2.125	2.500	.562	.312	1.875	.281	1/4-20	7.9
SA24-18	1.500	18	2.500	3.000	.687	.375	2.250	.343	5/16-18	11.0
SA32-18 ⁽¹⁾	2.000	18	3.250	3.750	.875	.500	2.750	.406	3/8-16	19.2
SA8-24	0.500	24	1.125	1.500	.250	.187	1.000	.169	#6-32	1.8
SA10-24	0.625	24	1.125	1.625	.312	.250	1.125	.193	#8-32	2.9
SA12-24	0.750	24	1.500	1.750	.375	.250	1.250	.221	#10-32	4.0
SA16-24	1.000	24	1.750	2.125	.500	.250	1.500	.281	1/4-20	6.8
SA20-24	1.250	24	2.125	2.500	.562	.312	1.875	.281	1/4-20	10.5
SA24-24	1.500	24	2.500	3.000	.687	.375	2.250	.343	5/16-18	14.6
SA32-24	2.000	24	3.250	3.750	.875	.500	2.750	.406	3/8-16	25.6
SA8-30	0.500	30	1.125	1.500	.250	.187	1.000	.169	#6-32	2.3
SA10-30	0.625	30	1.125	1.625	.312	.250	1.125	.193	#8-32	3.6
SA12-30	0.750	30	1.500	1.750	.375	.250	1.250	.221	#10-32	5.0
SA16-30	1.000	30	1.750	2.125	.500	.250	1.500	.281	1/4-20	8.4
SA20-30	1.250	30	2.125	2.500	.562	.312	1.875	.281	1/4-20	13.1
SA24-30	1.500	30	2.500	3.000	.687	.375	2.250	.343	5/16-18	18.3
SA32-30	2.000	30	3.250	3.750	.875	.500	2.750	.406	3/8-16	32.0

Footnotes:

(1) Not a stock item, but available upon request.

Dimensions

(inches)

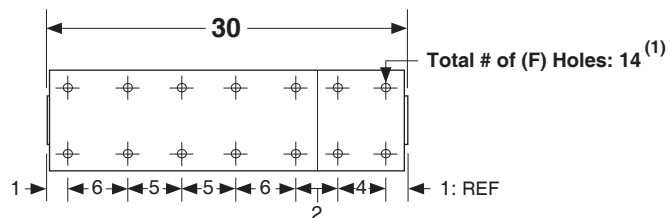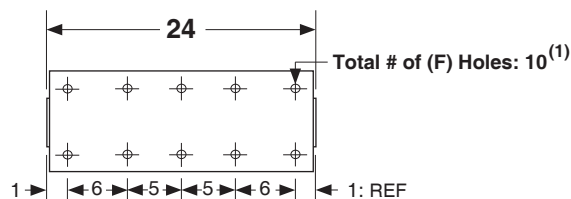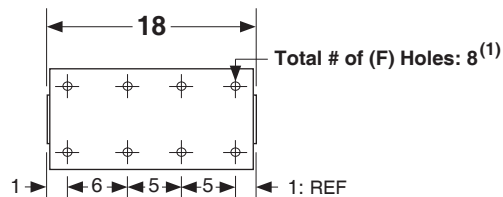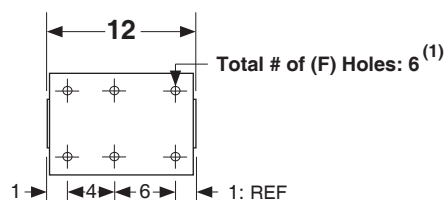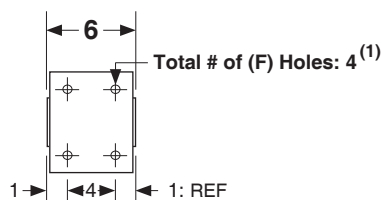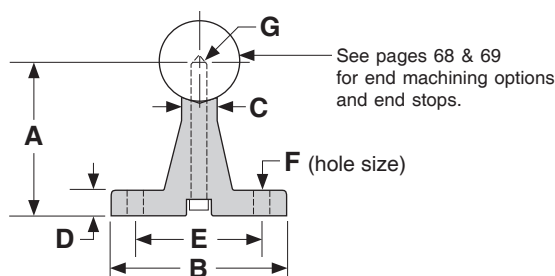

Footnotes:







(1) Shaft supports come in 6, 12, 18 and 24 inch segments. The mounting hole location linear tolerance is +/- .010 inches noncumulative per segment. These supports are not one piece for lengths over 24 inches. The mounting hole linear tolerance is +/- .015 inches cumulative from one support segment to the next.

Dimensions & Specifications: SA Shaft Assembly

Model Number	Nominal Shaft Diameter (inches)	Overall Length (inches)	Dimensions (inches)							Assembly Weight (lbs)
			A +/- .002	B	C	D	E +/- .010	F hole	G bolt size	
SA8-36	0.500	36	1.125	1.500	.250	.187	1.000	.169	#6-32	2.7
SA10-36	0.625	36	1.125	1.625	.312	.250	1.125	.193	#8-32	4.3
SA12-36	0.750	36	1.500	1.750	.375	.250	1.250	.221	#10-32	6.0
SA16-36	1.000	36	1.750	2.125	.500	.250	1.500	.281	1/4-20	10.1
SA20-36	1.250	36	2.125	2.500	.562	.312	1.875	.281	1/4-20	15.7
SA24-36	1.500	36	2.500	3.000	.687	.375	2.250	.343	5/16-18	21.9
SA32-36	2.000	36	3.250	3.750	.875	.500	2.750	.406	3/8-16	38.4
SA8-42	0.500	42	1.125	1.500	.250	.187	1.000	.169	#6-32	3.2
SA10-42	0.625	42	1.125	1.625	.312	.250	1.125	.193	#8-32	5.1
SA12-42	0.750	42	1.500	1.750	.375	.250	1.250	.221	#10-32	7.0
SA16-42	1.000	42	1.750	2.125	.500	.250	1.500	.281	1/4-20	11.8
SA20-42	1.250	42	2.125	2.500	.562	.312	1.875	.281	1/4-20	18.4
SA24-42	1.500	42	2.500	3.000	.687	.375	2.250	.343	5/16-18	25.6
SA32-42	2.000	42	3.250	3.750	.875	.500	2.750	.406	3/8-16	44.8
SA8-48	0.500	48	1.125	1.500	.250	.187	1.000	.169	#6-32	3.6
SA10-48	0.625	48	1.125	1.625	.312	.250	1.125	.193	#8-32	5.8
SA12-48	0.750	48	1.500	1.750	.375	.250	1.250	.221	#10-32	8.0
SA16-48	1.000	48	1.750	2.125	.500	.250	1.500	.281	1/4-20	13.5
SA20-48	1.250	48	2.125	2.500	.562	.312	1.875	.281	1/4-20	21.0
SA24-48	1.500	48	2.500	3.000	.687	.375	2.250	.343	5/16-18	29.2
SA32-48	2.000	48	3.250	3.750	.875	.500	2.750	.406	3/8-16	51.2
SA8-54	0.500	54	1.125	1.500	.250	.187	1.000	.169	#6-32	4.1
SA10-54	0.625	54	1.125	1.625	.312	.250	1.125	.193	#8-32	6.5
SA12-54	0.750	54	1.500	1.750	.375	.250	1.250	.221	#10-32	9.0
SA16-54	1.000	54	1.750	2.125	.500	.250	1.500	.281	1/4-20	15.2
SA20-54	1.250	54	2.125	2.500	.562	.312	1.875	.281	1/4-20	23.6
SA24-54	1.500	54	2.500	3.000	.687	.375	2.250	.343	5/16-18	32.9
SA32-54	2.000	54	3.250	3.750	.875	.500	2.750	.406	3/8-16	57.6
SA8-60	0.500	60	1.125	1.500	.250	.187	1.000	.169	#6-32	4.5
SA10-60	0.625	60	1.125	1.625	.312	.250	1.125	.193	#8-32	7.2
SA12-60	0.750	60	1.500	1.750	.375	.250	1.250	.221	#10-32	10.0
SA16-60	1.000	60	1.750	2.125	.500	.250	1.500	.281	1/4-20	16.8
SA20-60	1.250	60	2.125	2.500	.562	.312	1.875	.281	1/4-20	26.2
SA24-60	1.500	60	2.500	3.000	.687	.375	2.250	.343	5/16-18	36.5
SA32-60	2.000	60	3.250	3.750	.875	.500	2.750	.406	3/8-16	63.9

Dimensions

(inches)

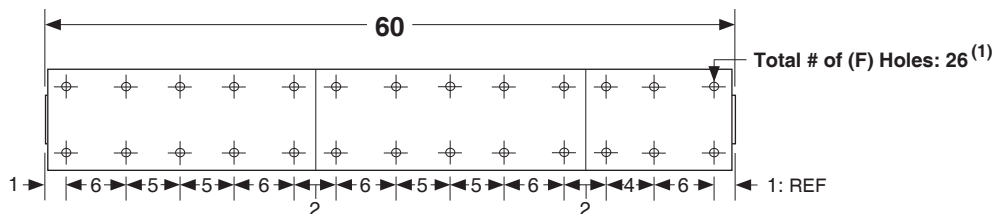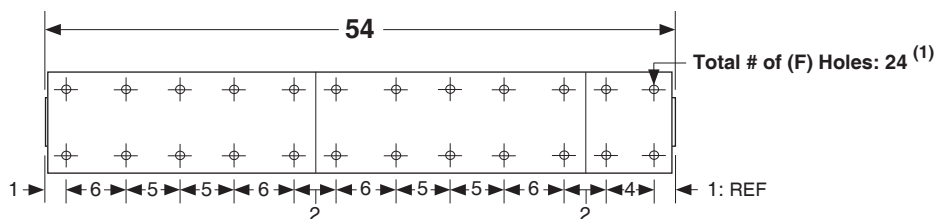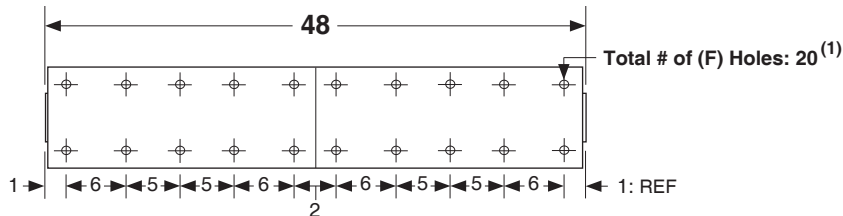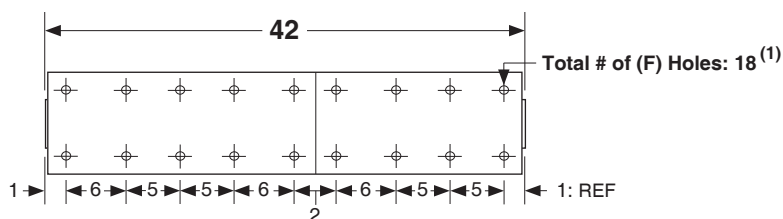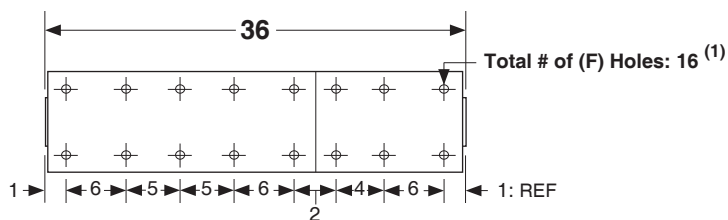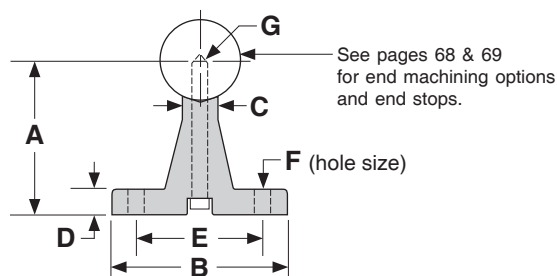

Footnotes:







- (1) Shaft supports come in 6, 12, 18 and 24 inch segments. The mounting hole location linear tolerance is +/- .010 inches noncumulative per segment. These supports are not one piece for lengths over 24 inches. The mounting hole linear tolerance is +/- .015 inches cumulative from one support segment to the next.

Dimensions & Specifications: SA Shaft Assembly

Model Number	Nominal Shaft Diameter (inches)	Overall Length (inches)	Dimensions (inches)							Assembly Weight (lbs)
			A +/- .002	B	C	D	E +/- .010	F hole	G bolt size	
SA8-66	0.500	66	1.125	1.500	.250	.187	1.000	.169	#6-32	5.0
SA10-66	0.625	66	1.125	1.625	.312	.250	1.125	.193	#8-32	7.9
SA12-66	0.750	66	1.500	1.750	.375	.250	1.250	.221	#10-32	11.0
SA16-66	1.000	66	1.750	2.125	.500	.250	1.500	.281	1/4-20	18.5
SA20-66	1.250	66	2.125	2.500	.562	.312	1.875	.281	1/4-20	28.8
SA24-66	1.500	66	2.500	3.000	.687	.375	2.250	.343	5/16-18	40.2
SA32-66	2.000	66	3.250	3.750	.875	.500	2.750	.406	3/8-16	70.3
SA8-72	0.500	72	1.125	1.500	.250	.187	1.000	.169	#6-32	5.4
SA10-72	0.625	72	1.125	1.625	.312	.250	1.125	.193	#8-32	8.6
SA12-72	0.750	72	1.500	1.750	.375	.250	1.250	.221	#10-32	12.0
SA16-72	1.000	72	1.750	2.125	.500	.250	1.500	.281	1/4-20	20.2
SA20-72	1.250	72	2.125	2.500	.562	.312	1.875	.281	1/4-20	31.4
SA24-72	1.500	72	2.500	3.000	.687	.375	2.250	.343	5/16-18	43.8
SA32-72	2.000	72	3.250	3.750	.875	.500	2.750	.406	3/8-16	76.7
SA8-84	0.500	84	1.125	1.500	.250	.187	1.000	.169	#6-32	6.3
SA10-84	0.625	84	1.125	1.625	.312	.250	1.125	.193	#8-32	10.0
SA12-84	0.750	84	1.500	1.750	.375	.250	1.250	.221	#10-32	14.0
SA16-84	1.000	84	1.750	2.125	.500	.250	1.500	.281	1/4-20	23.6
SA20-84	1.250	84	2.125	2.500	.562	.312	1.875	.281	1/4-20	36.6
SA24-84	1.500	84	2.500	3.000	.687	.375	2.250	.343	5/16-18	51.1
SA32-84	2.000	84	3.250	3.750	.875	.500	2.750	.406	3/8-16	89.5
SA8-96	0.500	96	1.125	1.500	.250	.187	1.000	.169	#6-32	7.2
SA10-96	0.625	96	1.125	1.625	.312	.250	1.125	.193	#8-32	11.5
SA12-96	0.750	96	1.500	1.750	.375	.250	1.250	.221	#10-32	16.0
SA16-96	1.000	96	1.750	2.125	.500	.250	1.500	.281	1/4-20	26.9
SA20-96	1.250	96	2.125	2.500	.562	.312	1.875	.281	1/4-20	41.9
SA24-96	1.500	96	2.500	3.000	.687	.375	2.250	.343	5/16-18	58.4
SA32-96	2.000	96	3.250	3.750	.875	.500	2.750	.406	3/8-16	102.3
SA8-108	0.500	108	1.125	1.500	.250	.187	1.000	.169	#6-32	8.1
SA10-108	0.625	108	1.125	1.625	.312	.250	1.125	.193	#8-32	12.9
SA12-108	0.750	108	1.500	1.750	.375	.250	1.250	.221	#10-32	18.0
SA16-108	1.000	108	1.750	2.125	.500	.250	1.500	.281	1/4-20	30.3
SA20-108	1.250	108	2.125	2.500	.562	.312	1.875	.281	1/4-20	47.1
SA24-108	1.500	108	2.500	3.000	.687	.375	2.250	.343	5/16-18	65.7
SA32-108	2.000	108	3.250	3.750	.875	.500	2.750	.406	3/8-16	115.1

Dimensions

(inches)

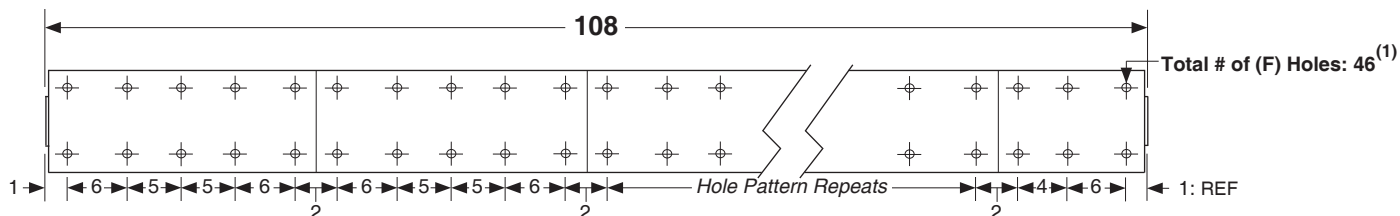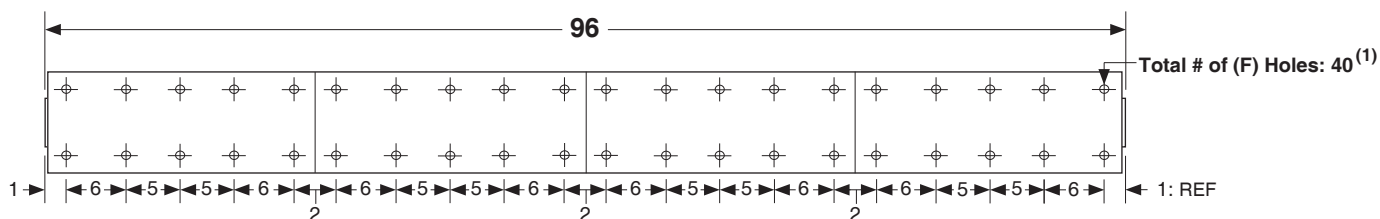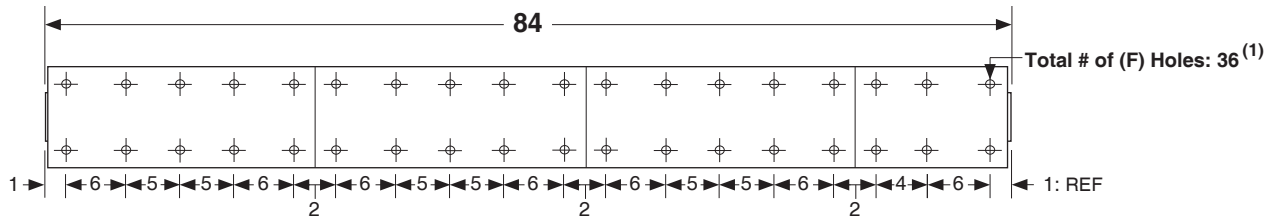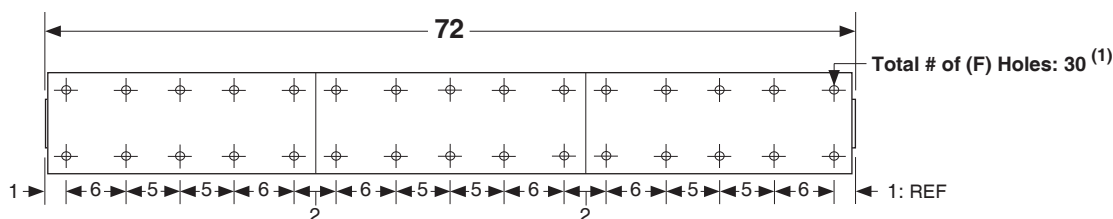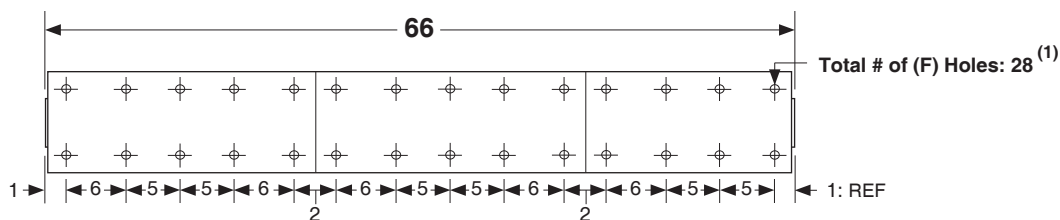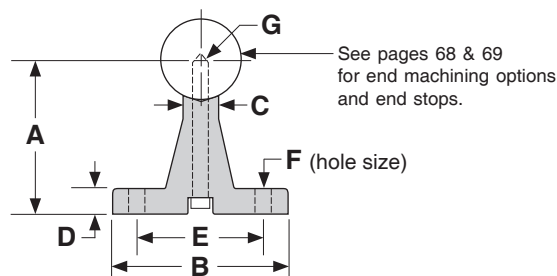

Footnotes:






- (1) Shaft supports come in 6, 12, 18 and 24 inch segments. The mounting hole location linear tolerance is +/- .010 inches noncumulative per segment. These supports are not one piece for lengths over 24 inches. The mounting hole linear tolerance is +/- .015 inches cumulative from one support segment to the next.

Dimensions & Specifications: SA Shaft Assembly

Model Number	Nominal Shaft Diameter (inches)	Overall Length (inches)	Dimensions (inches)							Assembly Weight (lbs)
			A +/- .002	B	C	D	E +/- .010	F hole	G bolt size	
SA8-120	0.500	120	1.125	1.500	.250	.187	1.000	.169	#6-32	9.0
SA10-120	0.625	120	1.125	1.625	.312	.250	1.125	.193	#8-32	14.3
SA12-120	0.750	120	1.500	1.750	.375	.250	1.250	.221	#10-32	20.0
SA16-120	1.000	120	1.750	2.125	.500	.250	1.500	.281	1/4-20	33.6
SA20-120	1.250	120	2.125	2.500	.562	.312	1.875	.281	1/4-20	52.3
SA24-120	1.500	120	2.500	3.000	.687	.375	2.250	.343	5/16-18	73.0
SA32-120	2.000	120	3.250	3.750	.875	.500	2.750	.406	3/8-16	127.8
SA8-144	0.500	144	1.125	1.500	.250	.187	1.000	.169	#6-32	10.8
SA10-144	0.625	144	1.125	1.625	.312	.250	1.125	.193	#8-32	17.2
SA12-144	0.750	144	1.500	1.750	.375	.250	1.250	.221	#10-32	24.0
SA16-144	1.000	144	1.750	2.125	.500	.250	1.500	.281	1/4-20	40.4
SA20-144	1.250	144	2.125	2.500	.562	.312	1.875	.281	1/4-20	62.8
SA24-144	1.500	144	2.500	3.000	.687	.375	2.250	.343	5/16-18	87.6
SA32-144	2.000	144	3.250	3.750	.875	.500	2.750	.406	3/8-16	153.4
SA12-168	0.750	168	1.500	1.750	.375	.250	1.250	.221	#10-32	28.0
SA16-168	1.000	168	1.750	2.125	.500	.250	1.500	.281	1/4-20	47.1
SA20-168	1.250	168	2.125	2.500	.562	.312	1.875	.281	1/4-20	73.3
SA24-168	1.500	168	2.500	3.000	.687	.375	2.250	.343	5/16-18	102.2
SA32-168	2.000	168	3.250	3.750	.875	.500	2.750	.406	3/8-16	179.0
SA12-192	0.750	192	1.500	1.750	.375	.250	1.250	.221	#10-32	32.0
SA16-192	1.000	192	1.750	2.125	.500	.250	1.500	.281	1/4-20	53.8
SA20-192	1.250	192	2.125	2.500	.562	.312	1.875	.281	1/4-20	83.7
SA24-192	1.500	192	2.500	3.000	.687	.375	2.250	.343	5/16-18	116.8
SA32-192	2.000	192	3.250	3.750	.875	.500	2.750	.406	3/8-16	204.5

Dimensions

(inches)

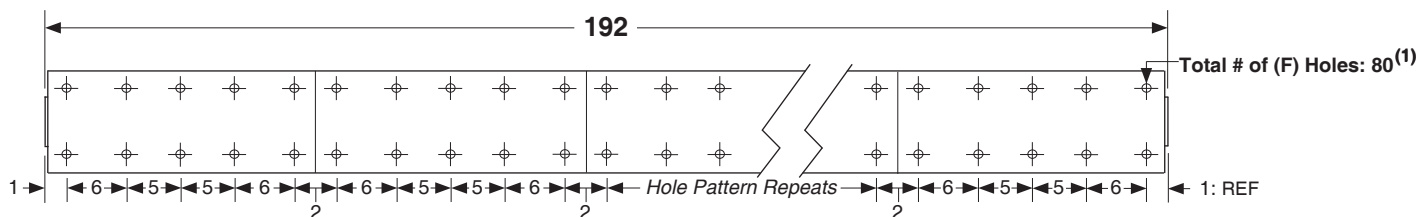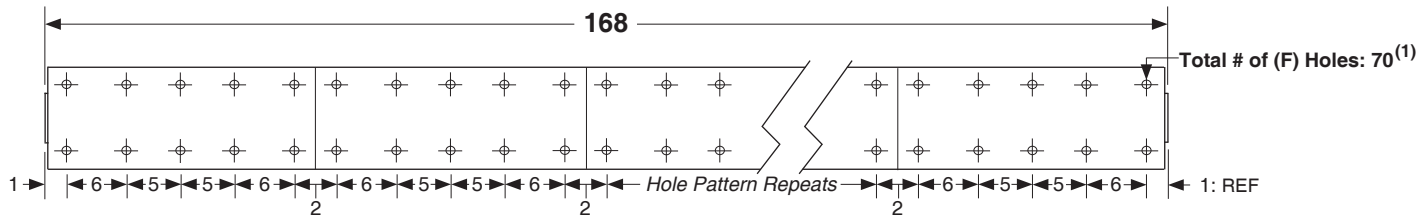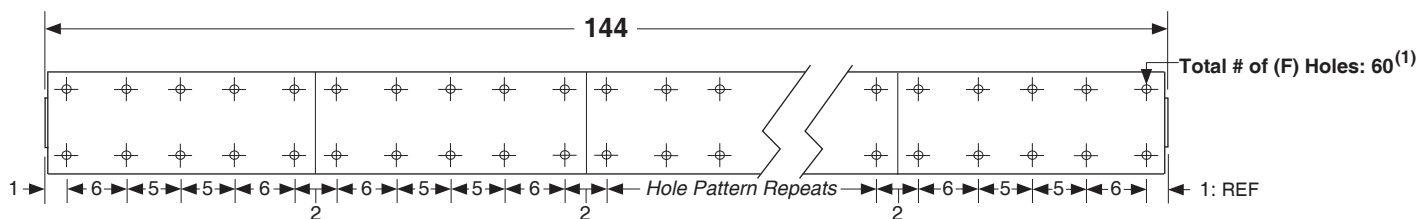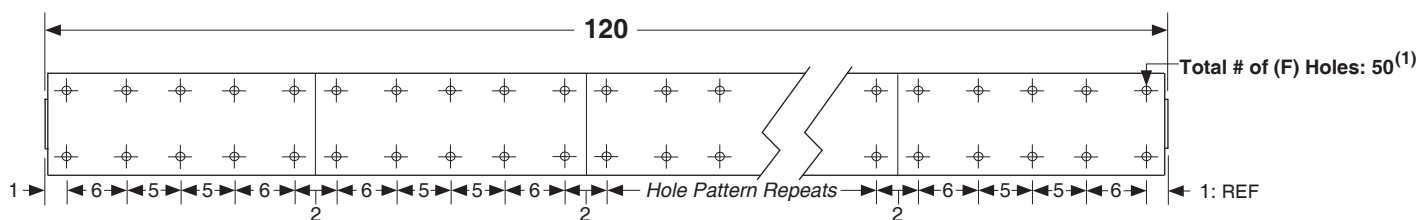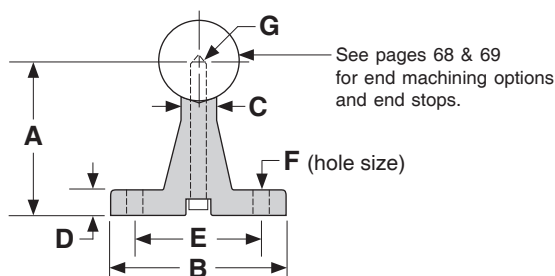

Footnotes:

(1) Shaft supports come in 6, 12, 18 and 24 inch segments. The mounting hole location linear tolerance is +/- .010 inches noncumulative per segment. These supports are not one piece for lengths over 24 inches. The mounting hole linear tolerance is +/- .015 inches cumulative from one support segment to the next.

Dimensions & Specifications: TRSA TWIN RAIL® Shaft Assembly

Model Number	Nominal Shaft Diameter (inches)	Overall Length (inches)	Dimensions (inches)											Assembly Weight (lbs)
			A +/- .002	B +/- .002	C	D	E +/- .010	F	G	H	J hole	K Bolt Size	L ⁽²⁾ Thread	
TRSA8-6	0.500	6	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	1.8
TRSA10-6	0.625	6	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	2.4
TRSA12-6	0.750	6	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	3.4
TRSA16-6	1.000	6	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	5.0
TRSA20-6 ⁽¹⁾	1.250	6	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	7.5
TRSA24-6 ⁽¹⁾	1.500	6	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	10.5
TRSA32-6 ⁽¹⁾	2.000	6	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	15.7
TRSA8-12	0.500	12	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	3.6
TRSA10-12	0.625	12	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	4.8
TRSA12-12	0.750	12	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	6.8
TRSA16-12	1.000	12	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	10.0
TRSA20-12	1.250	12	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	15.0
TRSA24-12	1.500	12	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	21.0
TRSA32-12 ⁽¹⁾	2.000	12	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	31.3
TRSA8-18	0.500	18	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	5.4
TRSA10-18	0.625	18	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	7.2
TRSA12-18	0.750	18	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	10.1
TRSA16-18	1.000	18	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	15.0
TRSA20-18	1.250	18	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	22.4
TRSA24-18	1.500	18	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	31.4
TRSA32-18 ⁽¹⁾	2.000	18	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	46.9
TRSA8-24	0.500	24	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	7.2
TRSA10-24	0.625	24	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	9.6
TRSA12-24	0.750	24	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	13.5
TRSA16-24	1.000	24	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	20.0
TRSA20-24	1.250	24	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	29.9
TRSA24-24	1.500	24	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	41.9
TRSA32-24	2.000	24	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	62.5
TRSA8-30	0.500	30	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	9.0
TRSA10-30	0.625	30	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	12.0
TRSA12-30	0.750	30	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	16.8
TRSA16-30	1.000	30	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	25.0
TRSA20-30	1.250	30	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	37.3
TRSA24-30	1.500	30	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	52.3
TRSA32-30	2.000	30	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	78.1

Footnotes:







(1) Not a stock item, but available upon request.

(2) Two threaded leveling holes per TWIN RAIL® support segment are used for setscrew adjustment to aid in assembly leveling to the user mounting surfaces.

Specifications subject to change without notice

Dimensions

(inches)

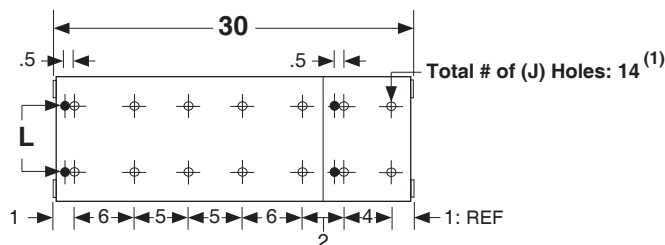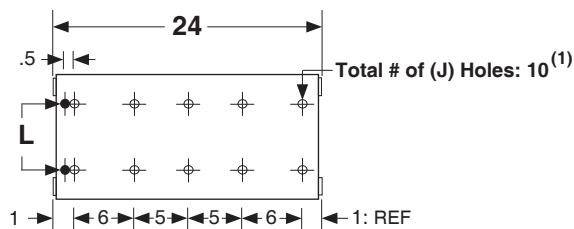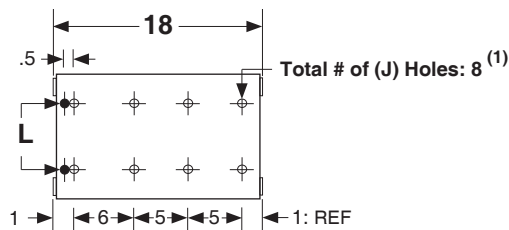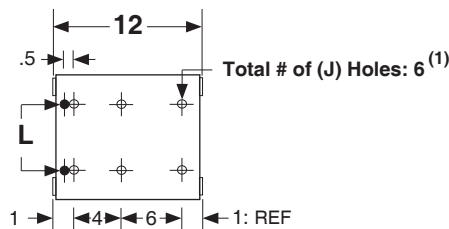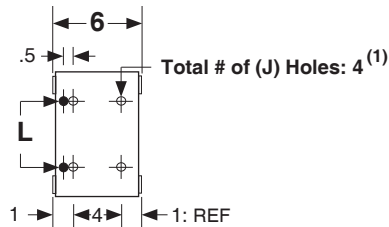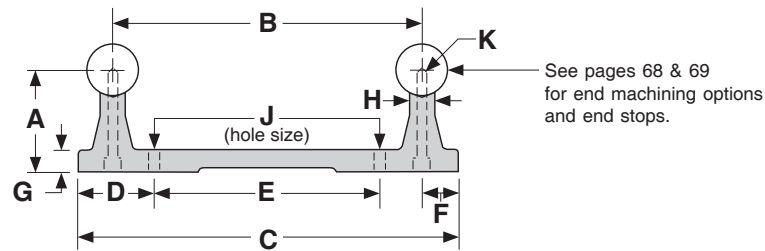

Footnotes:

(1) *TWIN RAIL*® supports come in 6, 12, 18 and 24 inch segments. The mounting hole location linear tolerance is +/- .010 inches noncumulative per segment. The supports are not one piece for lengths over 24 inches. The mounting hole linear tolerance is +/- .015 inches cumulative from one support segment to the next.

Dimensions & Specifications: TRSA TWIN RAIL® Shaft Assembly







Model Number	Nominal Shaft Diameter (inches)	Overall Length (inches)	Dimensions (inches)											Assembly Weight (lbs)
			A +/- .002	B +/- .002	C	D	E +/- .010	F	G	H	J hole	K Bolt Size	L ⁽¹⁾ Thread	
TRSA8-36	0.500	36	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	10.8
TRSA10-36	0.625	36	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	14.4
TRSA12-36	0.750	36	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	20.2
TRSA16-36	1.000	36	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	30.0
TRSA20-36	1.250	36	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	44.8
TRSA24-36	1.500	36	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	62.8
TRSA32-36	2.000	36	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	93.7
TRSA8-42	0.500	42	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	12.6
TRSA10-42	0.625	42	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	16.7
TRSA12-42	0.750	42	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	23.6
TRSA16-42	1.000	42	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	35.0
TRSA20-42	1.250	42	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	52.3
TRSA24-42	1.500	42	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	73.2
TRSA32-42	2.000	42	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	109.3
TRSA8-48	0.500	48	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	14.4
TRSA10-48	0.625	48	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	19.1
TRSA12-48	0.750	48	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	26.9
TRSA16-48	1.000	48	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	40.0
TRSA20-48	1.250	48	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	59.7
TRSA24-48	1.500	48	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	83.7
TRSA32-48	2.000	48	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	124.9
TRSA8-54	0.500	54	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	16.2
TRSA10-54	0.625	54	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	21.5
TRSA12-54	0.750	54	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	30.3
TRSA16-54	1.000	54	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	45.0
TRSA20-54	1.250	54	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	67.2
TRSA24-54	1.500	54	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	94.1
TRSA32-54	2.000	54	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	140.5
TRSA8-60	0.500	60	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	18.0
TRSA10-60	0.625	60	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	23.9
TRSA12-60	0.750	60	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	33.6
TRSA16-60	1.000	60	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	49.9
TRSA20-60	1.250	60	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	74.6
TRSA24-60	1.500	60	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	104.6
TRSA32-60	2.000	60	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	156.1

Footnotes:

(1) Two threaded leveling holes per TWIN RAIL® support segment are used for setscrew adjustment to aid in assembly leveling to the user mounting surfaces.

Dimensions

(inches)

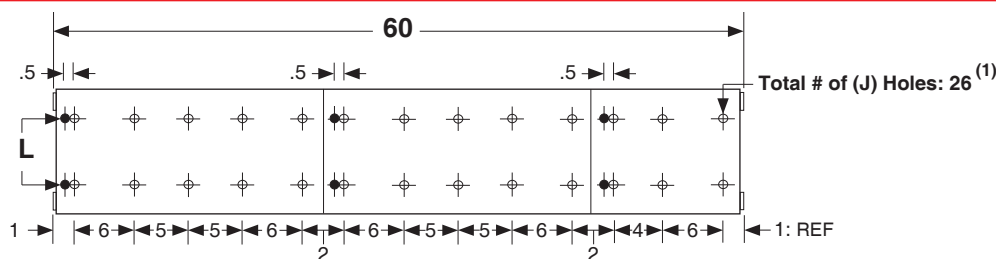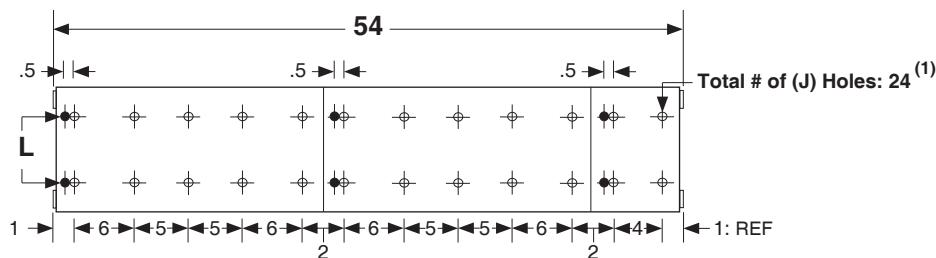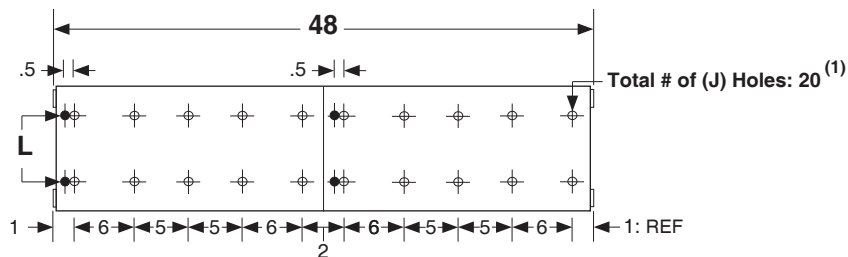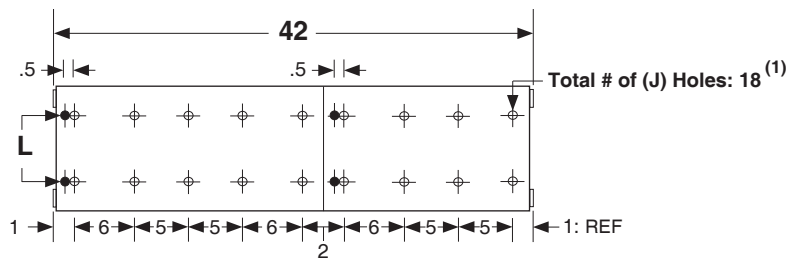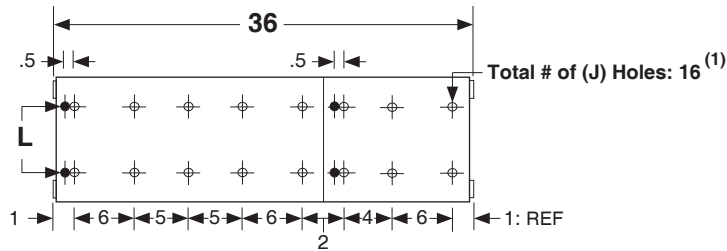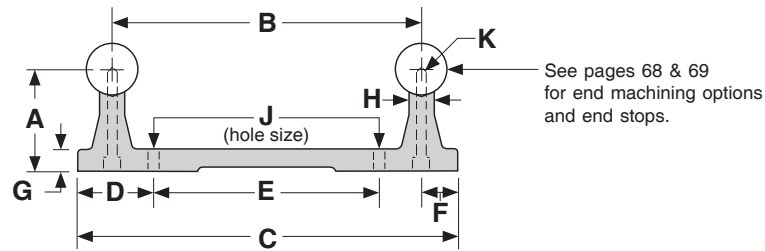

Footnotes:

(1) TWIN RAIL® supports come in 6, 12, 18 and 24 inch segments. The mounting hole location linear tolerance is +/- .010 inches noncumulative per segment. The supports are not one piece for lengths over 24 inches. The mounting hole linear tolerance is +/- .015 inches cumulative from one support segment to the next.

Dimensions & Specifications: **TRSA** *TWIN RAIL*® Shaft Assembly







Model Number	Nominal Shaft Diameter (inches)	Overall Length (inches)	Dimensions (inches)											Assembly Weight (lbs)
			A +/- .002	B +/- .002	C	D	E +/- .010	F	G	H	J hole	K Bolt Size	L ⁽¹⁾ Thread	
TRSA8-66	0.500	66	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	19.8
TRSA10-66	0.625	66	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	26.3
TRSA12-66	0.750	66	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	37.0
TRSA16-66	1.000	66	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	54.9
TRSA20-66	1.250	66	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	82.1
TRSA24-66	1.500	66	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	115.1
TRSA32-66	2.000	66	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	171.8
TRSA8-72	0.500	72	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	21.6
TRSA10-72	0.625	72	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	28.7
TRSA12-72	0.750	72	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	40.4
TRSA16-72	1.000	72	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	59.9
TRSA20-72	1.250	72	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	89.6
TRSA24-72	1.500	72	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	125.5
TRSA32-72	2.000	72	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	187.4
TRSA8-84	0.500	84	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	25.2
TRSA10-84	0.625	84	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	33.4
TRSA12-84	0.750	84	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	47.1
TRSA16-84	1.000	84	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	69.9
TRSA20-84	1.250	84	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	104.5
TRSA24-84	1.500	84	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	146.4
TRSA32-84	2.000	84	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	218.6
TRSA8-96	0.500	96	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	28.8
TRSA10-96	0.625	96	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	38.2
TRSA12-96	0.750	96	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	53.8
TRSA16-96	1.000	96	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	79.9
TRSA20-96	1.250	96	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	119.4
TRSA24-96	1.500	96	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	167.3
TRSA32-96	2.000	96	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	249.8
TRSA8-108	0.500	108	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	32.4
TRSA10-108	0.625	108	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	43.0
TRSA12-108	0.750	108	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	60.5
TRSA16-108	1.000	108	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	89.9
TRSA20-108	1.250	108	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	134.3
TRSA24-108	1.500	108	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	188.2
TRSA32-108	2.000	108	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	281.0

Footnotes:

(1) Two threaded leveling holes per *TWIN RAIL*® support segment are used for setscrew adjustment to aid in assembly leveling to the user mounting surfaces.

Dimensions

(inches)

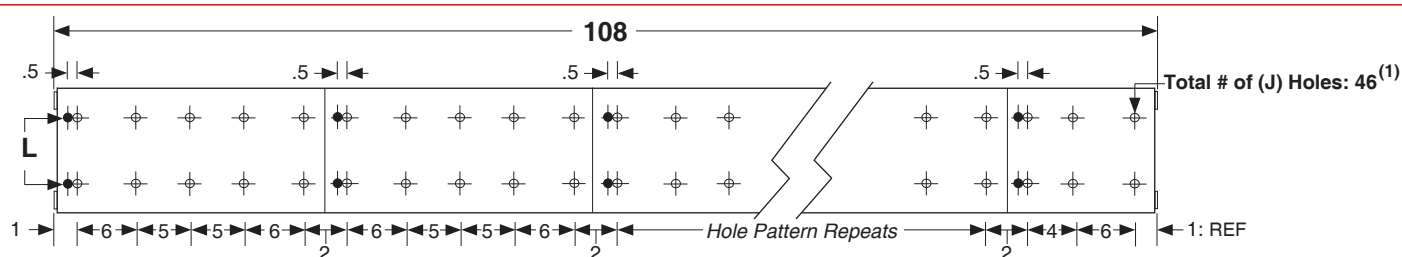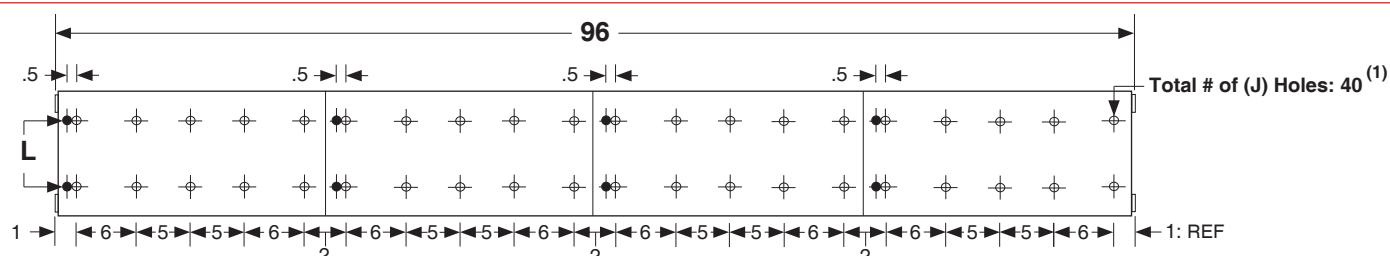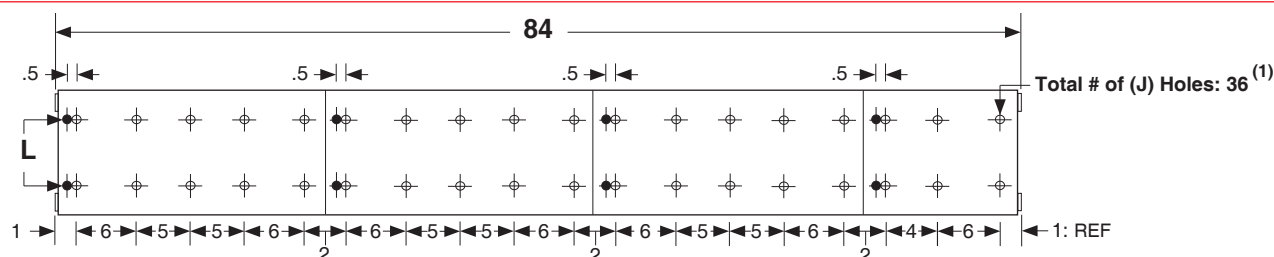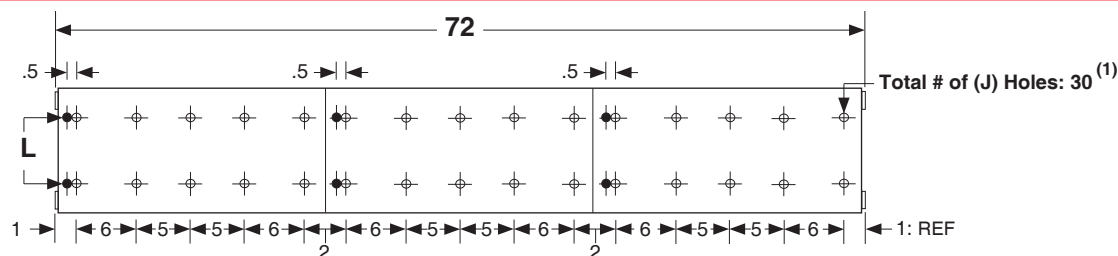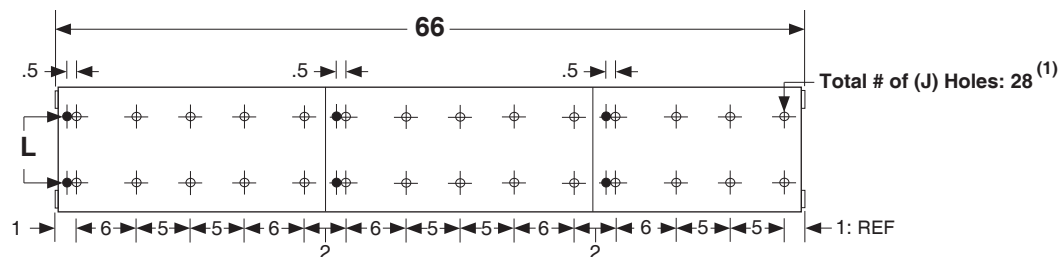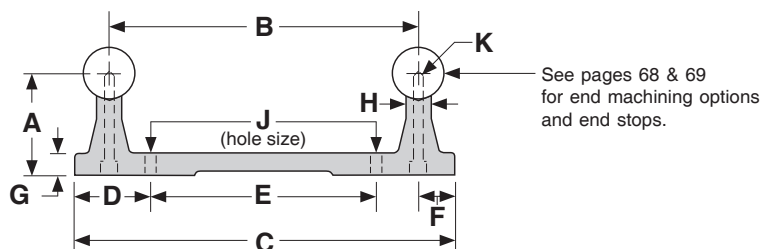

Footnotes:

(1) *TWIN RAIL*® supports come in 6, 12, 18 and 24 inch segments. The mounting hole location linear tolerance is $\pm .010$ inches noncumulative per segment. The supports are not one piece for lengths over 24 inches. The mounting hole linear tolerance is $\pm .015$ inches cumulative from one support segment to the next.

Specifications subject to change without notice

Dimensions & Specifications: TRSA TWIN RAIL® Shaft Assembly



Model Number	Nominal Shaft Diameter (inches)	Overall Length (inches)	Dimensions (inches)											Assembly Weight (lbs)
			A +/- .002	B +/- .002	C	D	E +/- .010	F	G	H	J hole	K Bolt Size	L ⁽¹⁾ Thread	
TRSA8-120	0.500	120	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	35.9
TRSA10-120	0.625	120	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	47.7
TRSA12-120	0.750	120	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	67.2
TRSA16-120	1.000	120	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	99.8
TRSA20-120	1.250	120	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	149.2
TRSA24-120	1.500	120	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	209.1
TRSA32-120	2.000	120	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	312.2
TRSA8-144	0.500	144	1.125	3.000	3.750	0.875	2.000	.375	.312	.250	.169	#6-32	#10-32	43.1
TRSA10-144	0.625	144	1.125	3.750	4.625	1.000	2.625	.437	.312	.312	.193	#8-32	#10-32	57.3
TRSA12-144	0.750	144	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	80.7
TRSA16-144	1.000	144	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	119.8
TRSA20-144	1.250	144	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	179.1
TRSA24-144	1.500	144	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	251.0
TRSA32-144	2.000	144	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	374.7
TRSA12-168	0.750	168	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	94.1
TRSA16-168	1.000	168	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	139.8
TRSA20-168	1.250	168	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	208.9
TRSA24-168	1.500	168	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	292.8
TRSA32-168	2.000	168	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	437.1
TRSA12-192	0.750	192	1.500	4.500	5.500	1.125	3.250	.500	.312	.375	.221	#10-32	#10-32	107.6
TRSA16-192	1.000	192	1.750	5.250	6.375	1.312	3.750	.562	.312	.500	.281	1/4-20	#10-32	159.7
TRSA20-192	1.250	192	2.125	6.000	7.250	1.562	4.125	.625	.375	.562	.281	1/4-20	1/4-20	238.8
TRSA24-192	1.500	192	2.500	6.625	8.125	1.875	4.375	.750	.437	.687	.343	5/16-18	5/16-18	334.6
TRSA32-192	2.000	192	3.250	7.250	9.000	2.250	4.500	.875	.562	.875	.406	3/8-16	3/8-16	499.6

Footnotes:

(1) Two threaded leveling holes per TWIN RAIL® support segment are used for setscrew adjustment to aid in assembly leveling to the user mounting surfaces.

Dimensions

(inches)


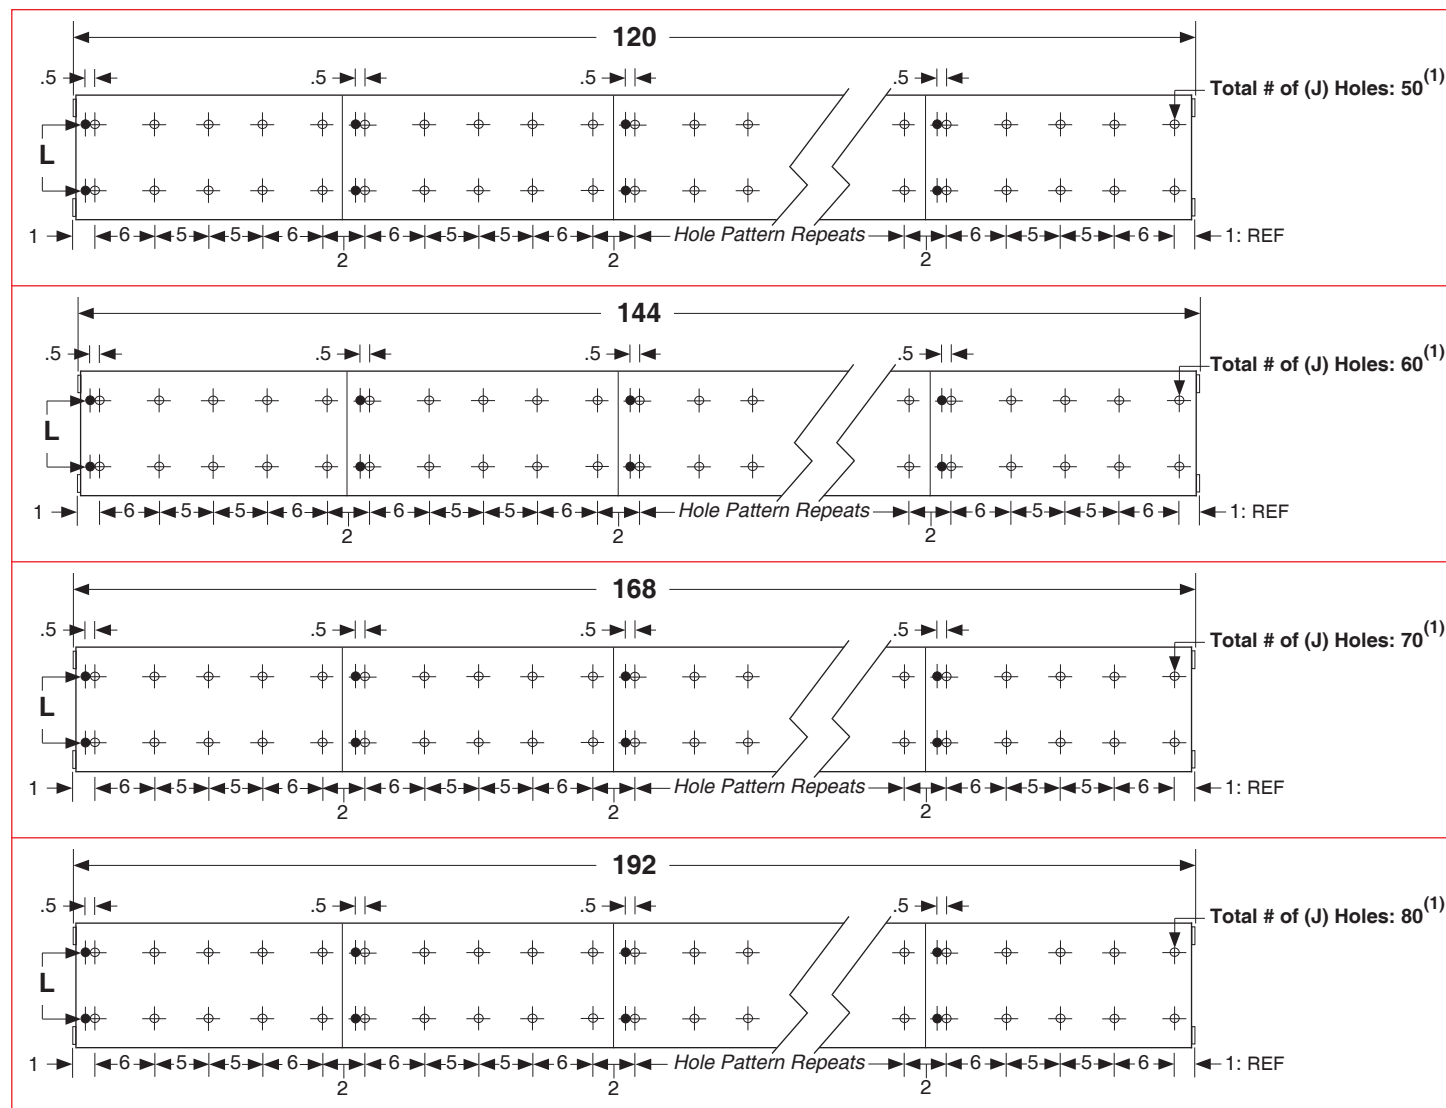
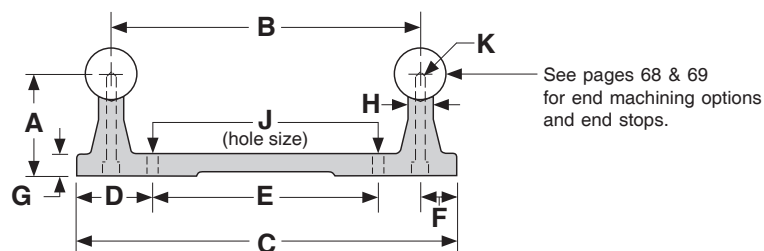


Footnotes:

(1) *TWIN RAIL*® supports come in 6, 12, 18 and 24 inch segments. The mounting hole location linear tolerance is +/- .010 inches noncumulative per segment. The supports are not one piece for lengths over 24 inches. The mounting hole linear tolerance is +/- .015 inches cumulative from one support segment to the next.




Reduced Diameters, End Stops, Coaxial & Radial Holes

Reduced diameters, end stops, coaxial & radial holes can be provided on any shaft or shaft assembly. The standard tolerance for a reduced diameter is +/- .001 inches, while the concentricity is .002 inches TIR. The shaft may be annealed and soft around the shaft circumference adjacent to the reduced diameter. Coaxial holes are drilled and tapped in the center of the shaft ends and radial holes can be drilled and tapped as desired. The concentricity of the holes will be .005 inches TIR.
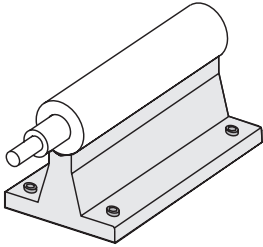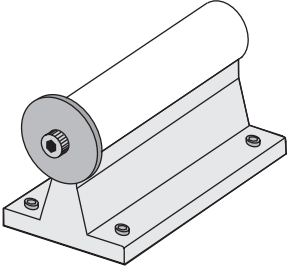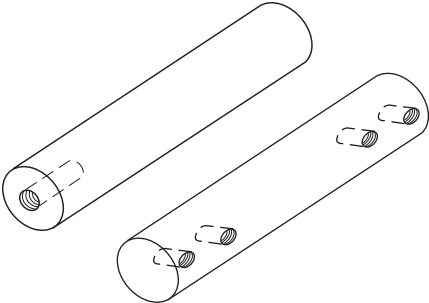
<p>Reduced Diameters</p> 	<p>End Stops</p> 	<p>Coaxial & Radial Holes</p> 
--	--	---

Butted, Doweled, and Threaded & Ground Joints

Standard shaft assemblies cannot be combined to create longer lengths, as the rolling elements of re-circulating linear bearings will "jam" at the joined ends due to the shaft chamfer. For those long length or custom applications, *LINTECH* provides several options for joining shaft assemblies. Butted, doweled, threaded, and ground joints are available with all shaft lengths and diameters. All of these options will have the standard chamfer removed from the shaft ends. The concentricity of doweled joints is < .001 inches, while the concentricity of butted joints will depend upon the user mounting surface.
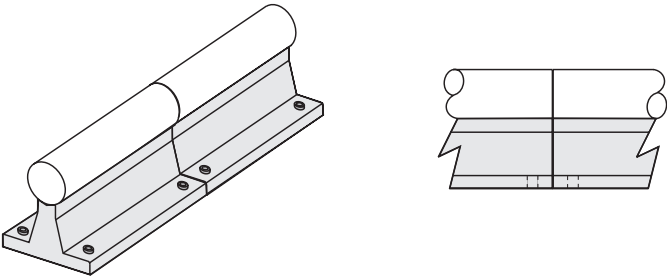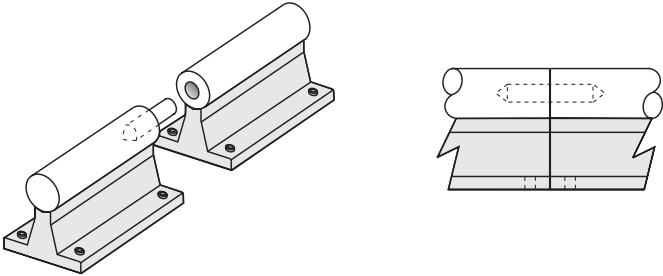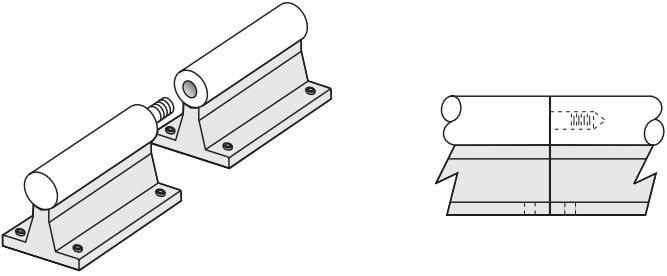
<p>Butt Joint</p> 	<p>Dowel Joint</p> 
<p>Threaded and Ground Joint</p> 	

Options

Custom Shaft Assembly Lengths & Widths

Custom shaft assembly lengths and widths (shorter and longer) not shown in this catalog can be provided upon request.

Metric Shaft Assemblies

Metric shaft assemblies can be provided upon request by combining SM shafting with the LSRS or ARS shaft supports.

Chrome Plated Shafts

For applications in high moisture, high humidity, clean room, or highly corrosive environments, chrome plating of the shafts will offer superior resistance to corrosion. The process uniformly deposits dense, hard, high Chromium alloy onto the shaft, and has a Rockwell C hardness value of 67-72. This process also conforms to MIL Spec: (MIL-C-23422). The chrome plating bonds to the parent steel and will not crack or peel off under the high point loading of the balls on the shaft. This chrome plating process differs from normal hard chrome which just lays on the surface of the part plated.


Shaft Support Finishes

The standard anodized finish of the aluminum shaft supports can be changed to meet the requirements needed for operation in clean rooms, food processing facilities, highly corrosive environments, or for different appearances. The standard enamel finish of the steel shaft supports can also be changed. Available options are clear or color anodized, chem-film, nickel plated, chrome plated, different oxide color finishes, or painted per customer specifications.

Shaft Support End Stops

End stops are available for every shaft assembly size and length. They provide a mechanical stop for the linear bearings to prevent them from sliding off the end of the shaft. The shaft ends are drilled, tapped, and a washer is installed using a cap screw and lock washer.

Number of ⁽²⁾ End Stops (see model #)	Nominal Shaft Dia. (inches)	Dimensions (inches)			
		A	B	C	D ⁽¹⁾ Cap Screw
E1, E2, E3, E4	0.500	.375	.062	1.125	1/4
E1, E2, E3, E4	0.625	.453	.062	1.375	5/16
E1, E2, E3, E4	0.750	.532	.062	1.625	3/8
E1, E2, E3, E4	1.000	.656	.109	1.812	7/16
E1, E2, E3, E4	1.250	.750	.125	2.250	1/2
E1, E2, E3, E4	1.500	.750	.125	2.625	1/2
E1, E2, E3, E4	2.000	.750	.125	3.250	1/2

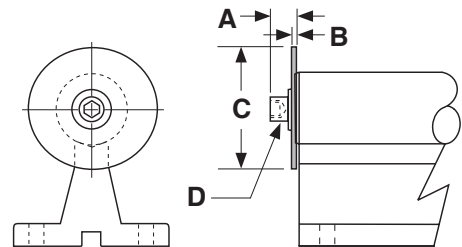

Footnotes:

- (1) Cap screw for end stops have black oxide finish. End stop & cap screw lock washers are Cadmium plated (QQ-P-416 Type II).
- (2) When only Specifying one end stop (E1) for SA, or two end stops for the TRSA (E2), the end stops will be installed on the left hand end of the assembly, as depicted by the above drawing, unless specified otherwise.

Unit Conversions

Torque Conversions

Present Units	Convert To	Multiply By
Gram-centimeters	newton-meters	0.0000981
Gram-centimeters	ounce-inches	0.0138874
Gram-centimeters	pound-inches	0.000868
Gram-centimeters	pound-feet	0.0000723
Newton-meters	gram-centimeters	10,197.162
Newton-meters	ounce-inches	141.612
Newton-meters	pound-inches	8.85
Newton-meters	pound-feet	0.73756
Ounce-inches	gram-centimeters	72.0077
Ounce-inches	newton-meters	0.007062
Ounce-inches	pound-inches	0.0625
Ounce-inches	pound-feet	0.005208
Pound-inches	gram-centimeters	1,152.0
Pound-inches	newton-meters	0.11299
Pound-inches	ounce-inches	16.0
Pound-inches	pound-feet	0.08333
Pound-feet	gram-centimeters	13,825.5
Pound-feet	newton-meters	1.3558
Pound-feet	ounce-inches	192.0
Pound-feet	pound-inches	12.0

Distance Conversions

Present Units	Convert To	Multiply By
Arc-minutes	degrees	0.016666
Arc-seconds	degrees	0.000277
Centimeters	inches	0.3937
Centimeters	feet	0.03280
Centimeters	microns	10,000.0
Degrees	arc-minutes	60.0
Degrees	arc-seconds	3,600.0
Degrees	radians	0.017453
Feet	centimeters	30.48
Feet	meters	0.3048
Inches	centimeters	2.54
Inches	Km	0.0000254
Inches	meters	0.0254
Inches	microns	25,400.0
Inches	millimeters	25.4
Km	inches	39,370.0
Meters	feet	3.2808
Meters	inches	39.37
Meters	microns	1,000,000.0
Microns	centimeters	0.0001
Microns	inches	0.00003937
Microns	meters	0.000001
Microns	millimeters	0.001
Millimeters	inches	0.03937
Millimeters	microns	1,000.0
Radians	degrees	57.295779

Reference : Handbook of Tables for Applied Engineering Science

Inertia Conversions

Present Units	Convert To	Multiply By
Gram-cm ²	ounce-inches ²	0.00546745
Gram-cm ²	ounce-inch-sec ² ...	0.000014161
Gram-cm ²	pound-inches ²	0.000341716
Gram-cm ²	pound-inch-sec ² ...	0.000000885
Gram-cm ²	pound-feet-sec ² ...	0.000000074
Ounce-inches ²	gram-cm ²	182.901
Ounce-inches ²	ounce-inch-sec ² ...	0.00259008
Ounce-inches ²	pound-inches ²	0.0625
Ounce-inches ²	pound-inch-sec ² ...	0.00016188
Ounce-inches ²	pound-feet-sec ² ...	0.00001349
Ounce-inch-sec ²	gram-cm ²	70,615.4
Ounce-inch-sec ²	ounce-inches ²	386.0
Ounce-inch-sec ²	pound-inches ²	24.13045
Ounce-inch-sec ²	pound-inch-sec ² ...	0.0625
Ounce-inch-sec ²	pound-feet-sec ² ...	0.00520833
Pound-inches ²	gram-cm ²	2,926.41
Pound-inches ²	ounce-inches ²	16.0
Pound-inches ²	ounce-inch-sec ² ...	0.0414413
Pound-inches ²	pound-inch-sec ² ...	0.00259008
Pound-inches ²	pound-feet-sec ² ...	0.00021584
Pound-inch-sec ²	gram-cm ²	1,129,850.0
Pound-inch-sec ²	ounce-inches ²	6,177.4
Pound-inch-sec ²	ounce-inch-sec ² ...	16.0
Pound-inch-sec ²	pound-inches ²	386.0
Pound-inch-sec ²	pound-feet-sec ² ...	0.0833333
Pound-feet-sec ²	gram-cm ²	13,558,200.0
Pound-feet-sec ²	ounce-inches ²	74,128.9
Pound-feet-sec ²	ounce-inch-sec ² ...	192.0
Pound-feet-sec ²	pound-inches ²	4,633.06
Pound-feet-sec ²	pound-inch-sec ² ...	12.0

Load Conversions

Present Units	Convert To	Multiply By
Grams	newtons	0.009806
Grams	ounces	0.03528
Grams	pounds	0.002204
Kilograms	pounds	2.2046
Newtons	grams	101.971
Newtons	ounces	3.59692
Newtons	pounds	0.224808
Ounces	grams	28.3495
Ounces	newtons	0.27802
Ounces	pounds	0.0625
Pounds	grams	453.592
Pounds	kilograms	0.45359
Pounds	newtons	4.44824
Pounds	ounces	16.0
Pounds	tons	0.0005
Tons	pounds	2,000.0

Terms of Sale

To Order

Any standard, or custom, product from *LINTECH* may be ordered by mail, email, on-line, phone, or fax from an Automation Specialist in your area. To obtain the name of your local Automation Specialist call:

***LINTECH*®**
1845 Enterprise Way
Monrovia, CA 91016

Toll Free: (800) 435 - 7494
Phone: (626) 358 - 0110
Fax: (626) 303 - 2035

Web Site: www.LintechMotion.com
E-Mail: Lintech@LintechMotion.com

All required options should be reviewed using the part numbering guide for each model series. Your local Automation Specialist or factory personnel can assist you with any questions you may have.

Delivery

All shipping promises are made in good faith. Any shipping dates appearing on acknowledgments of orders or given to a customer in any other manner are approximate. Where the customer delays in supplying information necessary to proceeding with an order, the date of shipment may be extended accordingly. Standard products from *LINTECH* are usually available for delivery within 2 to 6 weeks of receipt of a purchase order. However, component shortages, labor disputes, or any other unforeseen circumstance may delay the delivery of an order. *LINTECH* shall not be held liable under any circumstance. All products are shipped F.O.B. Monrovia, CA. *LINTECH* packages all standard and custom products carefully. However, *LINTECH* is not liable for damage incurred during shipment. Contact the carrier immediately if damage to a package or shipment is noticed upon receipt of such shipment.

Payment Terms

Unless otherwise specified, payment shall be made by C.O.D, credit card (AMEX, Visa, or Master Card), or net thirty (30) days (pending credit approval) from date of shipment of the items purchased hereunder in U.S. currency. *LINTECH* reserves the right to require deposit payments on non-standard items, customs, or product built to Buyer's designs or specifications. Amounts not timely paid shall bear interest at the rate of 1.5% for each month or a portion thereof that Buyer is late in making payments. No responsibility is assumed by *LINTECH* for damages arising from delivery delays, fires, strikes, material shortages, accidents, or any other cause whatsoever, and purchase orders are accepted subject only to these conditions irrespective of statements or stipulations on purchase orders.

Minimum Order Amount

LINTECH requires a minimum of \$30 List Price U.S. currency on all orders.

Warranty

All *LINTECH* products are guaranteed to be free from defects in material and workmanship, under normal use, for a period of one year after date of shipment. This warranty covers the repair or replacement of a product when it is sent prepaid to *LINTECH*. *LINTECH* does not assume liability for installation, abuse, alteration, insufficient application data provided for a design, or misuse of any positioning system. Products furnished by *LINTECH*, but not manufactured by *LINTECH* (motors, gearheads, encoders, amplifiers, etc....), are subject to the manufacturers standard warranty terms and conditions.

Returns

Any product requiring a return to *LINTECH* (for warranty or non-warranty repair) requires pre-approval from the factory prior to shipment. Contact the customer service department at (800) 435-7494 in order to obtain a RMA (Return Materials Authorization) number. At that time, please have your system Model & Serial numbers available, along with the reason for the return. The RMA number should be clearly marked on the returned package label and your packing list, or shipping document. Return product freight prepaid in its original package or one with comparable protection. *LINTECH* will not accept return shipments sent freight collect. Product damage incurred during return shipment, from poor packaging, will not be warranted by *LINTECH*. Keeping original packing materials is recommended until initial inspection and testing is completed.

Dimensions and Product Changes

Published dimensions shown in *LINTECH* catalogs are known to be accurate at time of printing. *LINTECH* shall not be held liable, under any circumstances, for any wrongly documented dimension or specification. Changes in design are made whenever *LINTECH* believes its products will improve by the change. No obligation to incorporate these changes in units manufactured prior to a change will be assumed.

Cancellations

All items entered for production and on which a cancellation is requested shall be paid for on the basis of actual cost of labor, materials, and supplies applied to the production of such items plus proper overhead expenses determined in accordance with good accounting practice, plus 25% of the total of such cost and expenses; provided that such cost and expense plus 25% shall in no case exceed 100% of the quoted price of original order. Upon cancellation, *LINTECH* may dispose of materials used in the manufacture of cancelled order as it sees fit.



Mechanical Motion Solutions

For over 49 years, *LINTECH*® has designed and manufactured numerous standard and custom mechanical motion control products that are used in a wide range of applications and markets. This document highlights cut to length round rail precision shafting, round rail linear bearings (with or without pillow blocks), steel & aluminum shaft supports, shaft assemblies (single & *TWINRAIL*®), *TWINRAIL*® carriage assemblies, profile rail linear bearings, rolled & ground ball screw assemblies, acme & ball screw driven actuators, belt driven slides, worm gear driven rotary tables, and a wide range of custom positioning assemblies.



1845 Enterprise Way
Monrovia, CA. 91016
Phone: (800) 435 - 7494
(626) 358 - 0110
Fax: (626) 303 - 2035

Web Site: www.LintechMotion.com
E-Mail: Lintech@LintechMotion.com

YOUR LOCAL AUTOMATION SPECIALIST: