



Nut Dimensions

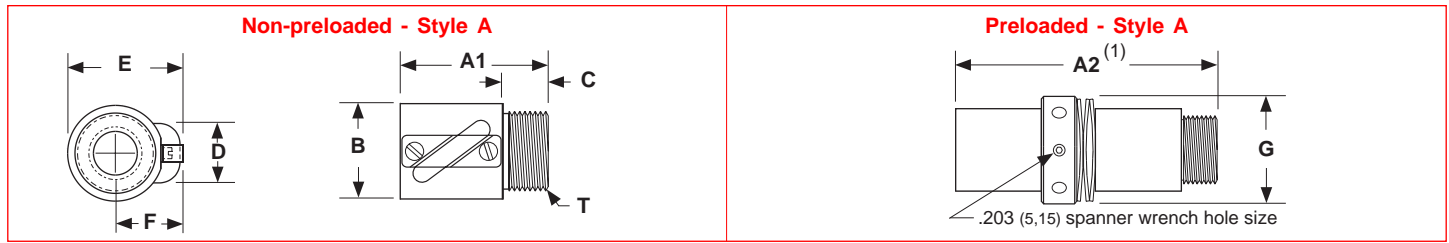

Nut Flange Dimensions

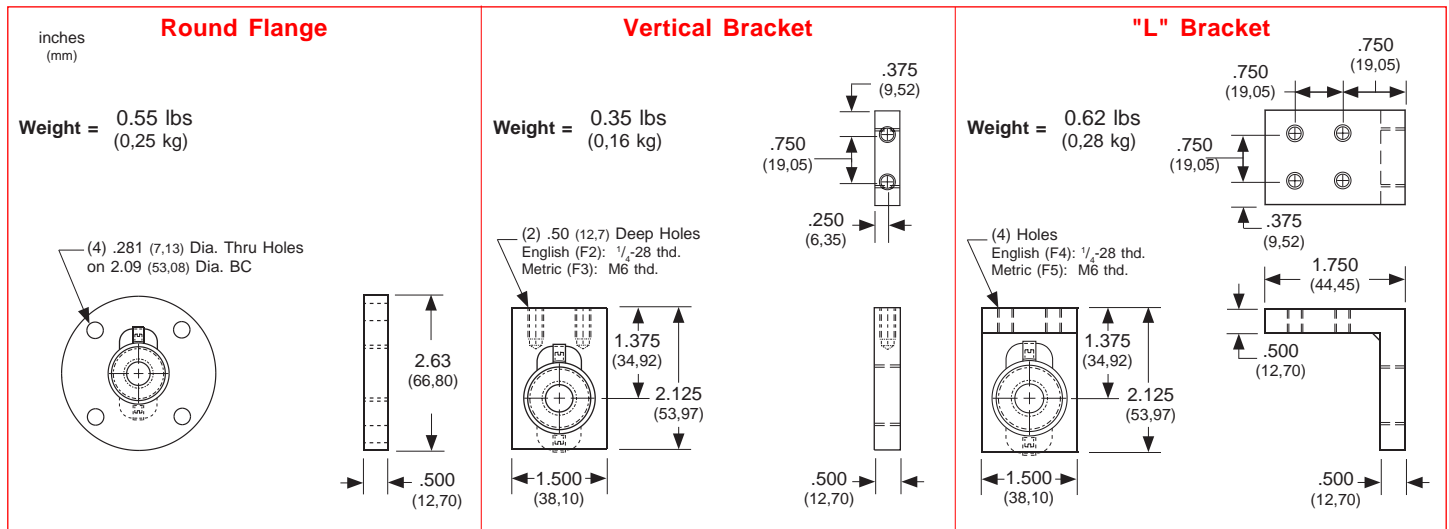

Model Number	Nut Style	Nut Dimensions inches (mm)									Nut Weight <sup>(3)</sup> lbs (kg)
		A1	A2 <sup>(1)</sup>	B	C	D	E	F	T - "V" Threads <sup>(2)</sup>	G	
PS062020	A	1.580 (40,13)	3.410 (86,61)	1.221 (31,01)	0.500 (12,70)	0.847 (21,51)	1.398 (35,51)	0.787 (20,00)	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	1.410 (35,81)	0.24 (0,11)
PS16M05M	A	1.580 (40,13)	3.410 (86,61)	1.221 (31,01)	0.500 (12,70)	0.847 (21,51)	1.398 (35,51)	0.787 (20,00)	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	1.410 (35,81)	0.24 (0,11)
PS16M10M	A	2.070 (52,59)	4.370 (111,00)	1.221 (31,01)	0.500 (12,70)	0.709 (18,01)	1.398 (35,51)	0.787 (20,00)	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	1.410 (35,81)	0.33 (0,15)
PS16M16M	A	2.170 (55,12)	4.630 (117,60)	1.221 (31,01)	0.500 (12,70)	0.847 (21,51)	1.398 (35,51)	0.787 (20,00)	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	1.410 (35,81)	0.30 (0,14)

Footnotes:

- (1) This is the length for a preloaded nut. Preloaded nut consists of two (2) non-preloaded nuts with a locking spanner nut, and belville springs.
- (2) All flange threads are internal (Type 2B) to match the external nut threads.
- (3) Weight of the non-preloaded nut. Multiply value by 2.1 to obtain the weight for the preloaded nut assembly.

Specifications subject to change without notice