



Nut Dimensions

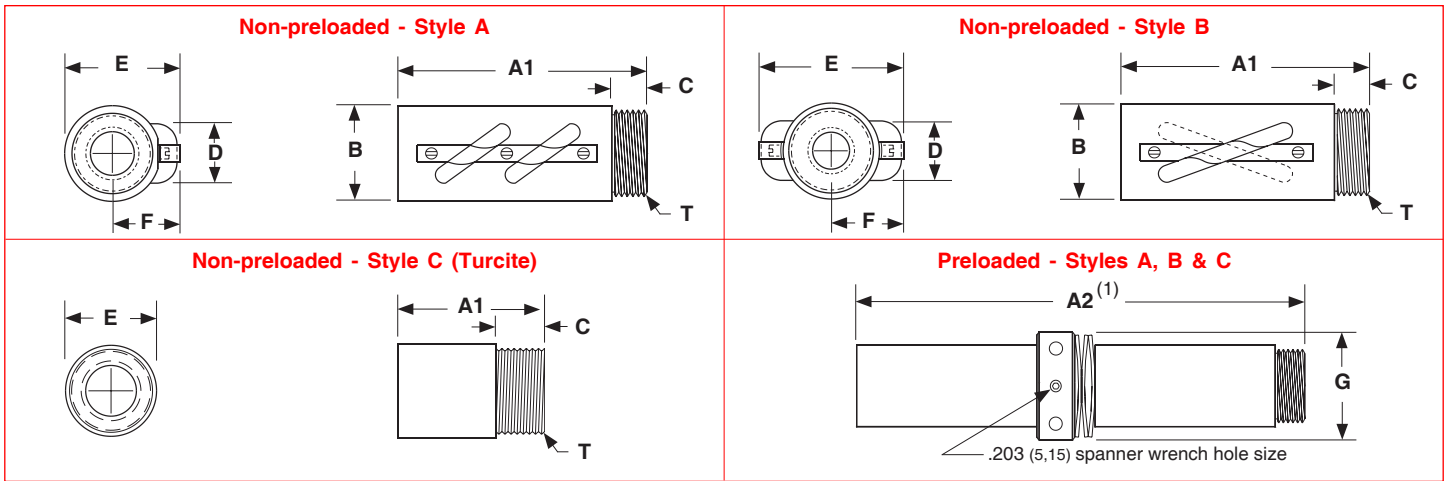

Nut Flange Dimensions

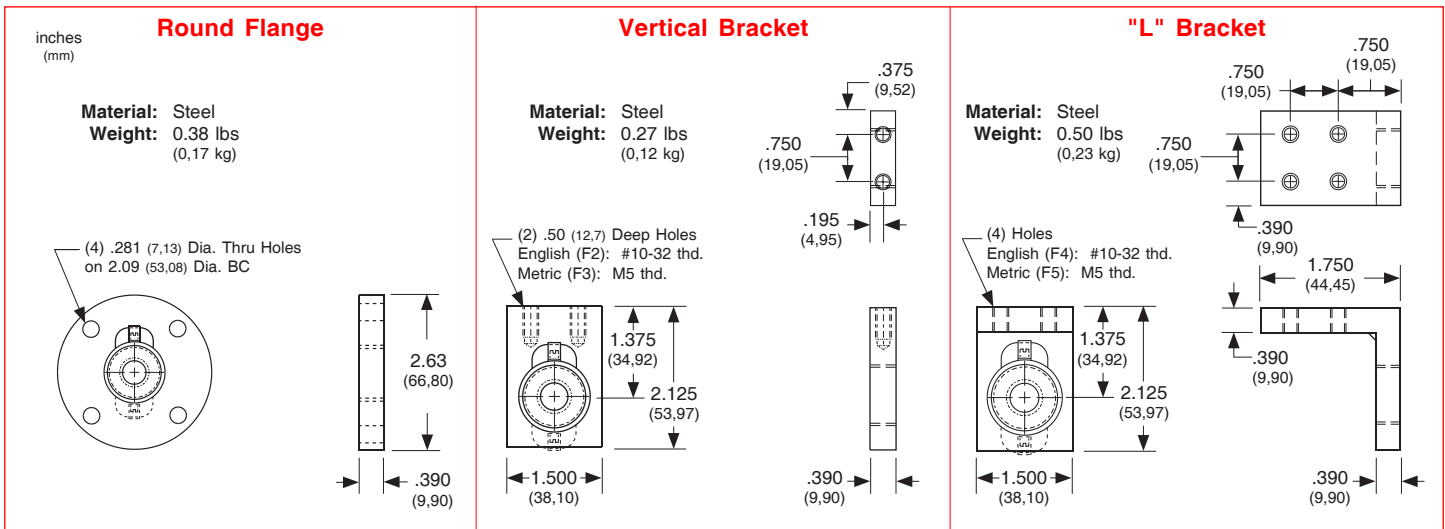

Model Number	Nut Style	Nut Dimensions									Nut Weight ⁽³⁾ lbs (kg)
		inches (mm)									
		A1	A2 ⁽¹⁾	B	C	D	E	F	T - "V" Threads ⁽²⁾	G	
RS050020	A	2.760 (70,10)	6.050 (153,67)	1.067 (27,10)	0.390 (9,90)	0.665 (16,89)	1.339 (34,01)	0.850 (21,59)	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	1.420 (36,07)	0.75 (0,34)
RS050050	B	2.760 (70,10)	6.050 (153,67)	1.070 (27,18)	0.390 (9,90)	0.667 (16,94)	1.630 (41,40)	0.860 (21,84)	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	1.420 (36,07)	0.50 (0,22)
RS050020	C	1.020 (25,91)	2.550 (64,77)	n/a	0.390 (9,90)	n/a	1.000 (25,40)	n/a	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	n/a	0.20 (0,09)
RS050050	C	1.020 (25,91)	2.550 (64,77)	n/a	0.390 (9,90)	n/a	1.000 (25,40)	n/a	15/16 - 16 UN-2A (23,81 - 16 UN-2A)	n/a	0.20 (0,09)

Footnotes:

- (1) This is the length for a preloaded nut. Preloaded nut consists of two (2) non-preloaded nuts with a locking spanner nut, and belville springs.
- (2) All flange threads are internal (Type 2B) to match the external nut threads.
- (3) Weight of the non-preloaded nut. Multiply value by 2.1 to obtain the weight for the preloaded nut assembly.