



Nut Dimensions

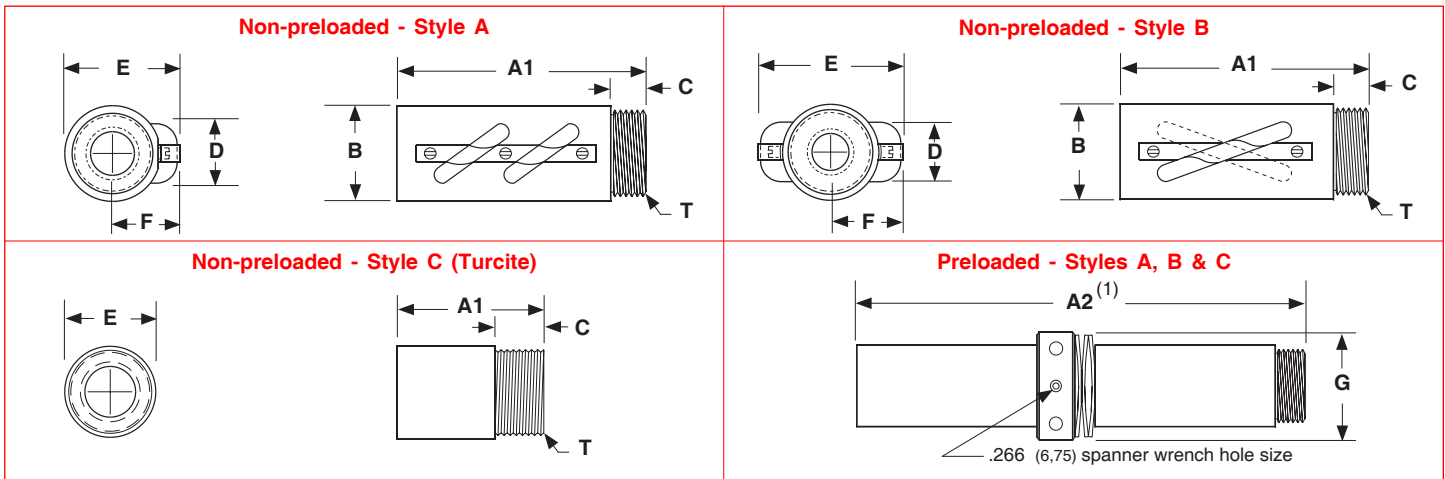

Nut Flange Dimensions

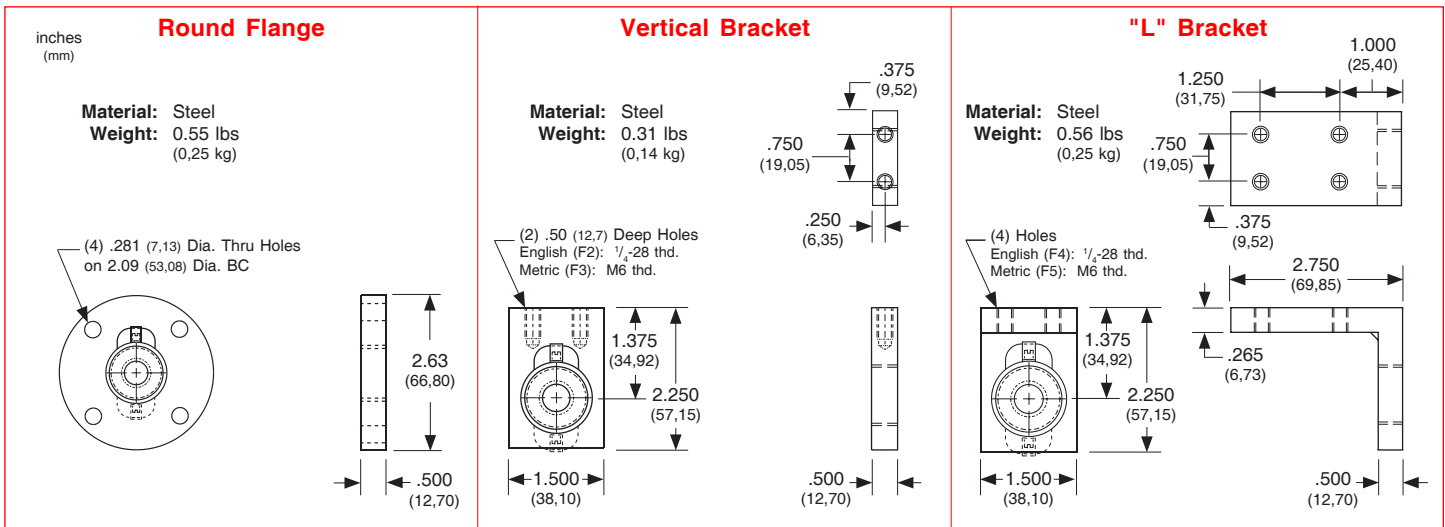

Model Number	Nut Style	Nut Dimensions inches (mm)									Nut Weight ⁽³⁾ lbs (kg)
		A1	A2 ⁽¹⁾	B	C	D	E	F	T - "V" Threads ⁽²⁾	G	
RS075020	A	2.890 (73,40)	6.080 (154,43)	1.317 (33,45)	0.505 (12,82)	0.917 (23,29)	1.521 (38,63)	0.940 (23,87)	1.173 - 18 UNS-2A (29,79 - 18 UNS-2A)	1.670 (42,41)	1.00 (0,45)
RS075050	B	2.940 (74,67)	6.180 (156,97)	1.317 (33,45)	0.505 (12,82)	0.983 (24,96)	1.984 (50,39)	1.060 (26,92)	1 1/4 - 16 UN-2A (31,75 - 16 UN-2A)	1.670 (42,41)	1.00 (0,45)
RS075020	C	1.510 (38,35)	3.520 (89,41)	n/a	0.505 (12,82)	n/a	1.500 (38,10)	n/a	1.173 - 18 UNS-2A (29,79 - 18 UNS-2A)	n/a	0.35 (0,15)
RS075050	C	1.510 (38,35)	3.520 (89,41)	n/a	0.505 (12,82)	n/a	1.500 (38,10)	n/a	1 1/4 - 16 UN-2A (31,75 - 16 UN-2A)	n/a	0.35 (0,15)

Footnotes:

- (1) This is the length for a preloaded nut. Preloaded nut consists of two (2) non-preloaded nuts with a locking spanner nut, and belville springs.
- (2) All flange threads are internal (Type 2B) to match the external nut threads.
- (3) Weight of the non-preloaded nut. Multiply value by 2.1 to obtain the weight for the preloaded nut assembly.