



Nut Dimensions

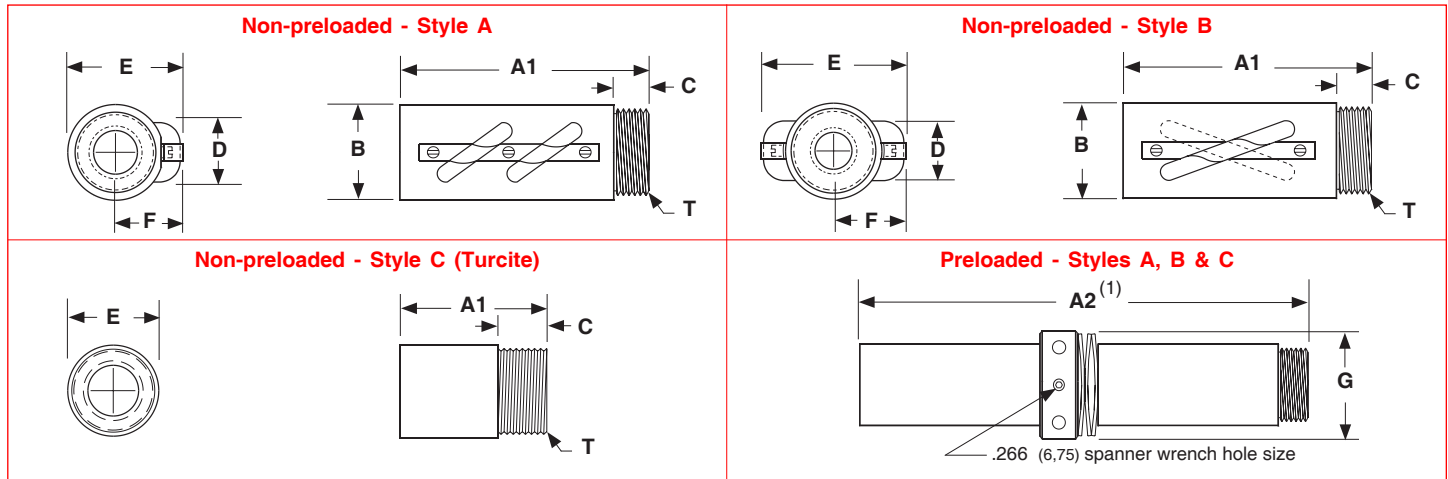

Nut Flange Dimensions

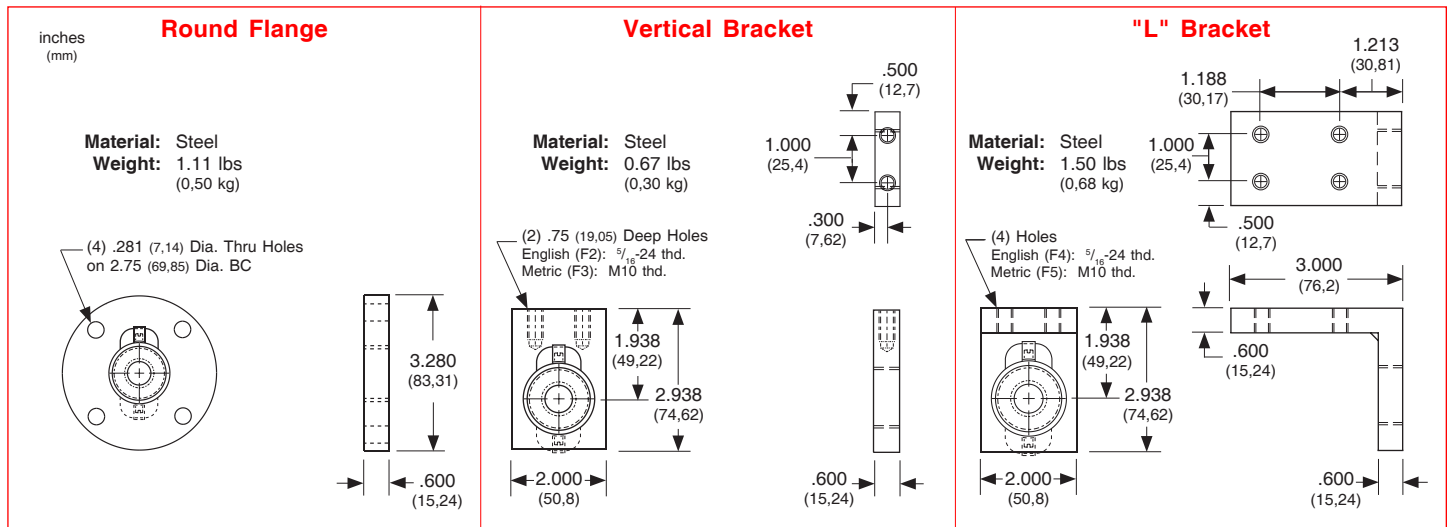

Model Number	Nut Style	Nut Dimensions inches (mm)									Nut (3) lbs (kg)
		A1	A2 ⁽¹⁾	B	C	D	E	F	T - "V" Threads ⁽²⁾	G	
RS100025	A	3.140 (79,76)	6.640 (168,66)	1.692 (42,98)	0.630 (16,00)	1.191 (30,25)	1.882 (47,80)	1.120 (28,45)	1 9/16 - 18 UNEF-2A (39,68 - 18 UNEF-2A)	2.070 (52,57)	1.25 (0,56)
RS100050	B	3.130 (79,50)	6.640 (168,66)	1.692 (42,98)	0.630 (16,00)	1.191 (30,25)	1.882 (47,80)	1.120 (28,45)	1 9/16 - 18 UNEF-2A (39,68 - 18 UNEF-2A)	2.070 (52,57)	1.25 (0,56)
RS100100	B	3.100 (78,74)	6.520 (165,61)	1.692 (42,98)	0.605 (15,37)	1.200 (30,48)	2.172 (55,17)	1.170 (29,72)	1 9/16 - 18 UNEF-2A (39,68 - 18 UNEF-2A)	2.070 (52,57)	1.25 (0,56)
RS100025	C	1.500 (38,10)	3.500 (88,90)	n/a	0.600 (15,24)	n/a	1.750 (44,45)	n/a	1 9/16 - 18 UNEF-2A (39,68 - 18 UNEF-2A)	n/a	0.35 (0,15)
RS100050	C	1.500 (38,10)	3.500 (88,90)	n/a	0.600 (15,24)	n/a	1.750 (44,45)	n/a	1 9/16 - 18 UNEF-2A (39,68 - 18 UNEF-2A)	n/a	0.35 (0,15)
RS100100	C	1.500 (38,10)	3.500 (88,90)	n/a	0.600 (15,24)	n/a	1.750 (44,45)	n/a	1 9/16 - 18 UNEF-2A (39,68 - 18 UNEF-2A)	n/a	0.35 (0,15)

Footnotes:

- (1) This is the length for a preloaded nut. Preloaded nut consists of two (2) non-preloaded nuts with a locking spanner nut, and belville springs.
- (2) All flange threads are internal (Type 2B) to match the external nut threads.
- (3) Weight of the non-preloaded nut. Multiply value by 2.1 to obtain the weight for the preloaded nut assembly.