


- Screw Drive -

- With Waycovers -

Dimensions & Specifications

Model Number	Travel Length inches (mm)	Table Dimensions inches (mm)		Mounting Dimensions inches (mm)			Screw Length inches (mm)	Table (1) Weight lbs (kg)
		A	B	C	D	M		
250606-WC1	6 (150)	15.25 (387,3)	18.25 (463,5)	2.370 (60,2)	3	8	17.05 (433)	54.0 (24,5)
250612-WC1	12 (300)	22.12 (561,8)	25.12 (638,0)	2.310 (58,7)	5	12	23.92 (608)	69.0 (31,3)
250618-WC1	18 (455)	29.25 (742,9)	32.25 (819,1)	2.370 (60,2)	7	16	31.05 (789)	85.0 (38,6)
250624-WC1	24 (605)	36.12 (917,4)	39.12 (993,6)	2.310 (58,7)	9	20	37.92 (963)	101.0 (45,8)
250630-WC1	30 (760)	43.12 (1095,2)	46.12 (1171,4)	2.310 (58,7)	11	24	44.92 (1141)	117.0 (53,1)
250636-WC1	36 (910)	50.12 (1273,0)	53.12 (1349,2)	2.310 (58,7)	13	28	51.93 (1319)	133.0 (60,3)
250648-WC1	48 (1215)	64.00 (1625,6)	67.00 (1701,8)	2.250 (57,1)	17	36	65.80 (1671)	164.0 (74,4)
251206-WC1	6 (150)	21.25 (539,7)	24.25 (615,9)	1.870 (47,5)	5	12	23.05 (585)	79.0 (35,8)
251212-WC1	12 (300)	28.12 (714,2)	31.12 (790,4)	1.810 (46,0)	7	16	29.93 (760)	95.0 (43,1)
251218-WC1	18 (455)	35.25 (895,3)	38.25 (971,5)	1.870 (47,5)	9	20	37.05 (941)	111.0 (50,3)
251224-WC1	24 (605)	42.12 (1069,8)	45.12 (1146,0)	1.810 (46,0)	11	24	43.92 (1116)	127.0 (57,6)
251230-WC1	30 (760)	49.12 (1247,6)	52.12 (1323,8)	1.810 (46,0)	13	28	50.92 (1293)	143.0 (64,9)
251236-WC1	36 (910)	56.12 (1425,4)	59.12 (1501,6)	1.810 (46,0)	15	32	57.92 (1471)	158.0 (71,7)
251248-WC1	48 (1215)	70.00 (1778,0)	73.00 (1854,2)	1.750 (44,4)	19	40	71.80 (1824)	190.0 (86,2)

06 = 6 inch (152,4 mm) carriage length; 2 bearings; carriage weight = 14.0 lbs. (6,35 kg)  
 12 = 12 inch (304,8 mm) carriage length; 4 bearings; carriage weight = 26.0 lbs. (11,79 kg)

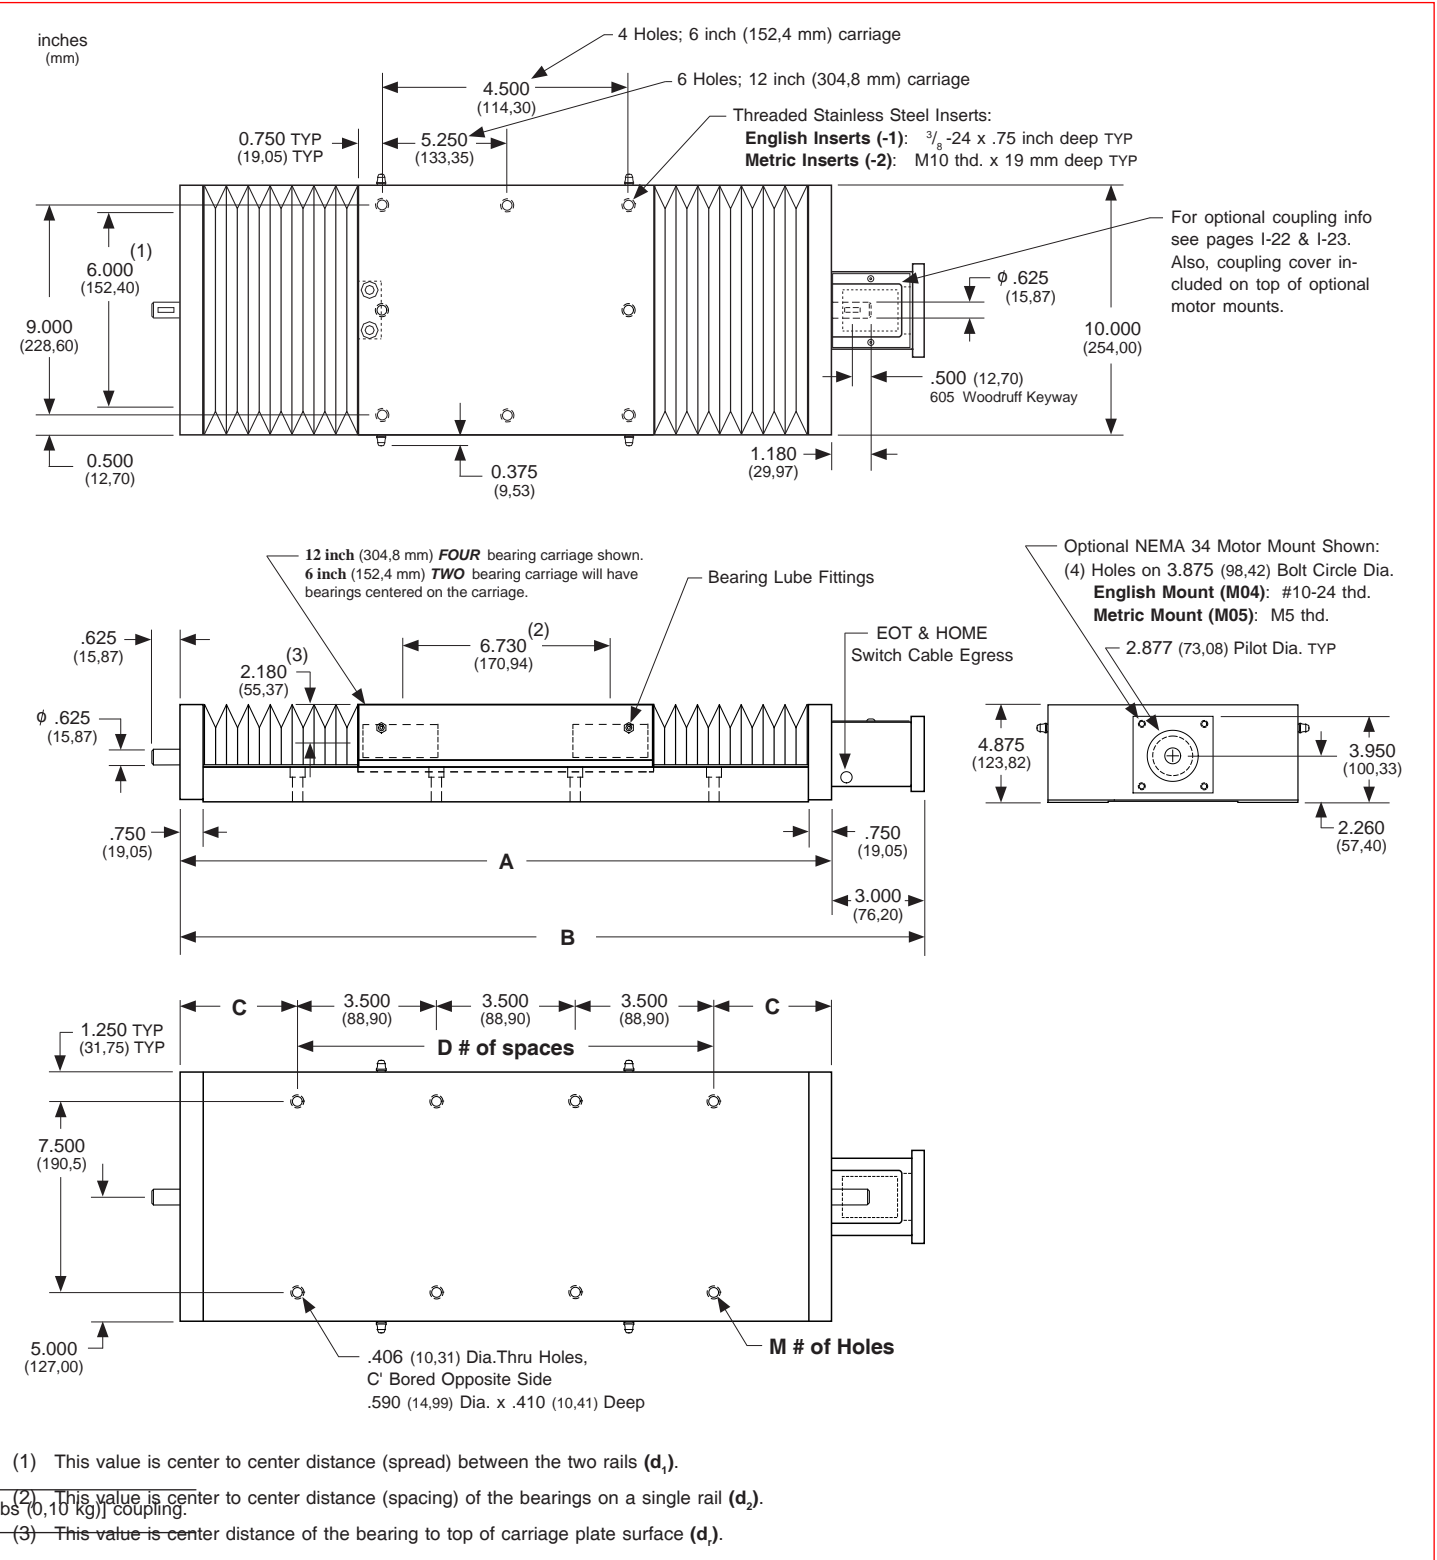

**Footnotes:**  
 (1) Weight shown is with a 1.000 inch (25 mm) diameter screw, a NEMA 34 motor mount [0.54 lbs (0,24 kg)], and a C125 style [0.22 lbs (0,10 kg)] coupling.